

TRI **MEC**

LG Medium Voltage Vacuum Contactors



LG Industrial Systems

www.lgis.com

Customer satisfaction through quality and service- LG medium voltage vacuum contactors

LG medium voltage vacuum contactors using LG vacuum interrupters manufactured with worldclass technology are type tested in LG PT & T that is accredited high power test lab by worldclass KOLAS.



Contents



Features	4	Electrical circuit diagram	20
Technical data	10	Internal connection diagrams	22
Ordering information	12	External dimensions	24
External view	14	Selection tables	28
Safety components	15	Power fuse	30
Internal structure	16	Power fuse selection guides	31
Vacuum interrupters	17	Coordination graph	32
Accessories	18	Operation curves	34
Drawing operations	19		



LG Vacuum Contactors

We have the major technology that others can not catch up.
LG vacuum contactors provide high withstand-current strength and switching capacity as well as versatile auxiliary functions.



Fixed type

Drawout type (Standard type)

General description



LG Tri-MEC vacuum contactors are mainly used for the switching of motors, transformers, capacitors in AC power lines. They can be installed in multi-stack cubicles.

A vacuum contactor comprises several assemblies such as switching mechanism including vacuum interrupters, magnetic actuator, high strength molded front cover and auxiliary devices. Stable and high operating cycle is executed by the vacuum interrupters made of high alumina ceramic tube which makes it possible to degas in a high temperature with excellent mechanical strength.

Actuating is available either at instantaneous or continuous excitation. Functions for safety in connecting and disconnecting are also provided.



E-Class Cradle



F₂-Class Cradle



G-Class Cradle



Direct-drawout type - for MCSG



Fuse connectable type (Standard type)



Fuse connectable type (Direct-drawout type)

Operation conditions

Ambient temperature : -5 to 40°C


Maximum temperature of 24-hour mean : 35 °C

Altitude : 1000m

Humidity : 24-hour measured average - max. 95% RH
1 month measured average - max. 90% RH

Applied standards

IEC Pub. 60470, IEC 60282-1, JEM 1167, KEMC 1126

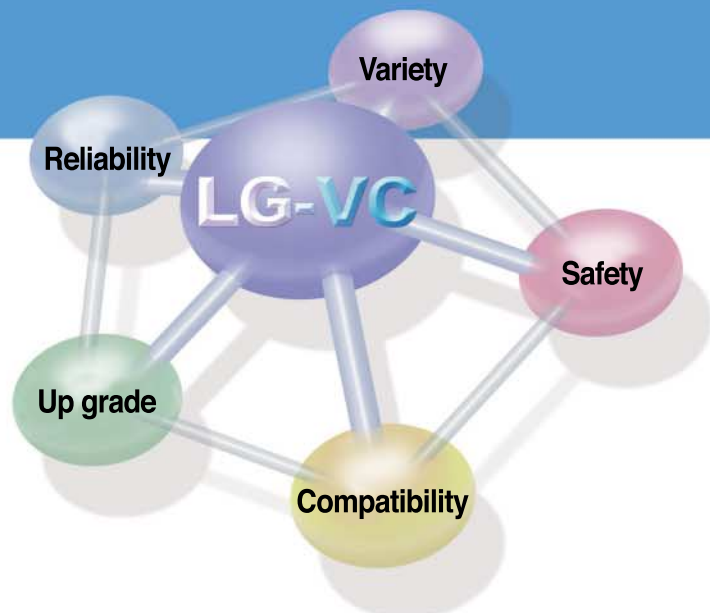


Up-graded performance

Rated short-time current 6.3kA

[6.3kA]

Performance is up-graded to rated short-time current 6.3kA/1sec,
and switching capacity 4kA according to IEC60470.

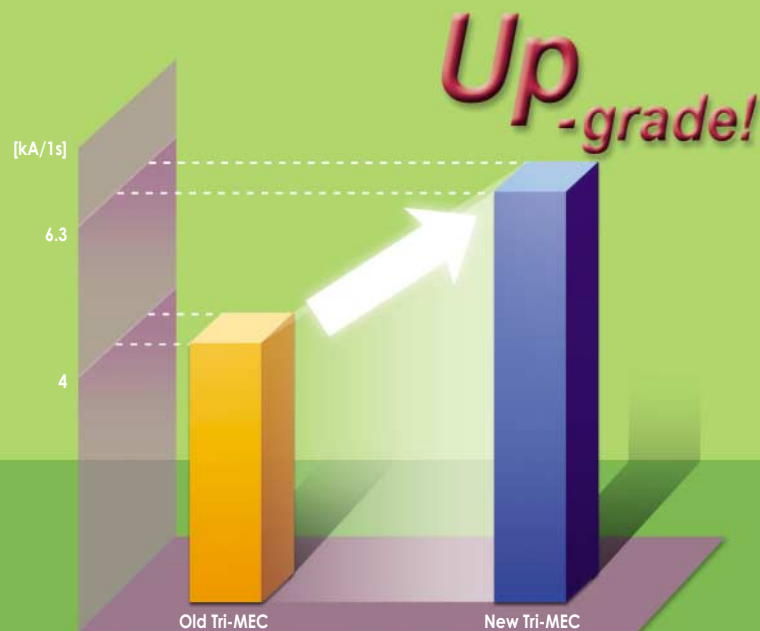

Vacuum interrupter & Fuse



High performance, high reliability and long service life

LG vacuum interrupters that comply with IEC, ANSI and NEMA standards are manufactured by the process of brazing and degassing together in a high vacuum furnace to assure high reliability.

Superior mechanical strength and degasing

Providing long service life and suited for frequently operating purpose due to using high alumina ceramic tube and degassing in a high temperature.

High speed interruption and short arcing time

It has fast recovering characteristic of vacuum insulation. When opening it breaks the current at the first current-zero point to minimize the wearing of contacts.

Short-circuit protection [40kA]

Power fused type vacuum contactors, in-house tested according to IEC 60282-1, can provide short-circuit protection up to 40kA.



Reliable interruption of fault current

LG current limiting power fuse can protect the devices and systems from fault current by interrupting within half cycle.

High current such as short-circuit current cause a fuse blown out due to the reaction on the material inside of a fuse within such a short time.

Applied standards

IEC 282-1, DIN 43625, BS 2692, KSC 4612



Power fuse

Compatibility


[1 : 1]

Compatible with LG conventional type.

User can saving the replacement cost because cradle size is same as conventional type.



Alternation

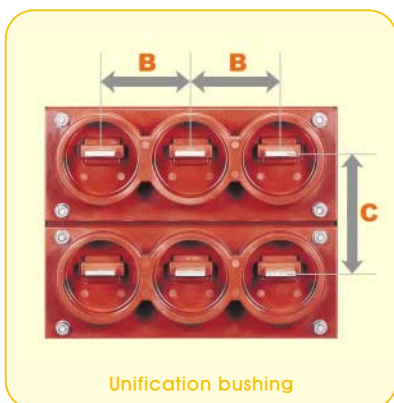

Unification bushing

Compatible with LG conventional type

New Tri-MEC vacuum contactors are customer-oriented devices designed for user-friendly and maintenance free.

All dimensions related to connection such as rail distance and phases distances are the same as those of LG conventional types. This means no additional cost is required for replacement.

Note) G-Class drawout type cradle is not applied.

A : Distance between rails

B : Distance between phases

C : Distance between line and load terminals

[Safety]


LG Tri-MEC vacuum contactors provide several auxiliary functions for safe and comfortable use.



- Interlock
- Drawout cradle for MCSG
- One-molded fuse holder
- Fuse checker and micro switch



Additional equipment

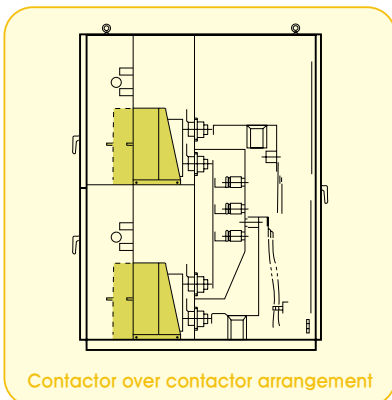

Contactor over contactor arrangement

Suitable for Metal Clad Switchgear

The structure of G type cradle unification bushings and single-molded fuse-holder barrier enables vacuum contactors to build Metal Clad Switchgears.

Directly withdrawable equipment

This enables the withdrawing of a vacuum contactor from a panel without opening a door to prevent any possibility of electric shock.

Interlock

For the safety of a operator interlock is equipped as standard.

Auxiliary contacts

Available up to 5NO+5NC.

Note) Additional auxiliary contact will be developed on 2003.

Technical data

		Fixed (Z) type				Drawout (D) type				Direct-drawout (DB) type - for MCSG			
Type		LVC-3Z -42ED	LVC-6Z -42LD	LVC-3Z -44ED	LVC-6Z -42LD	LVC-3D -42ED	LVC-6D -42LD	LVC-3D -44ED	LVC-6D -42LD	LVC-3DB -42ED	LVC-6DB -42LD	LVC-3DB -44ED	LVC-6DB -42LD
Classification													
Type of magnetizing		Continuous	Latch	Continuous	Latch	Continuous	Latch	Continuous	Latch	Continuous	Latch	Continuous	Latch
Rated voltage	Ur [kV]	3.6	7.2	3.6	7.2	3.6	7.2	3.6	7.2	3.6	7.2	3.6	7.2
Rated insulation													
	Dielectric strength (60Hz) Ud [kV/min]	20				20				20			
	Impulse withstand Up [kVp]	60				60				60			
Rated frequency	fr [Hz]	50/60				50/60				50/60			
Rated operational current	Ie [A]	200		400		200		400		200		400	
Short-time withstand current													
	30 sec Ik [A]	2500				2500				2500			
	1sec Ik [A]	6300				6300				6300			
Rated peak withstand current	Ip [kA peak]	16.4				16.4				16.4			
Rated short-circuit time	tk [s]	1				1				1			
Rated short-circuit breaking current	Isc [kA]	3.2				3.2				3.2			
Rated short-circuit making current	Ima [kA]	3.2				3.2				3.2			
Switching frequency	[op./hour]	1200	300	1200	300	1200	300	1200	300	1200	300	1200	300
Switching category (AC3)													
	100 closing operations [A]	3200				3200				3200			
	25 opening operations [A]	3200				3200				3200			
Thermal current	Ith [A]	200		400		200		400		200		400	
Mechanical life		3,000,000	500,000	3,000,000	500,000	3,000,000	500,000	3,000,000	500,000	3,000,000	500,000	3,000,000	500,000
Electrical life		300000				300000				300000			
Short-circuit breaking capacity (O-3min-CO-2min-CO)	[A]	4000				4000				4000			
Application conditions													
	Altitude without Derating	Lower than 1000m				Lower than 1000m				Lower than 1000m			
	Ambient	-5 to +40°C				-5 to +40°C				-5 to +40°C			
	Relative humidity	Less than 90% (Avg. 1 Month)				Less than 90% (Avg. 1 Month)				Less than 90% (Avg. 1 Month)			
Weight	[kg]	24				41				56			
Auxiliary contact ratings													
	Arrangement	3a3b	2a2b	3a3b	2a2b	2a2b				2a2b			
	Current [A]	10(A600)				10(A600)				10(A600)			
	Voltage [V]	600Max ~ 48Min				600Max ~ 48Min				600Max ~ 48Min			
Max. Applicable Capacity													
	Motors [kW]	750	1500	1500	3000	750	1500	1500	3000	750	1500	1500	3000
	Transformers [kVA]	1000	2000	2000	4000	1000	2000	2000	4000	1000	2000	2000	4000
	Capacitors [kVA]	750	1500	1200	2000	750	1500	1200	2000	750	1500	1200	2000

Power fuse

Power fuses can be installed into combination(G, GB) type contactors for the protection of equipments and systems from short-circuit.

Fuse ratings are selected properly after system analysis and some accessories such as fuse link clips should be selected by the fuse rating.





Combination drawout (G) type				Combination direct-drawout (GB) type - for MCSG				IEC60470 (ed 2000-05)
LVC-3G -42ED	LVC-6G -42LD	LVC-3G -44ED	LVC-6G -42LD	LVC-3GB -42ED	LVC-6GB -42LD	LVC-3GB -44ED	LVC-6GB -42LD	
Continuous	Latch	Continuous	Latch	Continuous	Latch	Continuous	Latch	4.1 Rated Voltage (Ur)
3.6	7.2	3.6	7.2	3.6	7.2	3.6	7.2	
20				20				4.2 Rated insulation level
60				60				
50/60				50/60				4.3 Rated frequency (fr)
200		400		200		400		4.101 Rated operational current (Ie)
2500				2500				4.5 Rated short-time withstand current (Ik)
6300				6300				
16.4				16.4				4.6 Rated peak withstand current (Ip)
1				1				4.7 Rated duration of short-circuit (Tt)
3.2/40 (with fuses)				3.2/40 (with fuses)				4.107 Coordination with short-circuit protective devices
3.2/40 (with fuses)				3.2/40 (with fuses)				4.107 Coordination with short-circuit protective devices
1200	300	1200	300	1200	300	1200	300	4.102 Rated duties
3200				3200				4.103, 4.104 Rated load and overload characteristics, by utilization category
3200				3200				
200		400		200		400		4.4.101 Thermal current (Ith)
3,000,000	500,000	3,000,000	500,000	3,000,000	500,000	3,000,000	500,000	4.106 Electrical endurance
300000				300000				
4000				4000				
Lower than 1000m				Lower than 1000m				
-5 to +40°C				-5 to +40°C				
Less than 90% (Avg. 1 Month)				Less than 90% (Avg. 1 Month)				
46				62				
2a2b				2a2b				
10(A600)				10(A600)				
600Max ~ 48Min				600Max ~ 48Min				
750	1500	1500	3000	750	1500	1500	3000	
1000	2000	2000	4000	1000	2000	2000	4000	
750	1500	1200	2000	750	1500	1200	2000	

Power fuse ratings

Standard	Type	Rated voltage(kV)	Rated current(A)	Diameter (mm)	Fuse clip code	Application	
DIN type	LFL-3/6G-□B	3.6/7.2	5, 10, 20, 30, 40, 50, 63, 75, 100, 125	45	4	All application including transformers, motors and capacitors	
	LFL-3G-□B	3.6	160, 200				
	LFL-6G-□B	7.2	160, 200				
KS type	General use	LFL-3/6G-□	5(T1.5), 10(T3), 20(T7.5), 30(T15), 40(T20), 50(T30), 60(T30)	50	5	General use transformers capacitors.	
			75(T50), 100(T75)	60	6		
		LFL-3G-□	150(T100), 200(T150)	60	6		
		300(T250), 400(T300)	77	7			
	LFL-6G-□	150(T100), 200(T150)	77	7			
	For motors	LFL-3M-□	3.6	M20, M50, M100	60	6	Motors capacitors.
				M150, M200	77	7	
M300, M400				87	8		
LFL-6M-□	7.2	M20, M50	60	6			
		M100, M150, M200	77	7			
		M300, M400	87	8			

Note) Fuses, types LFL-6G-300 and LFL-6G-400, are not able to built in vacuum contactors. Refer to the power fuse catalog for more detail.

Ordering information

Contactor

LVC·3Z·42E D

Control voltage(kV)		Fuse checker		PT		Position Switch		FUSE Clip		FUSE type	
D1	DC 110	0	Without	0	Without PT	0	Without	0	-	0	LFL-3/6G-5~100
A1	AC 110	1	With	1	1EA of 100Var	1	With	4	φ 45		LFL-3G-150~400
A2	AC 220	1	With	2	2EA of 100Var	1	With	5	φ 50		LFL-6G-150, 200
				3	1EA of 200Var			6	φ 60		LFL-3/6G-5B~100B
				4	2EA of 200Var			7	φ 77		LFL-3M-20~400
								8	φ 87		LFL-6M-20~200
									1		LFL-3/6G-125B
											LFL-3G-160B, 200B
										LFL-6G-160B, 200B	
										LFL-6M-300, 400	



Note) Refer to the fuse rating on page 11

Contactor type

LVC 3 Z 4 2 E D

LG Vacuum Contactor	Rated voltage(kV)		Installation		Breaking current(kA)		Rated current(A)		Control method		Modification No.	
		3	3.6	Z	Fixed type	4	4	2	200	E	Continuous excitation	D
	6	7.2	D	Drawout type			4	400	L	Instantaneous excitation	C	Conventional type
			G	Combination drawout type (Fuse connectable)								
			DB	Direct-drawout type (For MCSG)								
			GB	Combination direct-drawout type (Fuse connectable and for MCSG)								

Cradle

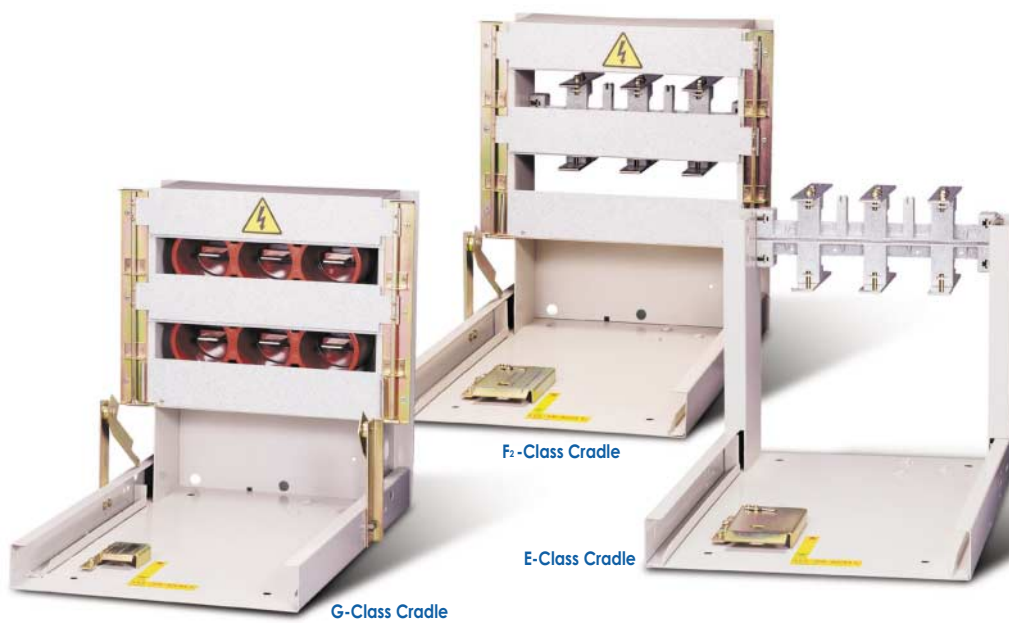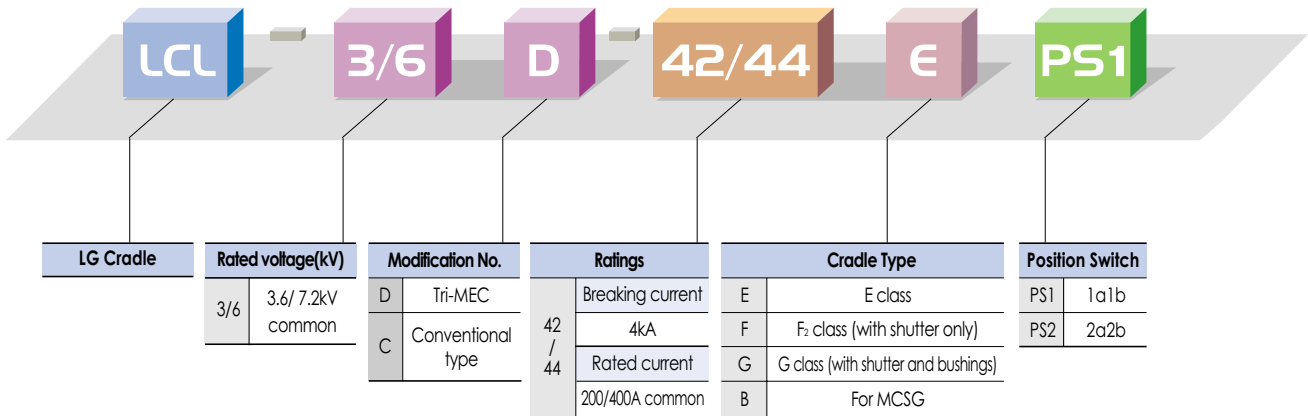

External view




- ① Front cover
- ② Fuse checking window
- ③ Connector
- ④ Push button(Interlock lever)
- ⑤ Handle(Draw-in and Drawout)
- ⑥ ON/OFF indicator
- ⑦ Operation counter
- ⑧ Manual trip button
- ⑨ Drawout carrier
- ⑩ Direct drawout carrier
- ⑪ Interlock lever
- ⑫ Interlock button
- ⑬ Hole for Interlock lever insertion
- ⑭ Test/Run indicator
- ⑮ Cradle
- ⑯ CTD(Condensor trip device)
- ⑰ Fuse case

CTD(Condensor Trip Device)



CTD is built as standard in the contactor with AC control of instantaneous excitation so that the contactor can be tripped within 30 seconds in the event of an electricity failure. The automatic trip circuit in the event of an electricity failure is to be built by a customer.

Rating	Description	
	Type	CTD-100
Rated input voltage(V)	AC 100/110	AC 200/220
Frequency(Hz)	50/60	50/60
Rated impulse voltage(V)	140/155	280/310
Charging time	Within 5 sec.	Within 5 sec.
Trip command possible time	Min 3 min.	Min 2 min.
Input voltage range	85%~110%	85%~110%
Capacitor rating(μF)	400	160

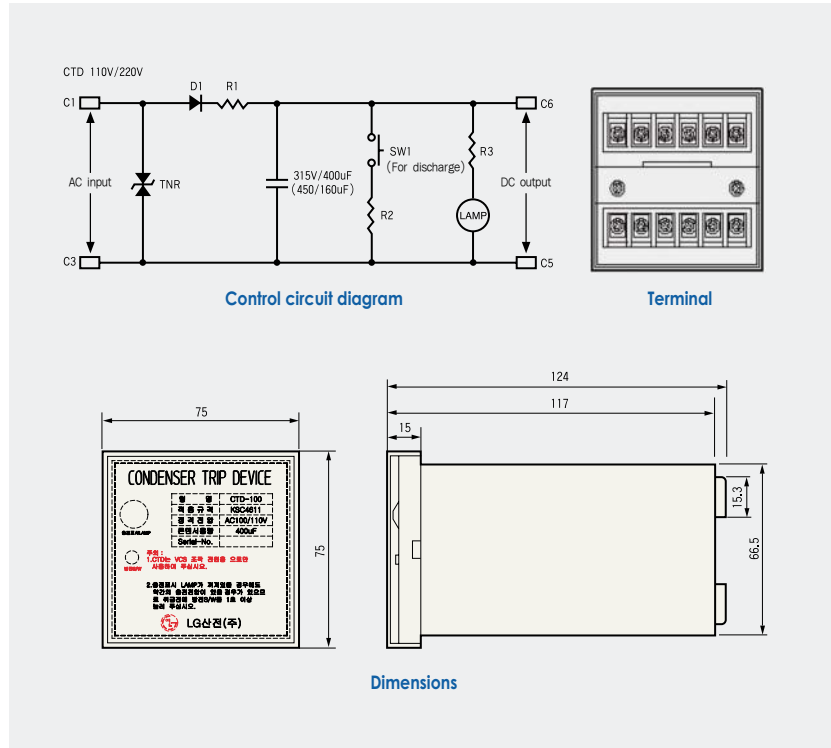

Fuse case

Made of high strength BMC resin to offer superior insulation and safety.

Note) Applied fuse combination type.



Counter

This is a ON/OFF operation counter by using 5 digit.



Bushing

It is mono-block bushing to be used in the cradles of G-type drawout contactors. It provides high insulation level, so recommended to use in contactors for MCSG.


Note) Applied G-Class Cradle.



Test/Run position indicator

This enables checking contactor positions visibly when connecting or disconnecting a contactor.

Note) Applied direct drawout type only.



Direct-drawout carrier

It is a screw-sliding type drawout equipment to draw-in and draw-out a contactor directly out of a panel for personal safety. It is built in DB and GB type contactors.



ON/OFF indicator

To visibly check whether power is supplied or not



Lever

It is a bent-lever to actuate a direct-drawout carrier by inserting and turning in DB and GB type contactors



Fuse checking window

Enables the visible check of a fuse like its outside status and temperature-rise in a fuse combination type contactor.

Internal structure

Main contact part

Consists of vacuum interrupters, main terminals and moving shunts that are supported by a one-moulded frame that maintains insulation between phases. Vacuum interrupters are operated by means of the actuating mechanism that is connected to movable parts of a vacuum interrupter with a insulation rod.


Actuating mechanism

Designed simply without any linkage to be suited for frequent-operation and long service life. The actuating lever connected to a moving core of a actuating magnet that carries out the function of a actuating shaft moves up and down to control the contact pressure for stable operations.

Control method

Continuous excitation - During a contactor is closed the control coil is required to be excited continuously to pull the moving core magnetically. In case of discontinuing the control power the moving core is to be returned by a spring because of the disappearance of magnetic force, which causes the opening of a contactor.

Instantaneous excitation - In this method the continuous exciting of a control coil to maintain the closing of a contactor is not required as the latch built in it holds the mechanism. In case of manual tripping, a contactor will be tripped by releasing the latch when turn on the manual trip button.

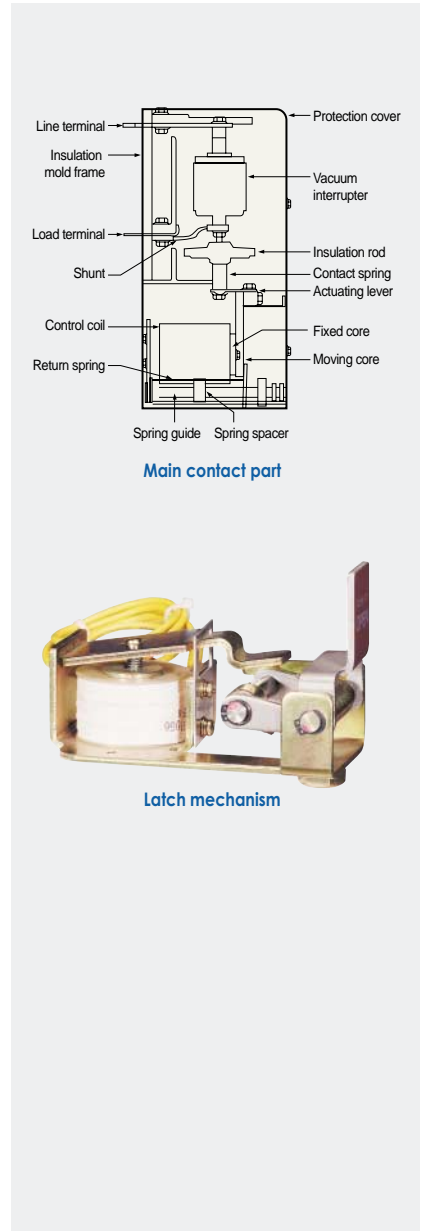

Continuous excitation



Instantaneous excitation

Type	Control method	Control voltage (V)	Closing current(A)/time(ms)	Trip current(A)/time(ms)	Holding current(A)/time(ms)	Pick-up voltage	Drop-out voltage	Tripping voltage
LVC-3/6□-42/44ED	Continuous excitation(E)	DC 110	3/100	-	0.6/40	85%	75%	-
		AC 110	3/100	-	0.6/40			
		AC 220	2/100	-	0.3/40			
LVC-3/6□-42/44LD	Instantaneous excitation(L)	DC 110	4.5/145	3/35	-	85%	75%	10%-75%
	Instantaneous excitation(L) (With CTD)	AC 110	4.5(6)/145	3(4)/35	-			
		AC 220	3(4)/145	10(14)/35	-			


Note) The values in () are maximum allowable currents in case of using CTD. (voltage increment considered)

Features

Vacuum interrupters

In the closed position, normal current flows through the interrupter. When a fault occur and interruption is required, the contacts are quickly separated. The arc which is oriented between surfaces of contact shall diffuse at the contact structure of flat shape. It prevents local heating and damage. The arc burns in an ionized metal vapor, which condenses on the surrounding metal shield.



The arc is extinguished and vapor production is ceased at current zero. The metal vapor plasma is very rapidly dispersed, cooled, recombined, and deionized, and the metal vapor products are quickly condensed so that the contacts withstand the transient recovery voltage.

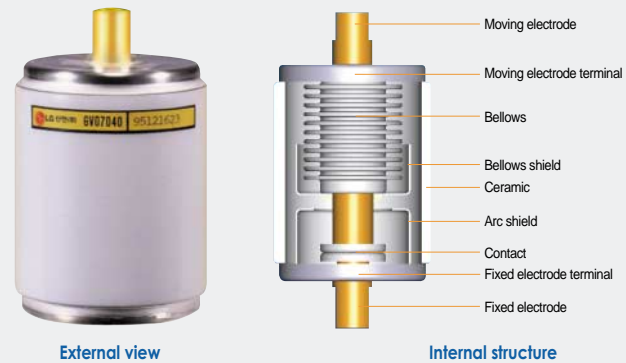

LG vacuum interrupters consists of spiral contact, the material of which is CuCr to provide a long service life and high withstand voltage characteristic.

Ratings

Rated voltage	(kV)	7.2
Rated current	(A)	400
Rated interrupting current	(kA)	4.5
Contact stroke	(mm)	4.75
Opening speed average	(m/s)	0.6
Closing speed average	(m/s)	0.3
Contact force	(kg)	7 Min
Moving side weight	(kg)	0.23
Interrupter weight	(kg)	0.52
Max. contact erosion	(mm)	1

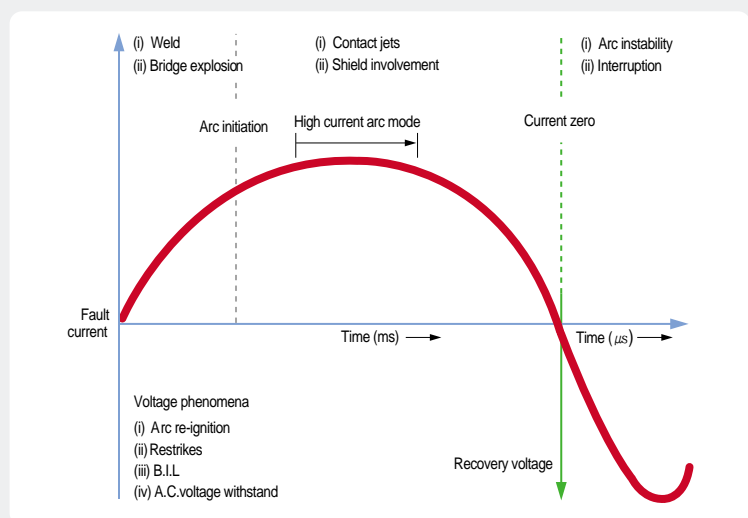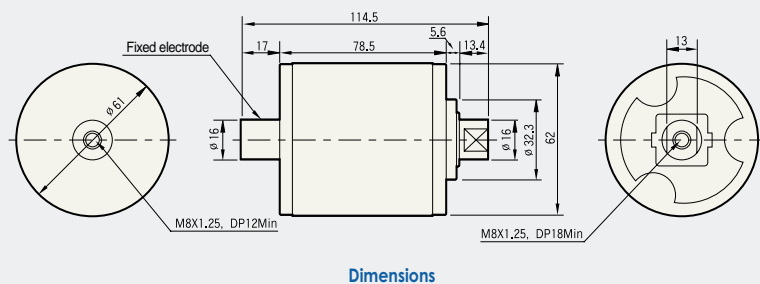



AC arcing and interruption phenomena in vacuum

Accessories

Fuse checker / Micro switch

Fuse checker is operated in case of fuse blowing and output mechanical signal at same time. A micro switch is a part of fuse checker. The mechanical input signal is changed to electrical out signal by micro switch.

Note) 19-20 : NO contact, 19-21 : NC contact



Fuse checker / Micro switch

PT(Potential transformer)

2 each of PTs can be mounted on drawout type contactors and fuse combination type.

These are 100VA and 200VA PTs rated 3.6/7.2kV.

Rated voltage(V)	Secondary voltage(V)	Class	Burden(Var)	Frequency(Hz)
3300/6600	110/220	1	100/200	50/60



PT(Potential transformer)

Fuse clip

It is used to install or uninstall a fuse link to the holder. Its dimensions depend on ratings.


Note) Refer to fuse selection table on page 11.



Fuse clip

Auxiliary switch

Auxiliary switches are 2NO+2NC as standard and additional 3NO+3NC can be added on request.



Auxiliary switch

Position switch

This enables checking contactor positions when draw-in and draw-out. Remote checking is also possible through signaling via micro switches in each position.


For standard draw-out types (D, G)

■ When draw-in a contactor into a cradle.


1. Check that the contactor is in the state of open (TEST Position).
2. While pushing the Interlock push button, insert the contactor about 50mm into the cradle.
3. Release the Interlock push button and push the contactor into the cradle by the RUN position.

■ When draw-out a contactor from a cradle.

1. Check that the contactor is in the state of open (RUN Position).
2. While pushing the Interlock push button, draw the contactor about 50mm out of the cradle.
3. Release the Interlock push button and pull the contactor from the cradle by the TEST position.

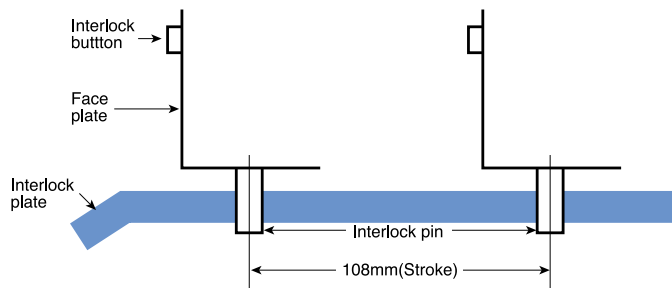

Details of TEST/RUN Position

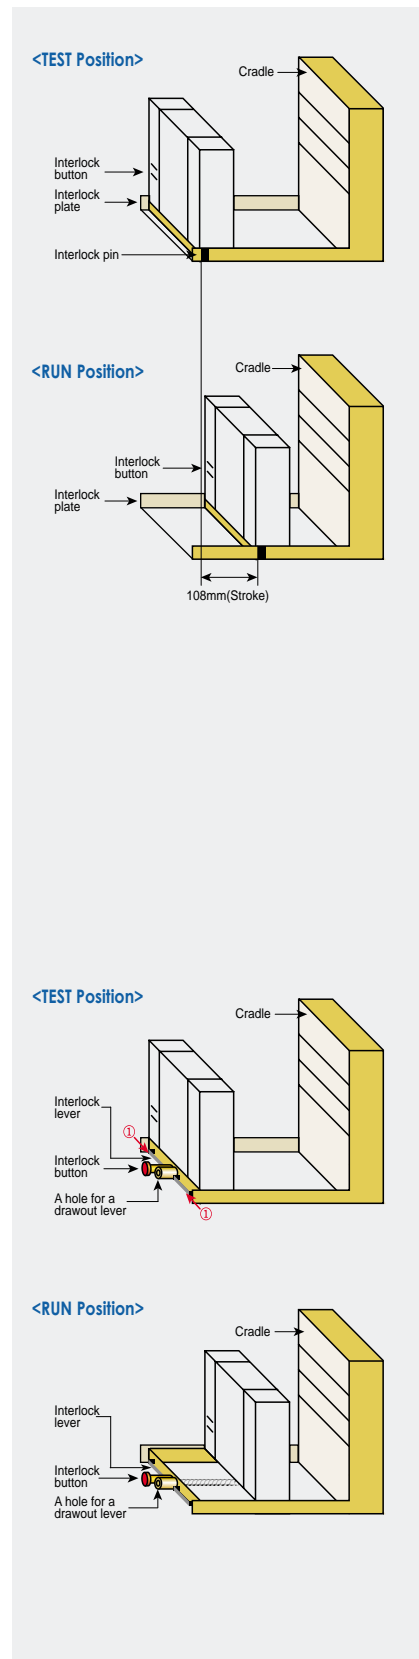

For direct draw-out types (DB, GB)

■ When draw-in a contactor into a cradle.

1. Check that the contactor is in the state of open (TEST Position).
2. While pushing the both sides of Interlock handle to the direction of the arrows, insert the contactor about 50mm into the cradle.
3. Insert the drawout lever into a hole as shown in the fig. While pushing the Interlock push button, swing the lever clockwise two times and release the Interlock push button.
4. Turning the lever clockwise until the contactor reaches in the RUN position.

■ When draw-out a contactor from a cradle.

1. Check that the contactor is in the state of open (RUN Position).
2. Insert the drawout lever into a hole as shown in the fig. While pushing the Interlock push button, swing the lever counterclockwise two times and release the Interlock push button.
4. Turning the lever counterclockwise until the contactor reaches in the TEST position.
5. In case of separating the contactor from the cradle pull the contactor while pushing the both sides of Interlock handle to the direction of the arrows as shown in the fig.


Note) Check the power before connecting or disconnecting.

Electrical circuit diagram

Fixed type (Continuous excitation)

Continuous excitation


DC control

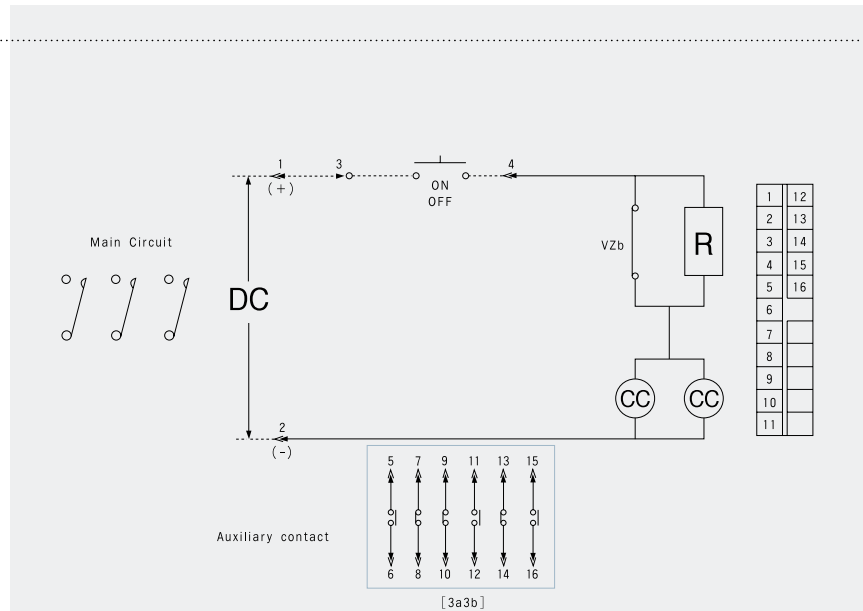

- Impress the power to terminal No.1 and 2.
- ON/OFF operating by using contacts of terminal No.3 and 4.

Note) ----- : User's wiring part

AC control

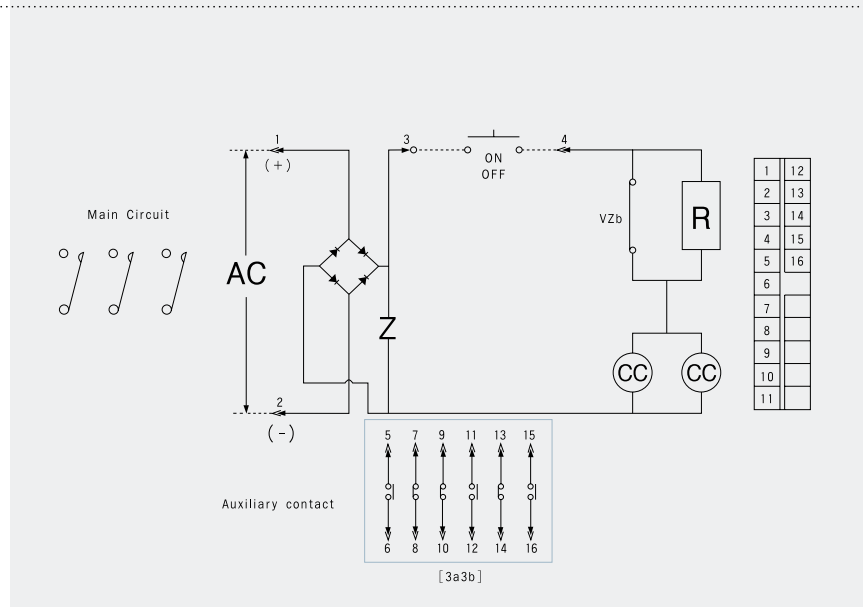


- Impress the power to terminal No.1 and 2.
- ON/OFF operating by using contacts of terminal No.3 and 4.

Note) ----- : User's wiring part


Fixed type (Instantaneous excitation)

Instantaneous excitation

DC control

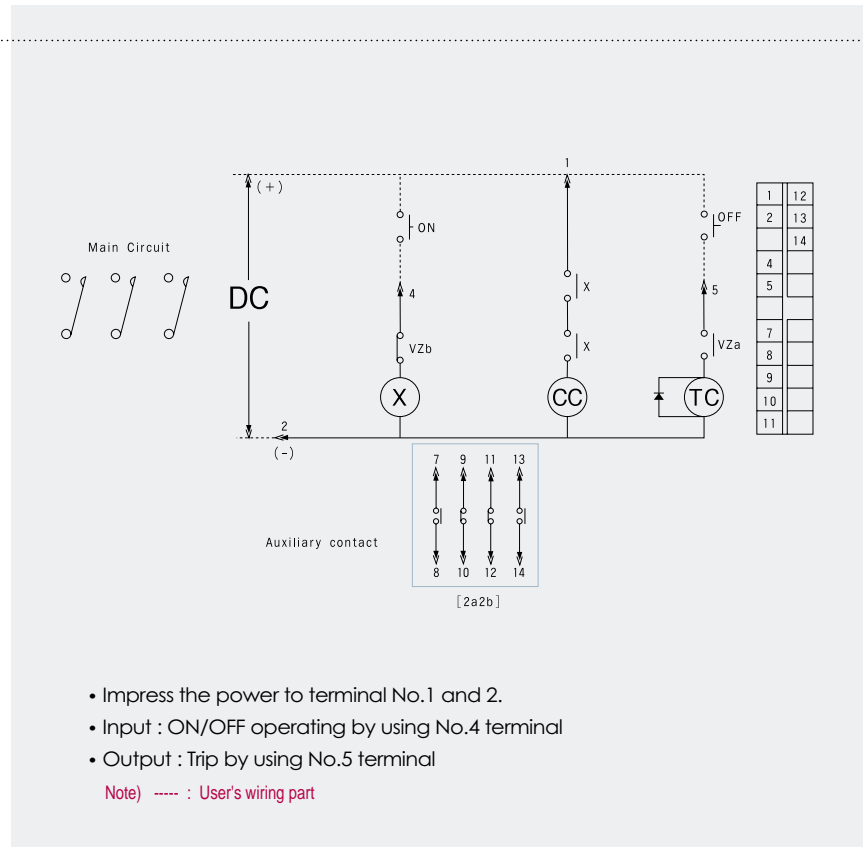

AC control(CTD equipped)

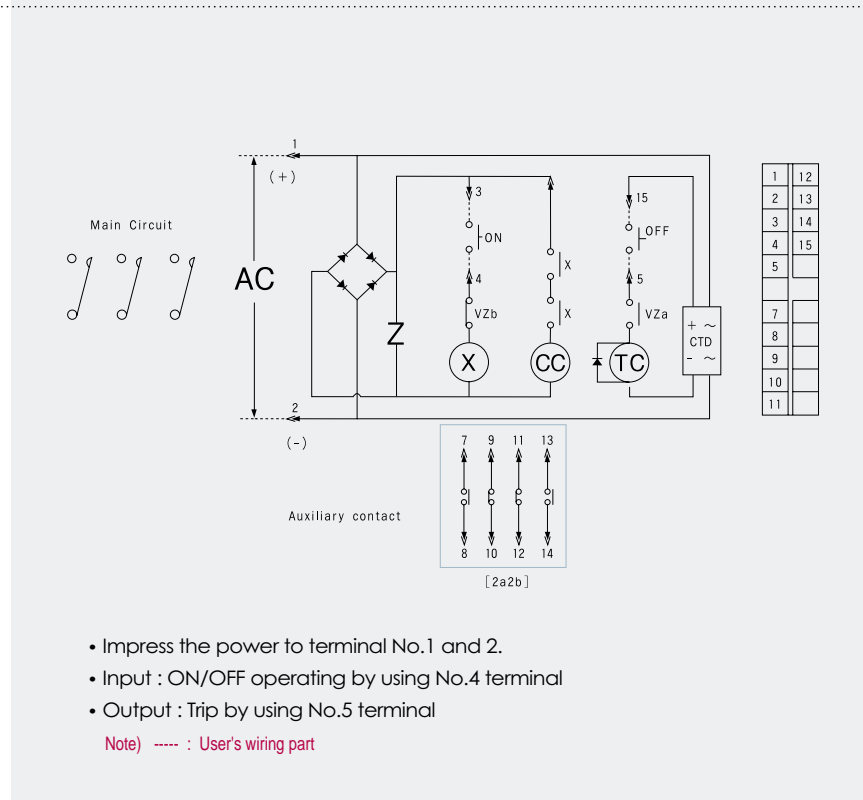


Internal connection diagrams

Drawout type (Continuous excitation)

Continuous excitation


DC control

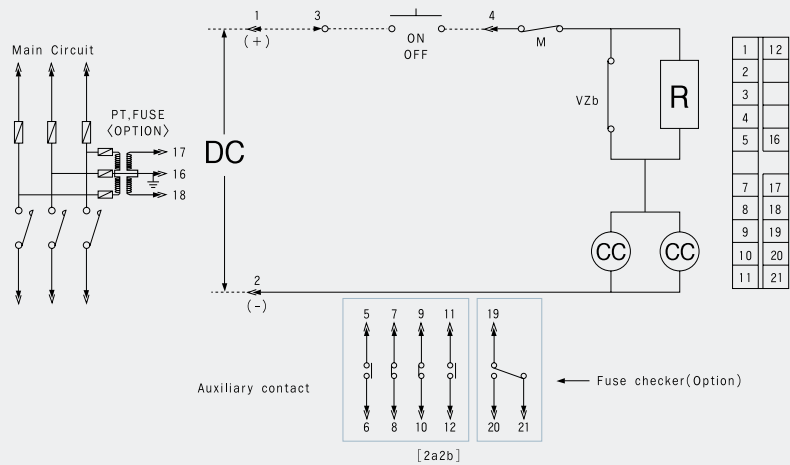

- Impress the power to terminal No.1 and 2.
- ON/OFF operating by using contacts of terminal No.3 and 4.

Note) - - - : User's wiring part

AC control

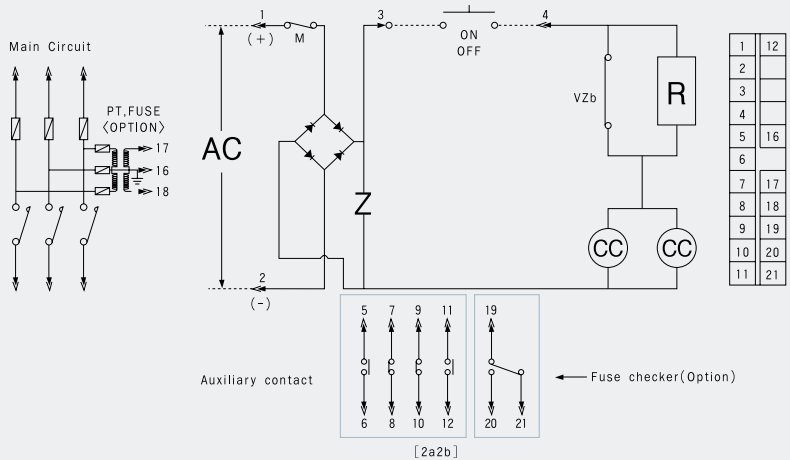


- Impress the power to terminal No.1 and 2.
- ON/OFF operating by using contacts of terminal No.3 and 4.

Note) - - - : User's wiring part

Drawout type (Instantaneous excitation)

Instantaneous excitation


DC control

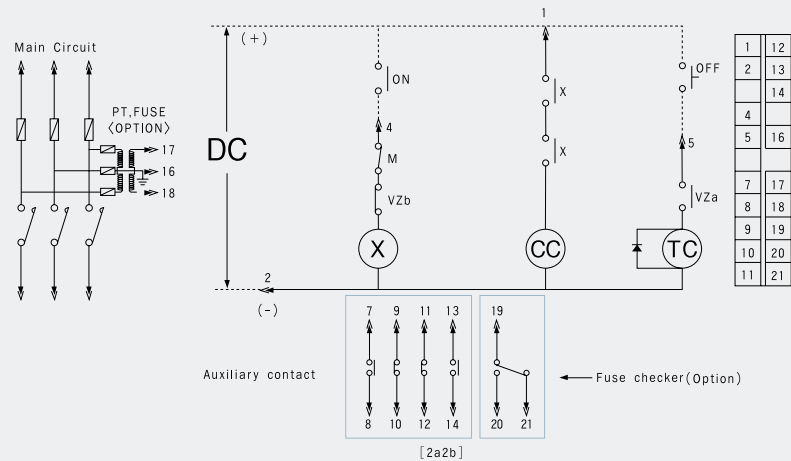

- Impress the power to terminal No.1 and 2.
- Input : ON/OFF operating by using No.4 terminal
- Output : Trip by using No.5 terminal

Note) ----- : User's wiring part

AC control(CTD equipped)

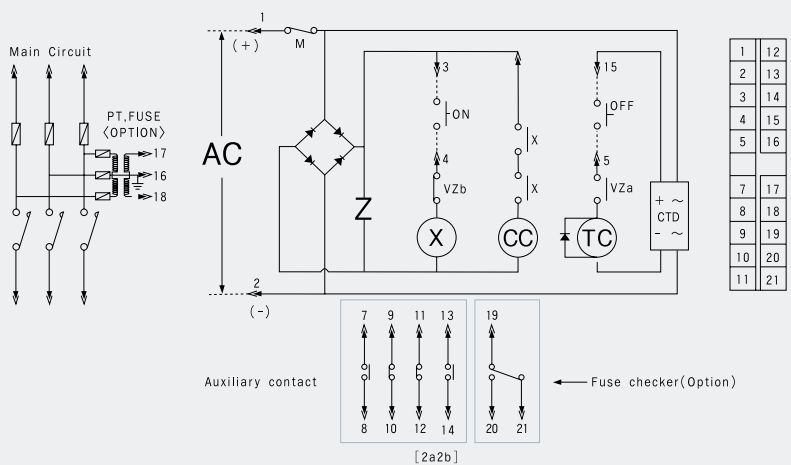



- Impress the power to terminal No.1 and 2.
- Input : ON/OFF operating by using No.4 terminal
- Output : Trip by using No.5 terminal

Note) ----- : User's wiring part

External dimensions


Fixed type

LVC-3/6Z-42/44E(L)D

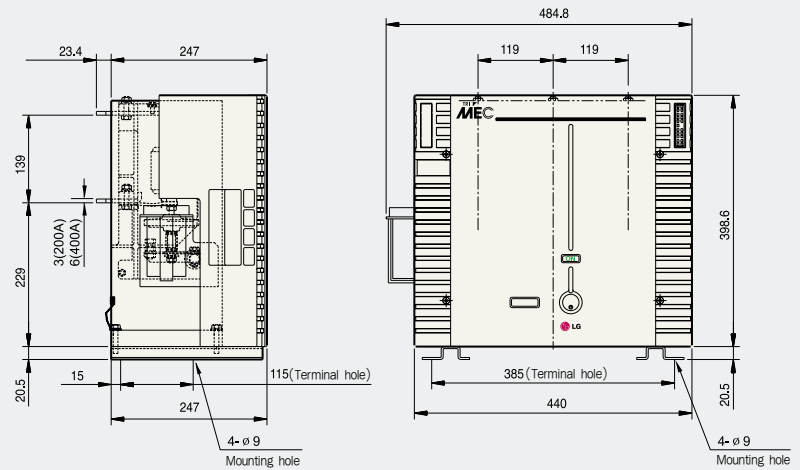


Drawout type w/o a cradle

LVC-3/6D-42/44E(L)D

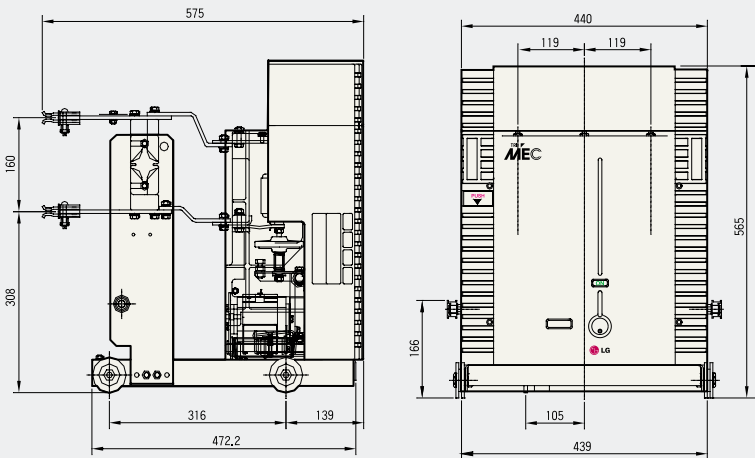



Combination drawout type w/o a cradle (Fused combination)

LVC-3/6G-42/44E(L)D


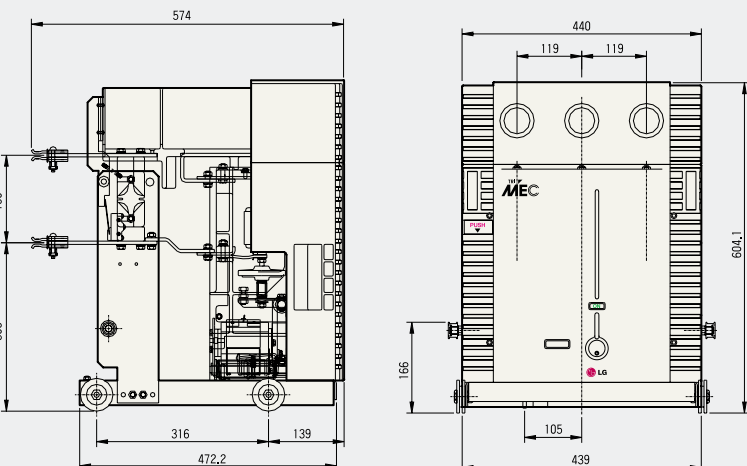


Drawout type



E-Class Cradle

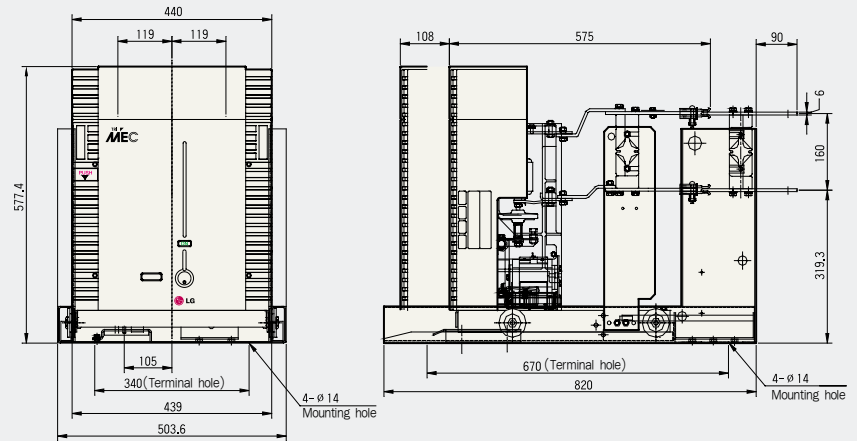

F₂-Class Cradle

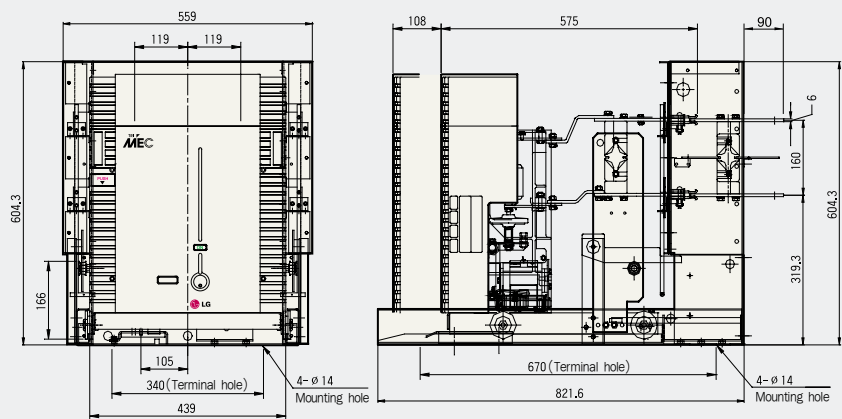



G-Class Cradle

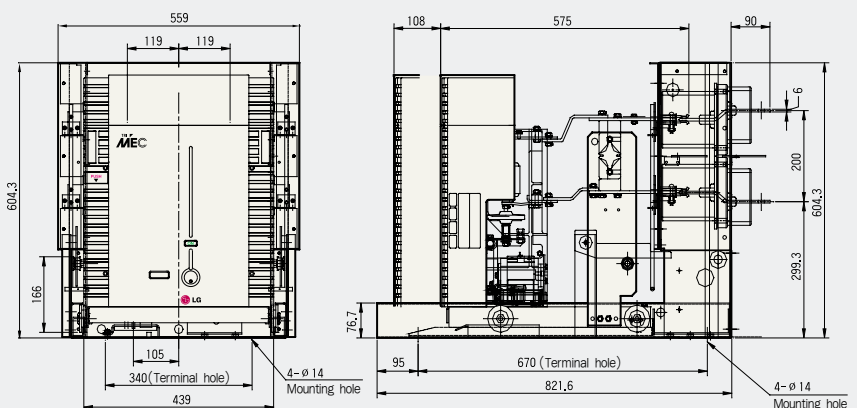


External dimensions

Combination drawout type (Fused combination) E-Class Cradle


(Unit : mm)

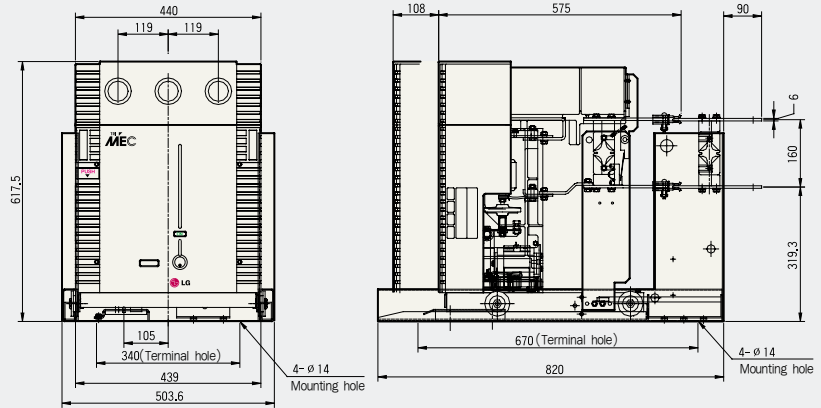



F₂-Class Cradle

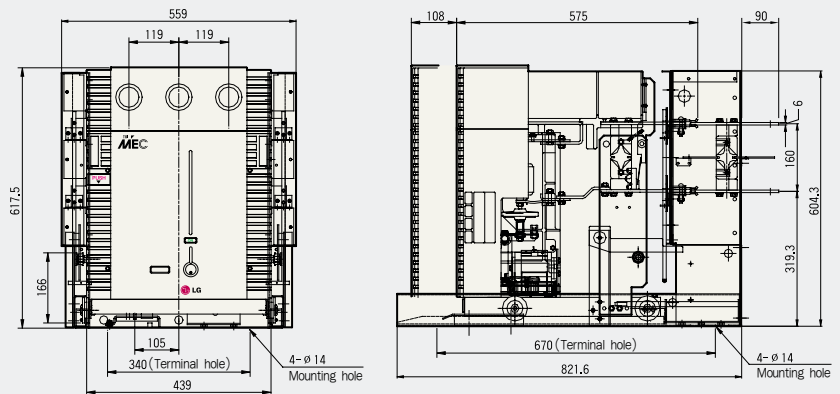


G-Class Cradle


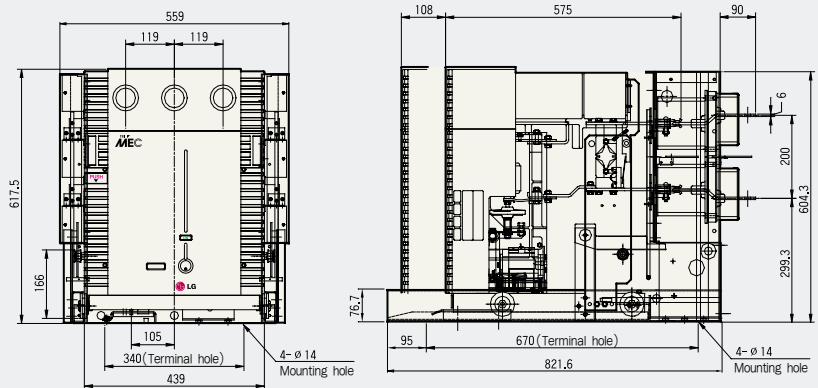


Direct-drawout type
(For MCSG)
B-Class Cradle

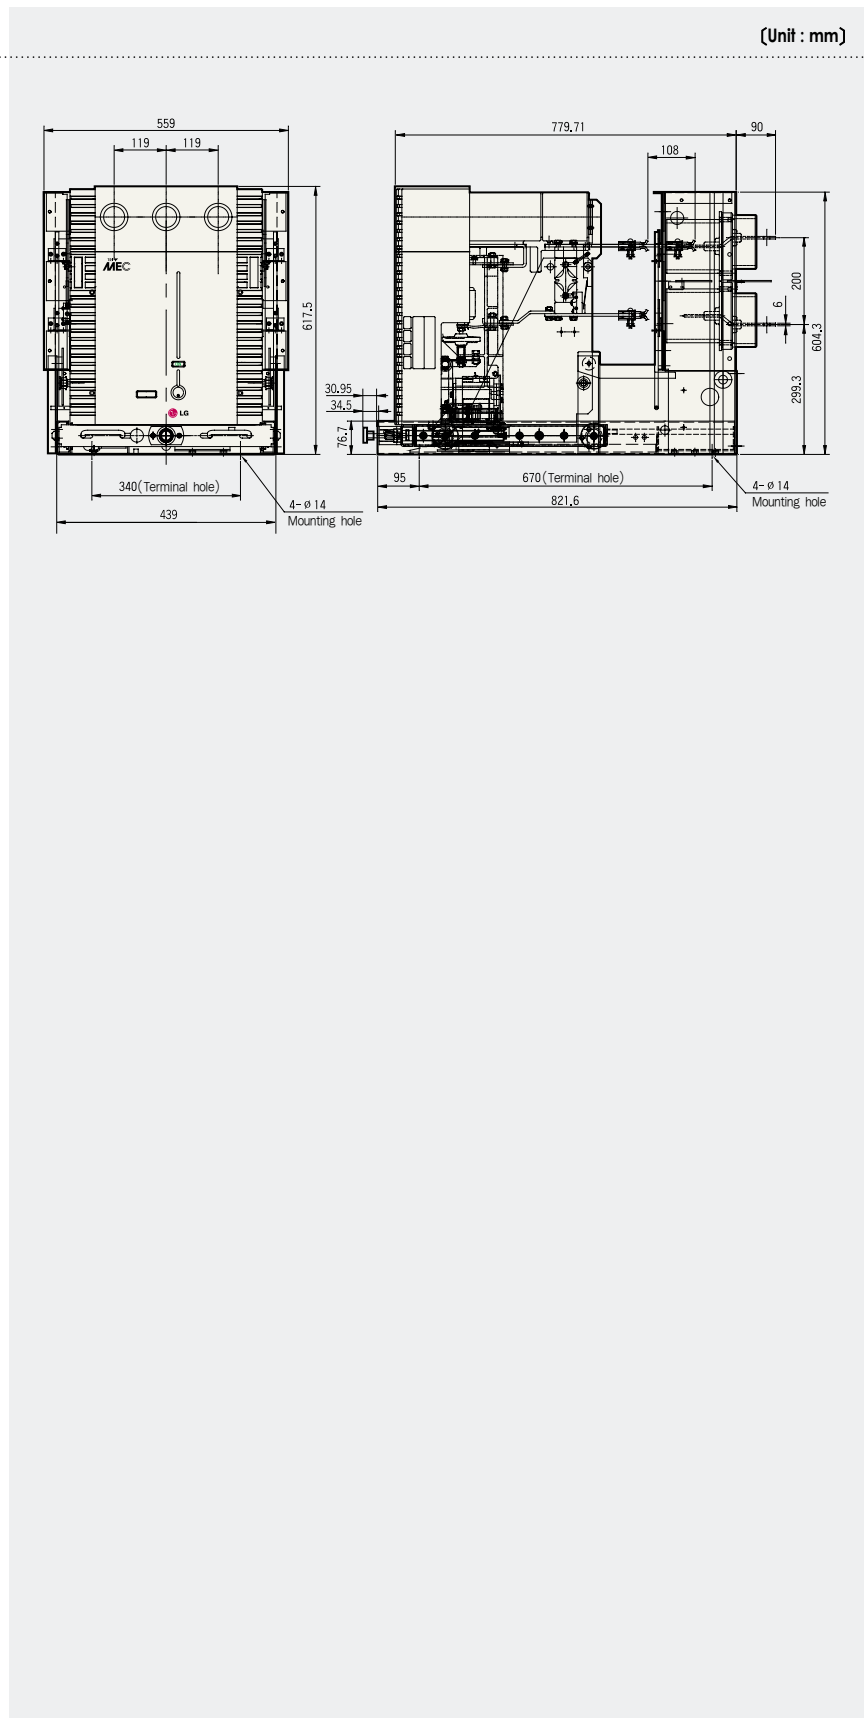

Selection tables

DIN type	Application Model		Fuse link				Fuse selection by load				
			Rated voltage (kV)	Rated current (A)	Rated interrupting current (kA)	Lowest interrupting current (kA)	Transformer load(kVA)		Capacitive load(kVA)		
							Single phase	Three phase	Three phase		
	LFL - 3/6G - 5B	5	40	4	4	4 ~ 8 * (8 ~ 16)	6.7 ~ 14 * (13 ~ 28)	9.8up to * (9.8up to)			
	LFL - 3/6G - 10B	10				6 ~ 13 (13 ~ 25)	11 ~ 22 (21 ~ 44)	9.8 ~ 12 (19 ~ 24)			
	LFL - 3/6G - 20B	20				15 ~ 31 (30 ~ 62)	25 ~ 53 (51 ~ 107)	12 ~ 31 (24 ~ 61)			
	LFL - 3/6G - 30B	30				21 ~ 42 (40 ~ 84)	35 ~ 73 (70 ~ 145)	31 ~ 46 (61 ~ 92)			
	LFL - 3/6G - 40B	40				40 ~ 82 (80 ~ 165)	69 ~ 143 (137 ~ 286)	46 ~ 64 (92 ~ 128)			
	LFL - 3/6G - 50B	50				49 ~ 102 (98 ~ 204)	85 ~ 117 (170 ~ 354)	64 ~ 81 (128 ~ 163)			
	LFL - 3/6G - 60B	63				66 ~ 137 (132 ~ 275)	114 ~ 238 (229 ~ 476)	181 ~ 105 (163 ~ 210)			
	LFL - 3/6G - 75B	75				68 ~ 165 (134 ~ 330)	117 ~ 285 (233 ~ 571)	105 ~ 150 (210 ~ 300)			
	LFL - 3/6G - 100B	100				128 ~ 220 (256 ~ 440)	222 ~ 381 (443 ~ 762)	150 ~ 222 (300 ~ 445)			
	LFL - 3/6G - 125B	125				151 ~ 275 (302 ~ 550)	261 ~ 476 (522 ~ 952)	222 ~ 275 (445 ~ 550)			
	LFL - 3G - 160B	160				211 ~ 352 (-)	365 ~ 610 (-)	275 ~ 370 (-)			
	LFL - 3G - 200B	200				265 ~ 440 (-)	495 ~ 762 (-)	370 ~ 550 (-)			
	LFL - 6G - 160B	160				-	(425 ~ 704)	-	(735~1,220)	-	(550~742)
	LFL - 6G - 200B	200				-	(437 ~ 880)	-	* (755~1,520)	-	(742~1,000)
	LFL - 20G - 5B	5				20 ~ 43	36 ~ 75	46up to			
	LFL - 20G - 10B	10				43 ~ 90	75 ~ 157	46 ~ 83			
	LFL - 20G - 20B	20				99 ~ 206	172 ~ 358	83 ~ 203			
	LFL - 20G - 30B	30				149 ~ 310	258 ~ 538	203 ~ 317			
	LFL - 20G - 40B	40				267 ~ 557	464 ~ 965	317 ~ 425			
	LFL - 20G - 50B	50				345 ~ 719	598 ~ 1,246	425 ~ 564			
	LFL - 20G - 60B	60				430 ~ 897	745 ~ 1,554	564 ~ 710			
	LFL - 20G - 75C	75				580 ~ 1,145	1,000 ~ 1,983	710 ~ 1,021			
	LFL - 20G - 100C	100				923 ~ 1,527	1,600 ~ 2,645	1,021 ~ 1,655			
	LFL - 20G - 125B	125				1,364 ~ 1,908	2,362 ~ 3,304	1,655 ~ 2,370			
LFL - 20G - 160B	160	2,125 ~ 2,443	3,680 ~ 4,232	2,370 ~ 3,170							
LFL - 20G - 200B	200	2,650 ~ 3,050	4,593 ~ 5,287	3,170 ~ 4,000							

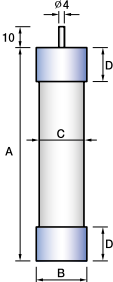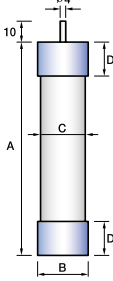KS type	Application Model		Fuse link				Fuse selection by load				
			Rated voltage (kV)	Rated current (A)	Rated interrupting current (kA)	Lowest interrupting current (kA)	Transformer load(kVA)		Capacitive load(kVA)		
							Single phase	Three phase	Three phase		
G(General use) type 	LFL - 3/6G - 5	5	40	5	5	-	* (5up to)	5up to * (15up to)	-	* (-)	
	LFL - 3/6G - 10	10				10up to (15up to)	15up to (30up to)	10up to (25up to)			
	LFL - 3/6G - 20	20				20up to (50up to)	30up to (75up to)	30up to (50up to)			
	LFL - 3/6G - 30	30				30up to (75up to)	75up to (150up to)	50up to (100up to)			
	LFL - 3/6G - 40	40				50up to (100up to)	100up to (200up to)	75up to (150up to)			
	LFL - 3/6G - 50	50				75up to (150up to)	150up to (300up to)	100up to (200up to)			
	LFL - 3/6G - 60	63				-	(-)	-	(-)		
	LFL - 3/6G - 75	75				150up to (200up to)	200up to (400up to)	200up to (400up to)			
	LFL - 3/6G - 100	100				200up to (400up to)	375up to (750up to)	300up to (600up to)			
	LFL - 3G - 150	150				300up to (-)	500up to (-)	400up to (-)			
	LFL - 3G - 200	200				400up to (-)	750up to (-)	600up to (-)			
	LFL - 3G - 300	300				625up to (-)	1,000up to (-)	1,000up to (-)			
	LFL - 3G - 400	400				750up to (-)	1,500up to (-)	-	(-)		
	LFL - 6G - 150	150				-	(500up to)	-	(1,000up to)	-	(800up to)
	LFL - 6G - 200	200				-	(750up to)	-	(1,500up to)	-	(1,200up to)
	LFL - 6G - 300	300				-	(1,250up to)	-	(2,000up to)	-	(-)
	LFL - 6G - 400	400				-	(-)	-	(2,500up to)	-	(-)
	M(Motor protection) type 	LFL - 3M - 20				20	40	7	7	-	-
LFL - 3M - 50		50	-	150up to (-)							
LFL - 3M - 100		100	-	300up to (-)							
LFL - 3M - 150		150	-	400up to (-)							
LFL - 3M - 200		200	-	800up to (-)							
LFL - 3M - 300		300	-	1,000up to (-)							
LFL - 3M - 400		400	-	-	(-)						
LFL - 6M - 20		20	-	-	(100up to)						
LFL - 6M - 50		50	-	-	(300up to)						
LFL - 6M - 100		100	-	-	(600up to)						
LFL - 6M - 150		150	-	-	(800up to)						
LFL - 6M - 200		200	-	-	(-)						
LFL - 6M - 300		300	-	-	(-)						
LFL - 6M - 400		400	-	-	(-)						

Fuse selection by load	Dimensions(mm)				Applicable holder
	A	B	C	D	
Motor load(kVA)					
Three phase					
6.5 ~ 10.7 * (13 ~ 22)	195	55	-	-	LFH-6G-D1HB
10.7 ~ 28 (22 ~ 36)					
28 ~ 57 (36 ~ 86)					
50 ~ 85 (86 ~ 117)					
85 ~ 115 (117 ~ 230)					
115 ~ 142 (230 ~ 284)	192	77	-	-	LFH-6G-D1HB
138 ~ 191 (276 ~ 382)					
181 ~ 252 (362 ~ 503)					
253 ~ 369 (469 ~ 739)					
293 ~ 435 (556 ~ 870)					
343 ~ 572 (-)	292	77	-	-	LFH-6G-D2HB
375 ~ 630 (-)					
- (751 ~ 1,223)					
- (1,154 ~ 1,760)					
-					
-	442	55	-	-	LFH-20G-D2HB
-					
-					
-					
-					
-	442	77	-	-	LFH-20G-D2HB
-					
-					
-					
-					
-	442	87	-	-	LFH-20G-D2HB
-					
-					
-					
-					

Fuse selection by load	Dimensions(mm)				Applicable holder
	A	B	C	D	
Motor load(kVA)					
Three phase					
-	261	50	47	25	LFH-6G-D60
-					
-					
-					
-					
-	311	60	57	30	LFH-6G-D1H
-					
-					
-					
-					
-	311	77	73	43	LFH-6G-D2H
-					
-					
-					
-					
-	350	110	108	55	LFH-6G-D4H
-					
-					
-					
-					
37 ~ 10.7 * (-)	200	60	58	30	LFH-3M-100
90 ~ 28 (-)					
220 ~ 57 (-)					
450 ~ 85 (-)					
710 ~ 115 (-)					
900 ~ 142 (-)	200	77	73	43	LFH-3M-200
1,500 (-)					
- (75 ~ 160)					
- (185 ~ 400)					
- (450 ~ 800)					
- (900 ~ 1,250)	250	87	84	50	LFH-3M-400
- (1,500)					
- (2,500)					
- (3,000)					
-					
-	311	60	58	30	LFH-6M-50
-					
-					
-					
-					
-	350	77	73	43	LFH-6M-200
-					
-					
-					
-					
-	450	87	84	50	LFH-6M-400
-					
-					
-					
-					

Selecting conditions and warning

- * The values in () apply to the loads of 7.2kV.
- It is assumed that the inrush current of a transformer is 10 times of the full load current of a motor for 0.1 second.
 - The rated current of a fuse is selected to carry continuously the current of 1.5 times of rated current of a transformer. (1.3 times in the case of *)
 - In the transformer load table it is assumed that the interruption will be made at 25 times of rated current within 2 seconds.
- It is assumed that the inrush current of a motor is 5 times of full load current for 10 seconds.
- In the case of using the M(motor protection) type fuses for the purpose of the short-circuit protection of a motor or a starter select the proper rating in addition refer to the characteristic curves on the catalog to make the device protected from overload by a circuit breaker or a contactor.
- It is assumed that the inrush current of a capacitor is 71 times of its rated current for 0.002 second.
 - The rated current of a fuse is selected to carry continuously the current of 1.43 times of rated current of a capacitor.
 - In case service life of more than 1000 operations is required select in the M(motor protection) type fuse table.
- The above mentioned comments are according to KS(Korean Industrial Standard) and subject to the real situation.



KS-Type fuse

Power fuse

Power fuse

LG Prime-MEC power fuses are designed to protect equipments from fault current such as short-circuit, and generally used for the protection the circuits of transformers, capacitors and motors they protect.

For further safety and reliability the elements inside of fuses are made of silver, and high quality quartzs and and ceramic are used for magnetic rods and tubes, respectively.

LG medium voltage vacuum contactors using LG vacuum interrupters manufactured with worldclass technology are type tested in LG PT & T that is accredited high power test lab by worldclass KOLAS. To ensure the performance they, installed in a vacuum contactor, are tested according to IEC 60282-1 in LG PT & T that is accredited high power test lab by worldclass KOLAS.

Considerations in application


- Power fuses are suitable for the protection from a short-circuit, Overload current will not protected.
- Reset or re-use after blowing is not possible. Fuse reset or re-use is not possible after fused are blown out.
- When the fuses are selected, the inrush currents arising from the starting transformers, motors, capacitors should be considered.
- When the fuses are selected, their usage and circuit requirements should be considered.
- For the purpose of protection from the fault current below the lowest interrupting current of the fuse it is desirable to replace it with a fuse having lower interrupting rate or add other overcurrent relay in series
- Withstand voltage of the circuit should be higher than that of a fuse that protects it.
- If possible, select the fuse whose rated current is much higher than the load current. The rated current not sufficiently exceeding the normal current of the load may cause reduction in the service life.
- Replace all three fuses in case of blowing in a fuse.

Determination of the rated current

The rated current of the fuse must be selected properly after examination of the current/time characteristics of fuses, equipments and the related circuit conditions.


General considerations

- When the fuses are selected the sufficient rated current should be considered to avoid the deterioration of the fuse element due to sustained load current in the long term.
- The fuse rated current should be higher than the sum of all load currents.
- The estimated overload current should be within the fuse's time/current characteristics. The estimated overload current should not exceed the allowable overload withstand currents of the equipment and the number of its events should not exceed 100 times.
- The characteristic curve of a fuse must lie to the right of those of other equipments to be protected.
- The withstand strength such as permissible let-through current, I^2t of the equipments to be protected must be higher than that of a fuse.
- Coordination of permissible time limit
Protection equipments in the line side < Fuses < Protection equipments in the load side
- Coordination when fuses are used as back-up protection
Permissible let-through current of a fuse < That of a protection equipment
- Use the same rating for all three phases even the differential current between phases exists.

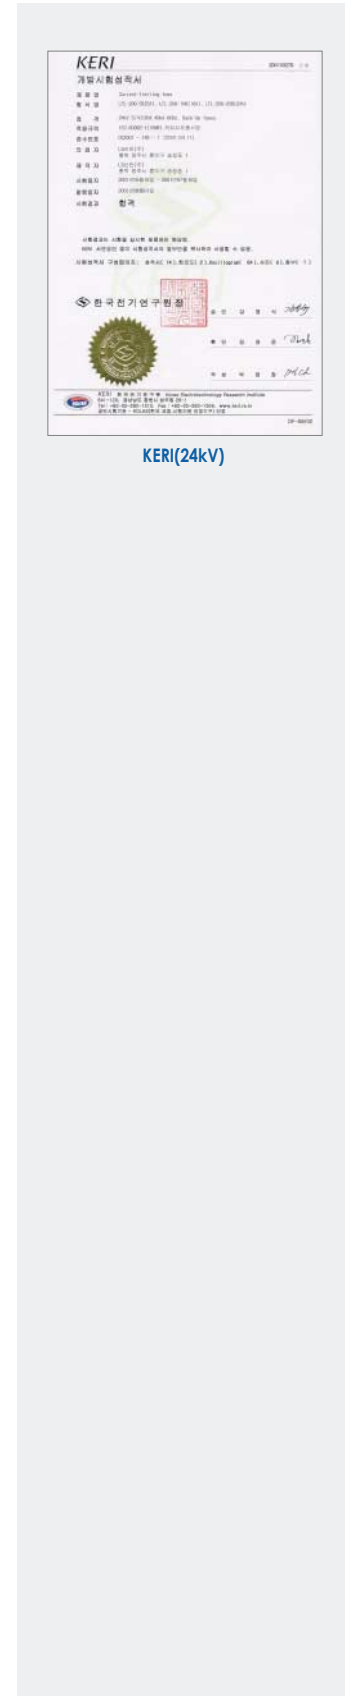


Coordination graph

Coordination between fuse and transformer circuit



- ① Full load current of a transformer
- ② The lowest interrupting current of the secondary circuit breaker
- ③ Permissible overload current of a transformer
- ④ Rated current of a fuse
- ⑤ Lowest blow-out current of a fuse
- ⑥ Lowest interrupting current of a fuse
- ⑦ Inrush current at no load of a transformer
- ⑧ Secondary short-circuit current
- ⑨ Rated interrupting current of a secondary circuit breaker
- ⑩ Primary short-circuit current
- ⑪ Rated interrupting current of a fuse

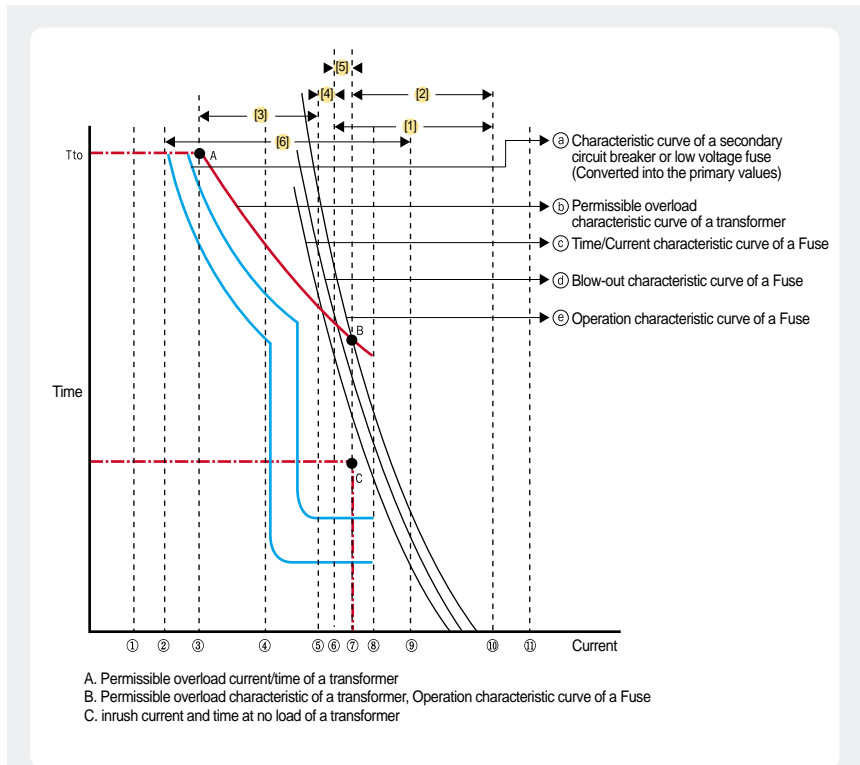

※ Coordination in the graph

- **Zone of [1]** : Protection of primary side from short-circuit by a fuse
- **Zone of [2]** : Protection of a transformer
- **Zone of [3]** : Out of the scope of fuse operation
- **Zone of [4]** : Interruption is not ensured even though the fuse blows.
- **Zone of [5]** : Protection of a transformer is not ensured even though the fuse interrupts the circuit.
- **Zone of [3]+[4]+[5]** : No protection zone of a transformer
Circuit breaker or low voltage fuse required for the transformer protection

When any protection device is not installed in the secondary of a transformer

- Permissible overload current of a transformer (point ③)) must lie to the left of the curve c(time/current characteristic curve of a Fuse)
- Full load current of a transformer ① ≤ Rated current of a fuse ④
- Point C (inrush current and time at no load of a transformer) must lie to the left of the point c(time/current characteristic curve of a Fuse)
- Secondary short-circuit current ⑧ > Lowest interrupting current of a fuse ⑥
- Point B must lie to the left of the secondary short-circuit current ⑧.
- Primary short-circuit current ⑩ < Rated interrupting current of a fuse ⑪

When a circuit breaker or fuse is installed in the secondary of a transformer

- Must meet the requirements above mentioned in ①
- The characteristic curve of a secondary circuit breaker or low voltage fuse (a) must lie to the left of permissible overload characteristic curve of a transformer (b) and under the point B
- The characteristic curve of a secondary circuit breaker or low voltage fuse (a) must lie to the Time/Current characteristic curve of a Fuse and under the Secondary short-circuit current (⑧).
- Secondary short-circuit current (⑧) < Characteristic curve of a secondary circuit breaker or low voltage fuse (a)
- The secondary circuit breaker or low voltage fuse should meet the above mentioned requirements to each branch circuit.
- Another medium voltage protection device is required for the ensured protection against the fault happening between the secondary protection devices and the internal short-circuit of a transformer in the zone of [3]+[4]+[5].

Considerations by the type of load

1. Power fuses for transformer loads

- The fuse with sufficient rated current must be selected to avoid the deterioration of the fuse element due to permissible overload in the long term.
 - The fuse's current/time characteristic should cover the inrush current/time of the transformer.
 - In case of power transformers the symmetrical inrush current must be within 10 times of the fuse rating and the fuse should withstand at least 0.1 second under the condition.
 - Fuse rated current \geq Transformer rated current
 - The lowest interrupting current of the fuse $<$ Short circuit current in the primary of the fuse
 - In case of protection of two or more transformers
 - Fuse rating should be selected on the basis of the phase condition where maximum current flows.
 - In the event of short-circuit in the secondary of the transformer
The lowest interrupting current of the fuse $<$ Short circuit current in the primary of the transformer
 - In case of potential transformers
 - When the fuses are selected do not consider the short-circuit happening in the secondary of the PT, but protecting PT itself and the circuit against the fault in the primary side.
 - Select the fuse with higher rated current than the load current so as not to be damaged by overcurrent.
 - The characteristic curve of a fuse must lie to the right of those of other equipments to be protected.
 - The withstand strength such as permissible let-through current, I^2t of the equipments to be protected must be higher than that of a fuse.
- Note) Refer to the general considerations other than the above mentioned.*

2. Power fuses for motor loads

- The fuse with sufficient rated current must be selected to avoid the deterioration of the fuse element due to permissible overload in the long term.
 - The fuse's current/time characteristic should cover the inrush current/time of the motor.
 - The inrush current of the motor must be within 5 times of the fuse rating and the fuse should withstand at least 10 seconds under the condition.
 - Fuse rated current \geq Motor full load current
- Note) Refer to the general considerations other than the above mentioned.*

3. Power fuses for combination with vacuum contactors

- The current at the intersection between a fuse characteristic curve and a contactor operation curve should be greater than the lowest interrupting current of a fuse.
 - And the current at the cross point between a fuse curve and a contactor minimum dropout curve should not be greater than the rated interrupting current of a contactor.
- Note) Refer to the general considerations other than the above mentioned.*

4. Power fuses for capacitor loads

- The fuse with sufficient rated current must be selected to avoid the deterioration of the fuse element due to permissible overload in the long term.
 - The fuse's current/time characteristic should cover the inrush current/time of the capacitor.
 - The size of inrush current depends on whether or not the serial reactors and parallel capacitors exist.
 - The inrush current of the capacitor must be within 70 times of the fuse rating and the fuse should withstand at least 0.002 second under the condition.
 - Fuse rated current \geq Capacitor rated current
 - In the case of serial reactor(6%) connected the inrush current must be within 5 times of the fuse rating and the fuse should withstand at least 0.1 second under the condition
- Note) Refer to the general considerations other than the above mentioned.*




Power fuses for transformer loads




Power fuses for motor loads

Coordination between fuse and motor circuit



- ① Full load current of a motor
- ② Rated current of a fuse
- ③ Inrush current of a motor (Locked rotor current)
- ④ Lowest interrupting current of a fuse
- ⑤ Rated interrupting current of a vacuum contactor
- ⑥ Short-circuit current
- ⑦ Rated interrupting current of a fuse

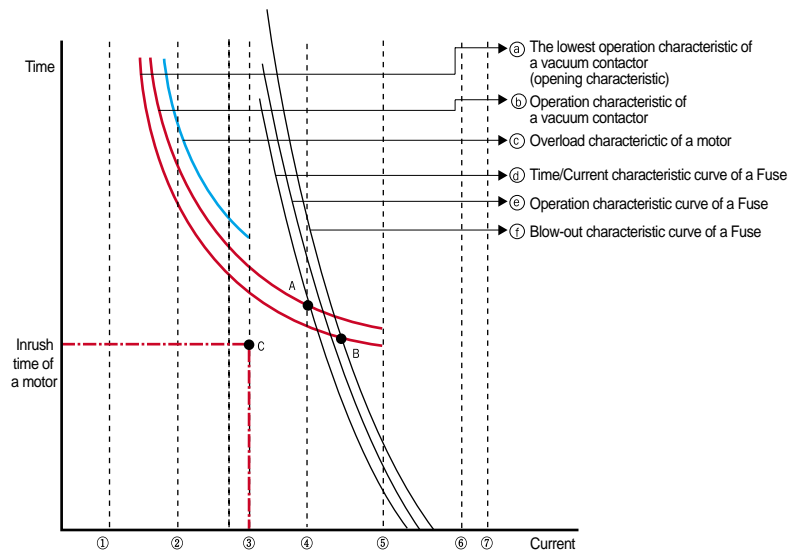

A : (Operation characteristic of a vacuum contactor, Time/Current characteristic curve of a Fuse)
 B : (The lowest operation characteristic of a vacuum contactor, Operation characteristic curve of a Fuse)
 C : (Inrush current of a motor, Inrush time of a motor)


- Full load current of a motor① \leq Rated current of a fuse②
- Short-circuit current(6) < Rated interrupting current of a fuse⑦
- Inrush current of a motor (Locked rotor current)③ < Rated interrupting current of a vacuum contactor⑤
- Point C must lie to the left of a(The lowest operation characteristic of a vacuum contactor)and d(Time/Current characteristic curve of a Fuse)
- Operation characteristic of a vacuum contactor(b) must lie to the left of c(Overload characteristic of a motor)
- Point A must lie to the right of ④ Lowest interrupting current of a fuse.
- Point B must lie to the left of ⑤ Rated interrupting current of a vacuum contactor.

Note) The current less than point A can be protected by a vacuum contactor, and the current greater than point B is to be protected by a fuse.


Operation curves

DIN Type


3.6/7.2kV blowing characteristic

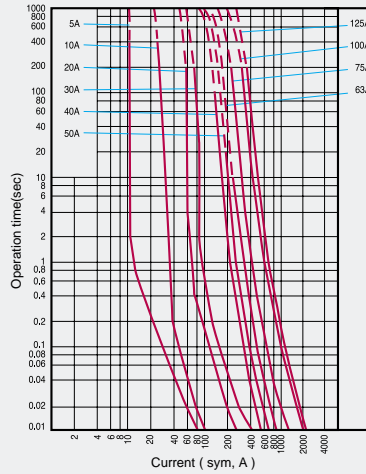


3.6/7.2kV current limiting characteristic

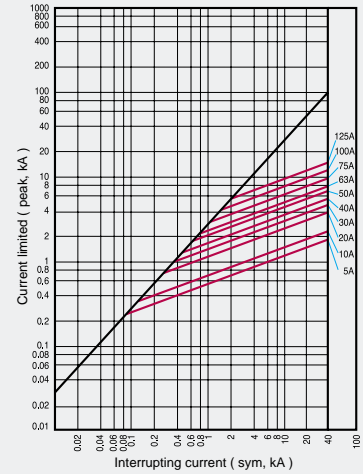


3.6kV blowing characteristic

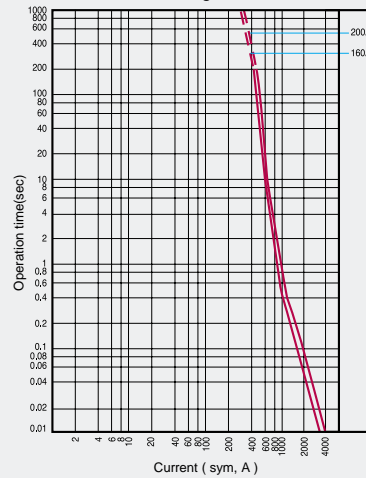


3.6kV current limiting characteristic

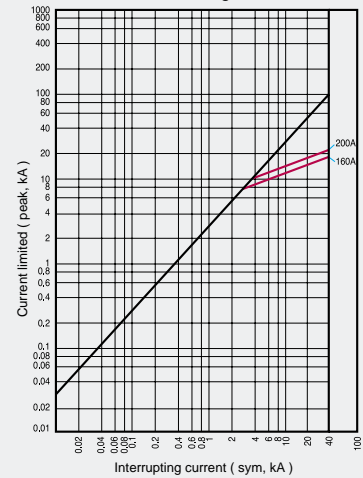

7.2kV blowing characteristic

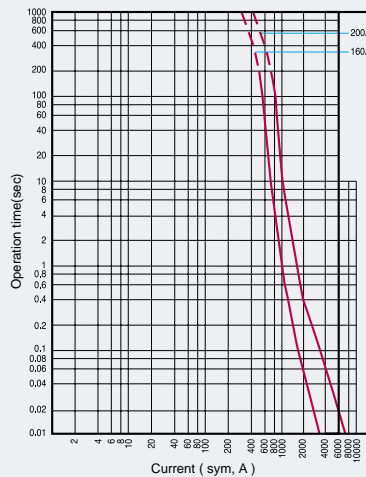


7.2kV current limiting characteristic

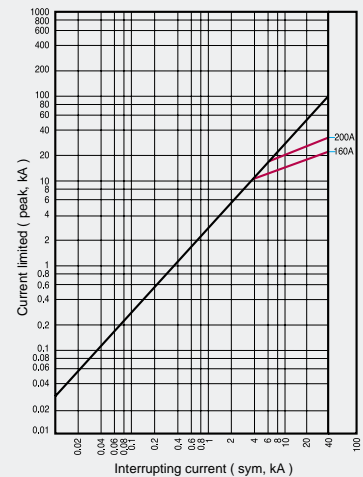


KS Type

G(General use) type fuse

3.6/7.2kV blowing characteristic

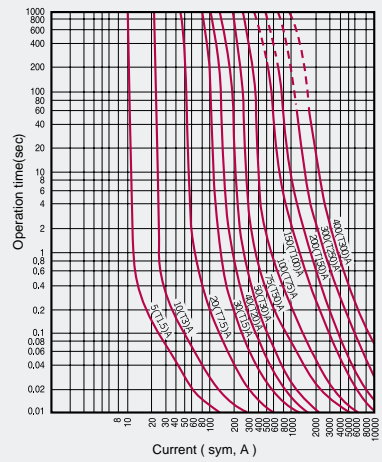


3.6/7.2kV current limiting characteristic

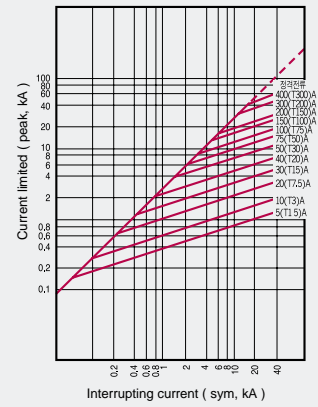


M(Motor protection) type fuse

3.6kV blowing characteristic

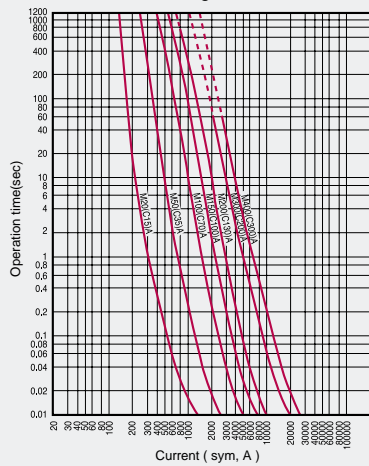

7.2kV blowing characteristic

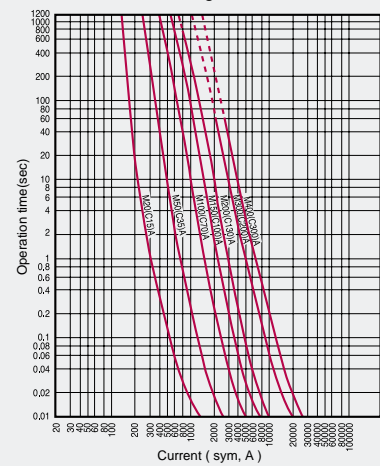

3.6kV, 7.2kV current limiting characteristic

