

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see

- www.siemens.com/product?3RU2
- www.siemens.com/product?3RB3
- www.siemens.com/product?3RB2

TIA Selection Tool Cloud (TST Cloud), see
<https://mall.industry.siemens.com/spice/TSTWeb?kmat=ElectronicOverloadRelay>

Configuration Manual "Load feeders – Configuring the SIRIUS Modular System – Selection data for Fuseless and Fused Load Feeders", see
<https://support.industry.siemens.com/cs/ww/en/view/39714188>



Features

3RU21

3RB30/3RB31

3RB20/3RB21

3RB22/3RB23

3RB24

Benefits

General data

Sizes	S00 ... S3	S00 ... S3	S6 ... S12	S00 ... S12	S00 ... S12	<ul style="list-style-type: none">• Are coordinated with the dimensions, connections and technical characteristics of the other devices in the SIRIUS modular system (contactors, etc.)• Permit the mounting of slim and compact load feeders in widths of 45 mm (S00, S0), 55 mm (S2), 70 mm (S3), 120 mm (S6) and 145 mm (S10/S12); this does not include the current measuring modules for the 3RB22 to 3RB24 evaluation modules sizes S00 to S3• Simplify configuration
Seamless current range	0.11 ... 100 A	0.1 ... 115 A	50 ... 630 A	0.3 ... 630 A (up to 820 A) ¹⁾	0.3 ... 630 A (up to 820 A) ¹⁾	<ul style="list-style-type: none">• Allows easy and consistent configuration with one series of overload relays (for small to large loads)
Protection functions						
Tripping due to overload	✓	✓	✓	✓	✓	<ul style="list-style-type: none">• Provides optimum inverse-time delayed protection of loads against excessive temperature rises due to overload
Tripping due to phase unbalance	✓	✓	✓	✓	✓	<ul style="list-style-type: none">• Provides optimum inverse-time delayed protection of loads against excessive temperature rises due to phase unbalance
Tripping due to phase failure	✓	✓	✓	✓	✓	<ul style="list-style-type: none">• Minimizes heating of three-phase motors during phase failure
Protection of single-phase loads	✓	--	--	✓	✓	<ul style="list-style-type: none">• Enables the protection of single-phase loads
Tripping in the event of overheating by Integrated thermistor motor protection function	-- ²⁾	-- ²⁾	-- ²⁾	✓	✓	<ul style="list-style-type: none">• Provides optimum temperature-dependent protection of loads against excessive temperature rises, e.g. for stator-critical motors or in the event of insufficient coolant flow, contamination of the motor surface or long starting or braking operations• Eliminates the need for additional special equipment• Saves space in the control cabinet• Reduces wiring outlay and costs
Tripping in the event of a ground fault by Internal ground-fault detection (activatable)	--	✓ (only 3RB31)	✓ (only 3RB21)	✓	✓	<ul style="list-style-type: none">• Provides optimum protection of loads against high-resistance short circuits or ground faults due to moisture, condensed water, damage to the insulation material, etc.• Eliminates the need for additional special equipment• Saves space in the control cabinet• Reduces wiring outlay and costs

✓ Available

-- Not available

¹⁾ Motor currents up to 820 A can be recorded and evaluated by a current measuring module, e.g. 3RB2906-2BG1 (0.3 to 3 A), in combination with a 3UF1868-3GA00 (820 A/1 A) series transformer.
 For 3UF18 transformers, see page 10/24.

²⁾ The SIRIUS 3RN thermistor motor protection devices can be used to provide additional temperature-dependent protection.

Overload Relays

General data



Features	3RU21	3RB30/3RB31	3RB20/3RB21	3RB22/3RB23	3RB24	Benefits
Features						
RESET function	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Allows manual or automatic resetting of the device
Remote RESET function	✓ (by means of separate module)	✓ (only with 3RB31 and external auxiliary voltage 24 V DC)	✓ (only with 3RB21 and external auxiliary voltage 24 V DC)	✓ (electrically via external button)	✓ (electrically with button or via IO-Link)	<ul style="list-style-type: none"> Allows the remote resetting of the device
TEST function for auxiliary contacts	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Allows easy checking of the function and wiring
TEST function for electronics	--	✓	✓	✓	✓	<ul style="list-style-type: none"> Allows checking of the electronics
Status display	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Displays the current operating state
Large current adjustment button	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Makes it easier to set the relay exactly to the correct current value
Integrated auxiliary contacts (1 NO + 1 NC)	✓	✓	✓	✓ (2 ×)	--	<ul style="list-style-type: none"> Allows the load to be switched off if necessary Can be used to output signals
Integrated auxiliary contacts (1 CO and 1 NO in series)	--	--	--	--	✓	<ul style="list-style-type: none"> Enables the controlling of contactors directly from the higher-level control system through IO-Link
IO-Link connection	--	--	--	--	✓	<ul style="list-style-type: none"> Reduction of wiring in the control cabinet Enables communication
Connection of optional hand-held device	--	--	--	--	✓	<ul style="list-style-type: none"> Enables local operation
Communication capability through IO-Link						
Full starter functionality through IO-Link	--	--	--	--	✓	<ul style="list-style-type: none"> Enables in combination with the SIRIUS 3RT contactors the assembly of communication-capable motor starters (direct-on-line, reversing and star-delta (wye-delta) starting)
Readout of diagnostics functions	--	--	--	--	✓	<ul style="list-style-type: none"> Enables the reading out of diagnostics information such as overload, open circuit, ground fault, etc.
Readout of current values	--	--	--	--	✓	<ul style="list-style-type: none"> Enables the readout of current values and their direct processing in the higher-level control system
Readout of all set parameters	--	--	--	--	✓	<ul style="list-style-type: none"> Enables the readout of all set parameters, e.g. for plant documentation

✓ Available

-- Not available



Features	3RU21	3RB30/3RB31	3RB20/3RB21	3RB22/3RB23	3RB24	Benefits
Design of load feeders						
Short-circuit strength up to 100 kA at 690 V (in conjunction with the corresponding fuses or the corresponding motor starter protector)	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Provides optimum protection of the loads and operating personnel in the event of short circuits due to insulation faults or faulty switching operations
Electrical and mechanical matching to 3RT contactors	✓	✓	✓	✓ ¹⁾	✓ ¹⁾	<ul style="list-style-type: none"> Simplifies configuration Reduces wiring outlay and costs Enables stand-alone installation as well as space-saving direct mounting
Straight-through transformers for main circuit²⁾ (in this case the cables are routed through the feed-through openings of the overload relay and connected directly to the box terminals of the contactor)	--	✓ (S2, S3)	✓ (S6)	✓ (S00 ... S6)	✓ (S00 ... S6)	<ul style="list-style-type: none"> Reduces the contact resistance (only one point of contact) Saves wiring costs (easy, no need for tools, and fast) Saves material costs Reduces installation costs
Spring-type terminal system for main circuit²⁾	✓ (S00, S0)	✓ (S00, S0)	--	--	--	<ul style="list-style-type: none"> Enables fast connections Permits vibration-resistant connections Enables maintenance-free connections
Spring-type terminal system for auxiliary circuits²⁾	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Enables fast connections Permits vibration-resistant connections Enables maintenance-free connections
Full starter functionality through IO-Link	--	--	--	--	✓	<ul style="list-style-type: none"> Enables in combination with the SIRIUS 3RT contactors the assembly of communication-capable motor starters (direct-on-line, reversing and star-delta (wye-delta) starting)
Starter function	--	--	--	--	✓	<ul style="list-style-type: none"> Integration of feeders via IO-Link in the control system up to 630 A or 820 A

✓ Available

-- Not available

¹⁾ Exception: up to size S3, only stand-alone installation is possible.²⁾ Alternatively available for screw terminals.

Overload Relays

General data



Features	3RU21	3RB30/3RB31	3RB20/3RB21	3RB22/3RB23	3RB24	Benefits
Other features						
Temperature compensation	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Allows the use of the relays at high temperatures without derating Prevents premature tripping Allows compact installation of the control cabinet without distance between the devices/load feeders Simplifies configuration Enables space to be saved in the control cabinet
Very high long-term stability	✓	✓	✓	✓	✓	<ul style="list-style-type: none"> Provides safe protection for the loads even after years of use in severe operating conditions
Wide setting ranges	--	✓ (1:4)	✓ (1:4)	✓ (1:10)	✓ (1:10)	<ul style="list-style-type: none"> Minimize the configuration outlay and costs Minimize storage overheads, storage costs, tied-up capital
Fixed trip class	CLASS 10, CLASS 10A	3RB30: CLASS 10E or CLASS 20E	3RB20: CLASS 10E or CLASS 20E	--	--	<ul style="list-style-type: none"> Optimum motor protection for standard starts
Trip classes adjustable on the device CLASS 5E, 10E, 20E, 30E	--	3RB31: ✓	3RB21: ✓	✓	✓	<ul style="list-style-type: none"> Enables solutions for very fast starting motors requiring special protection (e.g. Ex motors) Enables heavy starting solutions Reduces the number of variants Minimizes the configuring outlay and costs Minimizes storage overhead, storage costs, and tied-up capital
Low power loss	--	✓	✓	✓	✓	<ul style="list-style-type: none"> Reduces power consumption and energy costs (up to 98 % less power is used than for thermal overload relays) Minimizes temperature rises of the contactor and control cabinet – in some cases this may eliminate the need for control cabinet cooling. Direct mounting to contactor saves space, even for high motor currents (i.e. no heat decoupling is required)
Internal power supply	-- ¹⁾	✓	✓	--	--	<ul style="list-style-type: none"> Eliminates the need for configuration and connecting an additional control circuit
Supplied from an external source via IO-Link	--	--	--	--	✓	<ul style="list-style-type: none"> Eliminates the need for configuration and connecting an additional control circuit

✓ Available

-- Not available

¹⁾ SIRIUS 3RU11 and 3RU21 thermal overload relays use a bimetal contactor and therefore do not require a control supply voltage.



Features	3RU21	3RB30/3RB31	3RB20/3RB21	3RB22/3RB23	3RB24	Benefits
Other features (continued)						
Overload warning	--	--	--	✓	✓	<ul style="list-style-type: none"> Indicates imminent tripping of the relay directly on the device due to overload, phase unbalance or phase failure through flickering of the LEDs or in the case of the 3RB24 as a signal through IO-Link Allows the imminent tripping of the relay to be signaled Allows measures to be taken in time in the event of inverse-time delayed overloading of the load for an extended period over the current limit Eliminates the need for an additional device Saves space in the control cabinet Reduces wiring outlay and costs
Analog output	--	--	--	✓	✓	<ul style="list-style-type: none"> Allows the output of an analog output signal for actuating moving-coil instruments, feeding programmable logic controllers or transfer to bus systems Eliminates the need for an additional measuring transducer and signal converter Saves space in the control cabinet Reduces wiring outlay and costs

✓ Available

-- Not available

Overload Relays

General data

Overview of overload relays – matching contactors

Overload relays	Current measurement	Current range	Contactors (type, size, rating in kW)							
			3RT201.	3RT202.	3RT203.	3RT204.	3RT105.	3RT106.	3RT107.	3TF68/3TF69
Type	A		S00 3/4/5.5/7.5	S0 5.5/7.5/11/15/18.5	S2 15/18.5/22/30/37	S3 37/45/55	S6 55/75/90	S10 110/132/160	S12 200/250	14 375/450

SIRIUS 3RU21 thermal overload relays



3RU211	Integrated	0.11 ... 16	✓	--	--	--	--	--	--	--
3RU212	Integrated	1.8 ... 40	--	✓	--	--	--	--	--	--
3RU213	Integrated	11 ... 80	--	--	✓	--	--	--	--	--
3RU214	Integrated	28 ... 100	--	--	--	✓	--	--	--	--

3RU21

SIRIUS 3RB30 electronic overload relays¹⁾



3RB301	Integrated	0.1 ... 16	✓	--	--	--	--	--	--	--
3RB302	Integrated	0.1 ... 40	--	✓	--	--	--	--	--	--
3RB303	Integrated	12.5 ... 80	--	--	✓	--	--	--	--	--
3RB304	Integrated	32 ... 115	--	--	--	✓	--	--	--	--

3RB30

SIRIUS 3RB31 electronic overload relays¹⁾



3RB311	Integrated	0.1 ... 16	✓	--	--	--	--	--	--	--
3RB312	Integrated	0.1 ... 40	--	✓	--	--	--	--	--	--
3RB313	Integrated	12.5 ... 80	--	--	✓	--	--	--	--	--
3RB314	Integrated	32 ... 115	--	--	--	✓	--	--	--	--

3RB31

SIRIUS 3RB20 electronic overload relays¹⁾



3RB205	Integrated	50 ... 200	--	--	--	--	✓	--	--	--
3RB206	Integrated	55 ... 630	--	--	--	--	--	✓	✓	✓
3RB201 + 3UF18	Integrated	630 ... 820	--	--	--	--	--	--	--	✓

3RB20

SIRIUS 3RB21 electronic overload relays¹⁾



3RB215	Integrated	50 ... 200	--	--	--	--	✓	--	--	--
3RB216	Integrated	55 ... 630	--	--	--	--	--	✓	✓	✓
3RB211 + 3UF18	Integrated	630 ... 820	--	--	--	--	--	--	--	✓

3RB21

SIRIUS 3RB22 to 3RB24 electronic overload relays¹⁾



3RB22, 3RB23, 3RB24	3RB2906	0.3 ... 25	✓	✓	--	--	--	--	--	--
	3RB2906	10 ... 100	✓	✓	✓	✓	--	--	--	--
	3RB2956	20 ... 200	--	✓	✓	✓	✓	--	--	--
	3RB2966	63 ... 630	--	--	--	--	--	✓	✓	✓
	3RB2906 + 3UF18	630 ... 820	--	--	--	--	--	--	--	✓

✓ Can be used
-- Cannot be used

¹⁾ "Technical specifications" for the use of overload relays with trip class ≥ CLASS 20E can be found in "Short-circuit protection with fuses for motor feeders" in the Configuration Manual "Load feeders – Configuring the SIRIUS Modular System – Selection data for Fuseless and Fused Load Feeders"

Connection methods3RU2 thermal overload relays

- Sizes S00 and S0:
 - Main and auxiliary circuit: Either screw or spring-type terminals
- Sizes S2 and S3:
 - Main circuit: Screw terminals with box terminal
 - Auxiliary circuit: Either screw or spring-type terminals

3RB3 electronic overload relays

- Sizes S00 and S0:
 - Main and auxiliary circuit: Either screw or spring-type terminals
- Sizes S2 and S3:
 - Main circuit: Screw terminals with box terminal or as straight-through transformer
 - Auxiliary circuit: Either screw or spring-type terminals

3RB2 electronic overload relays

3RB20 and 3RB21 overload relays:

- Size S6:
 - Main circuit: With busbar connection or as straight-through transformer
 - Auxiliary circuit: Either screw or spring-type terminals
- Sizes S10/S12:
 - Main circuit: With busbar connection
 - Auxiliary circuit: Either screw or spring-type terminals

3RB22 to 3RB24 evaluation modules:

- Screw or spring-type terminals

3RB29 current measuring modules:

- Up to size S3: Straight-through transformers
- As from size S6:
 - Main circuit: With busbar connection
 - Auxiliary circuit: Either screw or spring-type terminals



Screw terminals



Spring-type terminals



Busbar connections



Straight-through transformers

The various terminals and straight-through transformers are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

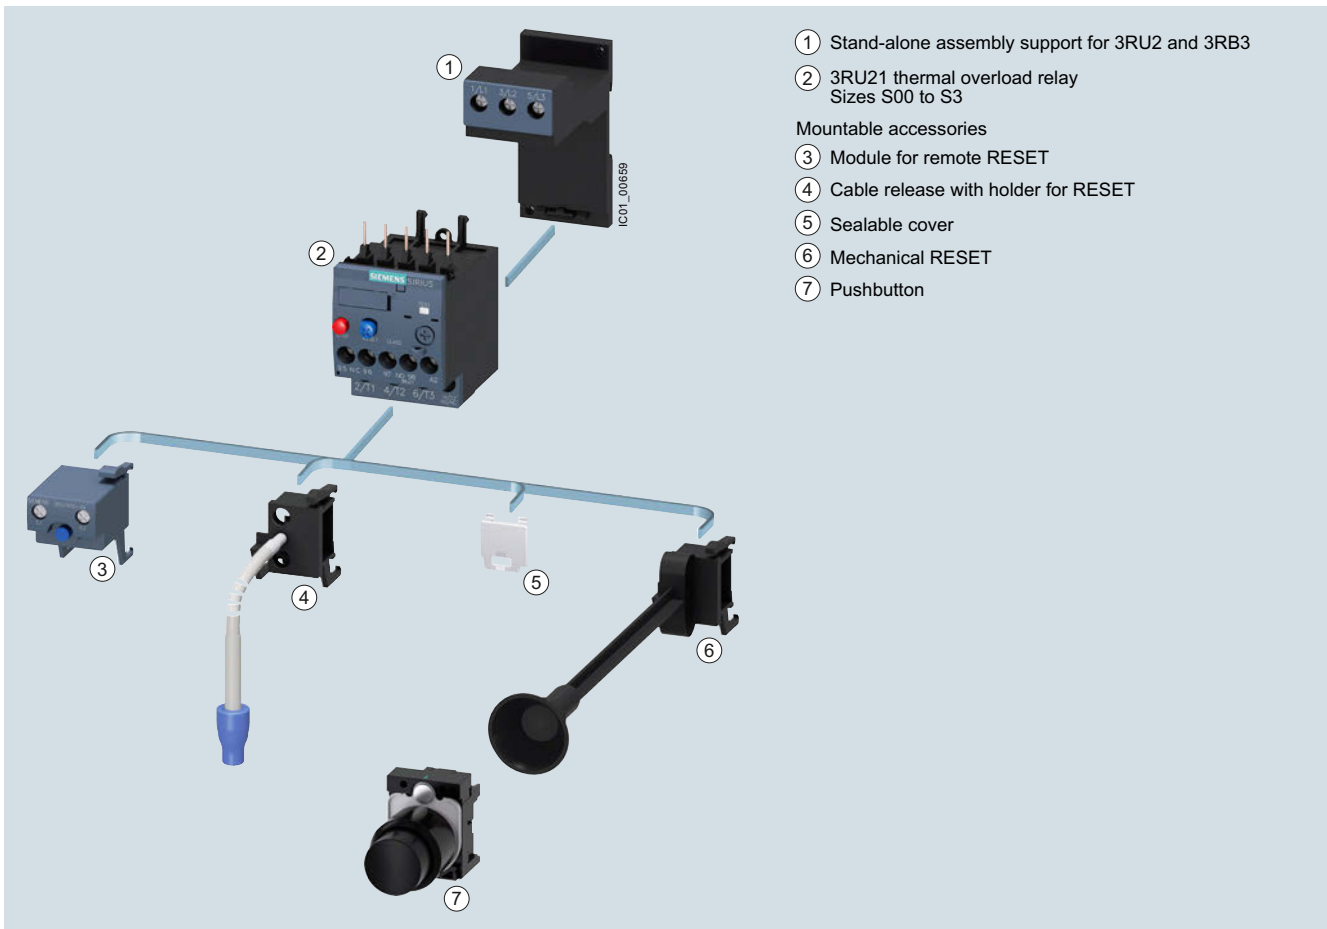
3RU2 for standard applications

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RU2
 TIA Selection Tool Cloud (TST Cloud), see <https://mall.industry.siemens.com/spice/TSTWeb?kmat=ElectronicOverloadRelay>
 Conversion tool, e.g. from 3RU11 to 3RU21, see www.siemens.com/sirius/conversion-tool

Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
 Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays / SIRIUS 3RB Electronic Overload Relays", see <http://support.automation.siemens.com/WW/view/en/60298164>
 Characteristics and certificates, see <https://support.industry.siemens.com/cs/ww/en/ps/16271>

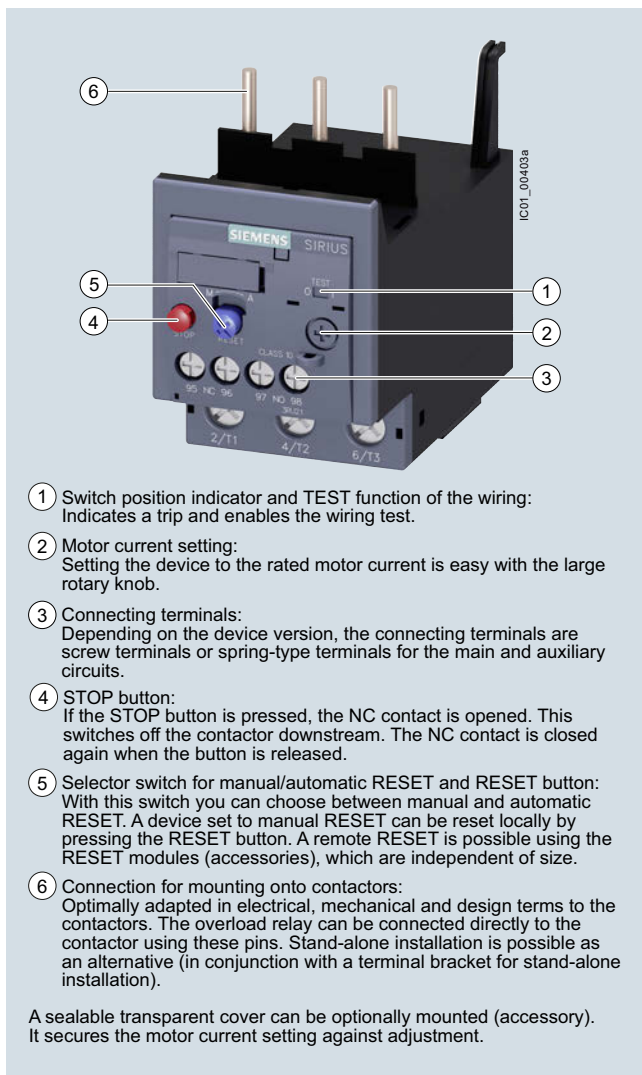


Mountable accessories for 3RU thermal overload relay

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications



3RU21 thermal overload relays up to 100 A have been designed to provide current-dependent protection for loads with normal starting against impermissibly high temperature rises due to overload or phase failure.

An overload or phase failure results in an increase of the motor current beyond the set rated motor current. Via heating elements, this current rise heats up the bimetal strips inside the device which then bend and as a result trigger the auxiliary contacts by means of a tripping mechanism. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and the current setting I_e and is stored in the form of a long-term stable tripping characteristic curve, see [Characteristic curves](#).

The "tripped" status is signaled by means of a switch position indicator. The relay is reset manually or automatically after a recovery time has elapsed.

The 3RU2 thermal overload relays are suitable for operation with frequency converters.

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

Use in hazardous areas

The 3RU2 overload relays are certified in accordance with both the European explosion protection directive (ATEX) and the international explosion protection standard (IECEx), see [Certificates](#).

SIRIUS 3RU2136-4.B0 thermal overload relay

Article No. scheme

Product versions		Article number									
Thermal overload relays		3RU2									
Device type	e.g. 1 = CLASS 10, 1 NO + 1 NC										
Size, rated operational current and power	e.g. 16 = 16 A (7.5 kW) for size S00										
Setting range for overload release	e.g. 0A = 0.11 ... 0.16 A										
Connection methods	e.g. B = screw terminals										
Installation type	e.g. 0 = mounting on contactor										
Example		3RU2 1 1 6 - 0 A B 0									

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications

Benefits

The most important features and benefits of the 3RU21 thermal overload relays are listed in the overview table (see "General data", page 7/75 onwards).

Application

Industries

The 3RU21 thermal overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed protection of their electrical loads (e.g. motors) under normal starting conditions (CLASS 10, 10A).

Application

The 3RU21 thermal overload relays have been designed for the protection of three-phase and single-phase AC and DC motors.

If single-phase AC or DC loads are to be protected by the 3RU21 thermal overload relays, all three bimetal strips must be heated. For this purpose, all main current paths of the relay must be connected in series.

Ambient conditions

3RU21 thermal overload relays compensate temperature in the temperature range from -40 °C to $+60\text{ °C}$ according to IEC 60947-4-1. At temperatures from $+60\text{ °C}$ to $+70\text{ °C}$, the upper set value of the setting range has to be reduced by a specific factor in accordance with the table below.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RU21 thermal overload relays in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, see [Application Manual](#).

For more information, see [page 1/7](#).

Technical specifications

More information

System Manual "SIRIUS Modular System – System Overview", see <https://support.industry.siemens.com/cs/ww/en/view/60311318>


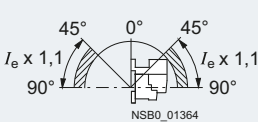



Configuration Manual "Configuring the SIRIUS Modular System – Selection data for Fuseless and Fused Load Feeders", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays / SIRIUS 3RB Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/60298164>

Technical data, see <https://support.industry.siemens.com/cs/ww/en/ps/16270/td>

The following technical information is intended to provide an initial overview of the various types of device and functions.


Type		3RU2116	3RU2126	3RU2136	3RU2146
Size		S00	S0	S2	S3
Dimensions (W x H x D) (overload relay with stand-alone installation support)					
• Screw terminals	mm	45 x 89 x 80	45 x 97 x 95	55 x 105 x 117	70 x 106 x 124
• Spring-type terminals	mm	45 x 102 x 79	45 x 114 x 95	55 x 105 x 117	70 x 106 x 124
General data					
Tripping in the event of		Overload and phase failure			
Trip class acc. to IEC 60947-4-1	Class	10		10, 10A	
Phase failure sensitivity		Yes			
Overload warning		No			
Reset and recovery		Manual, automatic and remote RESET (remote RESET in conjunction with the appropriate accessories)			
• Reset options after tripping					
• Recovery time		Depends on the strength of the tripping current and characteristic			
- For automatic RESET	min.	Depends on the strength of the tripping current and characteristic			
- For manual RESET	min.	Depends on the strength of the tripping current and characteristic			
- For remote RESET	min.	Depends on the strength of the tripping current and characteristic			
Features		Yes, by means of TEST function/switch position indicator slide			
• Display of operating state on device		Yes			
• TEST function		Yes			
• RESET button		Yes			
• STOP button		Yes			
Protection of motors in hazardous environments		DMT 98 ATEX G 001 II (2) GD			
• according to European Directive 2014/34/EU (ATEX)		IECEx BVS 15.0046			
• according to international standard IECEx		see https://support.industry.siemens.com/cs/ww/en/ps/16270/cert			

Type			3RU2116	3RU2126	3RU2136	3RU2146
Size			S00	S0	S2	S3
Dimensions (W x H x D) (overload relay with stand-alone installation support)						
• Screw terminals	mm	45 x 89 x 80	45 x 97 x 95	55 x 105 x 117	70 x 106 x 124	
• Spring-type terminals	mm	45 x 102 x 79	45 x 114 x 95	55 x 105 x 117	70 x 106 x 124	
General data (continued)						
Ambient temperature						
• Storage/transport	°C	-55 ... +80				
• Operation	°C	-40 ... +70				
• Temperature compensation	°C	Up to +60				
• Permissible rated current at						
- Temperature inside control cabinet 60 °C	%	100 (current reduction is required above +60 °C)				
- Temperature inside control cabinet 70 °C	%	87				
Repeat terminals						
• Coil repeat terminals		Yes	Not required			
• Auxiliary contact repeat terminal		Yes	Not required			
Degree of protection acc. to IEC 60529		IP20	- IP20 (front side) - Terminal IP00 (use additional terminal covers for higher degree of protection)			
Touch protection acc. to IEC 60529		Finger-safe				
Shock resistance with sine acc. to IEC 60068-2-27	g/ms	15/11 (auxiliary contacts 95/96 and 97/98: 8 g/11 ms)				
Electromagnetic compatibility (EMC)						
• Interference immunity		Not relevant				
• Emitted interference		Not relevant				
Resistance to extreme climates – air humidity	%	90				
Installation altitude above sea level	m	Up to 2 000				
Mounting position	<p>The diagrams show the permissible mounting positions for mounting onto contactors and stand-alone installation. For mounting position in the hatched area, a setting correction of 10 % must be implemented.</p> <p>Stand-alone installation:</p> <div></div> <p>Contactor + overload relay:</p> <div></div>					
Type of mounting	For mounting onto contactor or stand-alone installation with terminal support, screw and snap-on mounting onto standard mounting rail.					

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications

Type		3RU2116	3RU2126	3RU2136	3RU2146
Size		S00	S0	S2	S3
Main circuit					
Rated insulation voltage U_i (pollution degree 3)	V	690			1000
Rated impulse withstand voltage U_{imp}	kV	6			8
Rated operational voltage U_e	V	690			
Type of current		Yes			
• Direct current		Yes			
• Alternating current		Yes, frequency range up to 400 Hz			
Current setting	A	0.11 ... 0.16 to	1.8 ... 2.5 to	11 ... 16 to	28 ... 40 to
	A	11 ... 16	34 ... 40	70 ... 80	80 ... 100
Power loss per unit (max.)	W	4.1 ... 6.3	6.2 ... 7.5	8 ... 14	12 ... 16.5
Short-circuit protection					
• With fuse without contactor		See "Selection and ordering data", pages 7/88 ... 7/91			
• With fuse and contactor		"Short-Circuit Protection with Fuses/Motor Starter Protectors for Motor Feeders", see Configuration Manual.			
Protective separation between main and auxiliary current paths acc. to IEC 60947-1					
• Screw terminals or ring terminal lug connections	V	440	690: Setting range ≤ 25 A	690	
• Spring-type terminals	V	440	440: Setting range > 25 A	690	
Conductor cross-sections of main circuit					
Connection type		Screw terminals			Screw terminals with box terminal
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2	M6, Pozidriv size 2	4 mm Allen screw
Operating devices	mm	∅ 5 ... 6	∅ 5 ... 6	∅ 5 ... 6	4 mm Allen screw
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5	3 ... 4.5	4.5 ... 6
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾ , max. 2 x 4	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 10) ¹⁾	2 x (2.5 ... 35) ¹⁾ , 1 x (2.5 ... 50) ¹⁾	2 x (2.5 ... 16) ¹⁾ , 2 x (10 ... 50) ¹⁾ , 1 x (10 ... 70) ¹⁾
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 6) ¹⁾ , max. 1 x 10	2 x (1 ... 25) ¹⁾ , 1 x (1 ... 35) ¹⁾	2 x (2.5 ... 35) ¹⁾ , 1 x (2.5 ... 50) ¹⁾
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾ , 2 x 12	2 x (16 ... 12) ¹⁾ , 2 x (14 ... 8) ¹⁾	2 x (18 ... 2) ¹⁾ , 1 x (18 ... 1) ¹⁾	2 x (10 ... 1/0) ¹⁾ , 1 x (10 ... 2/0) ¹⁾
Removable box terminals ²⁾					
• With copper bars ³⁾	mm	--	--	--	2 x 12 x 4
• With cable lugs ⁴⁾					
- Terminal screw		--	--	--	M6
- Prescribed tightening torque	Nm	--	--	--	4.5 ... 6
- Usable ring terminal lugs	mm	--	--	--	d ₂ = min. 6.3 d ₃ = max. 19
					
Connection type		Spring-type terminals			
Operating devices	mm	3.0 x 0.5 and 3.5 x 0.5			
Conductor cross-sections (min./max.), 1 conductor can be connected					
• Solid or stranded	mm ²	1 x (0.5 ... 4)	1 x (1 ... 10)	--	
• Finely stranded without end sleeve	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)	--	
• AWG cables, solid or stranded	AWG	1 x (20 ... 12)	1 x (18 ... 8)	--	

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

²⁾ Cable lug and busbar connection possible after removing the box terminals.



³⁾ If bars larger than 12 mm x 10 mm are connected, a 3RT2946-4EA2 cover is needed to maintain the required phase clearance, see page 7/93.

⁴⁾ If conductors larger than 25 mm² are connected, the 3RT2946-4EA2 cover is needed to maintain the required phase clearance, see page 7/93.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications

Type		3RU2116	3RU2126	3RU2136	3RU2146
Size		S00	S0	S2	S3
Auxiliary circuit					
Number of NO contacts		1			
Number of NC contacts		1			
Auxiliary contacts – assignment		1 NO for the signal "tripped"; 1 NC for disconnecting the contactor			
Rated insulation voltage U_i (pollution degree 3)	V	690			
Rated impulse withstand voltage U_{imp}	kV	6			
Contact rating of the auxiliary contacts					
• NC, NO contacts with alternating current AC-15, rated operational current I_e at U_e					
- 24 V	A	3			
- 120 V	A	3			
- 125 V	A	3			
- 230 V	A	2			
- 400 V	A	1			
- 600 V	A	0.75			
- 690 V	A	0.75			
• NC, NO contacts with direct current DC-13, rated operational current I_e at U_e					
- 24 V	A	1			
- 110 V	A	0.22			
- 125 V	A	0.22			
- 220 V	A	0.11			
• Contact reliability (suitability for PLC control; 17 V, 5 mA)		Yes			
Short-circuit protection					
• With fuse					
- Operational class gG	A	6			
- Quick	A	10			
• With miniature circuit breaker (C characteristic)	A	6 (up to $I_k \leq 0.5$ kA; $U \leq 260$ V)			
Reliable operational voltage for protective separation between auxiliary current paths Acc. to IEC 60947-1	V	440			
CSA, UL, UR rated data					
Auxiliary circuit – switching capacity		B600, R300			
Conductor cross-sections for auxiliary circuit					
Connection type		 Screw terminals			
Terminal screw		M3, Pozidriv size 2			
Operating devices		mm	Ø 5 ... 6		
Prescribed tightening torque		Nm	0.8 ... 1.2		
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾			
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾			
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾			
Connection type		 Spring-type terminals			
Operating devices		mm	3.0 x 0.5 and 3.5 x 0.5		
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	2 x (0.5 ... 2.5)			
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)			
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	2 x (0.5 ... 1.5)			
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)			

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications **IE3/IE4 ready**

Selection and ordering data

3RU21 thermal overload relays for mounting onto contactor¹⁾, sizes S00 and S0, CLASS 10

Features and technical specifications:

- Connection methods
Main and auxiliary circuit: Either screw or spring-type terminals
- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET

- Switch position indicator
- TEST function
- STOP button
- Sealable covers (optional accessory)

PU (UNIT, SET, M) = 1
PS* = 1 UNIT
PG = 41F



3RU2116-4AB0



3RU2116-4AC0



3RU2126-4FB0



3RU2126-4AC0

Size contactor	Trip class	Rated power for three-phase motors, rated value ²⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ³⁾	SD	Screw terminals		SD	Spring-type terminals			
						Article No.	Price per PU		Article No.	Price per PU		
Size S00												
S00	10	0.04	0.11 ... 0.16	0.5	▶	3RU2116-0AB0	5	3RU2116-0AC0				
	10	0.06	0.14 ... 0.2	1	▶	3RU2116-0BB0	5	3RU2116-0BC0				
	10	0.06	0.18 ... 0.25	1	▶	3RU2116-0CB0	5	3RU2116-0CC0				
	10	0.09	0.22 ... 0.32	1.6	▶	3RU2116-0DB0	5	3RU2116-0DC0				
	10	0.09	0.28 ... 0.4	2	▶	3RU2116-0EB0	5	3RU2116-0EC0				
	10	0.12	0.35 ... 0.5	2	▶	3RU2116-0FB0	5	3RU2116-0FC0				
	10	0.18	0.45 ... 0.63	2	▶	3RU2116-0GB0	5	3RU2116-0GC0				
	10	0.18	0.55 ... 0.8	4	▶	3RU2116-0HB0	5	3RU2116-0HC0				
	10	0.25	0.7 ... 1	4	▶	3RU2116-0JB0	5	3RU2116-0JC0				
	10	0.37	0.9 ... 1.25	4	▶	3RU2116-0KB0	5	3RU2116-0KC0				
	10	0.55	1.1 ... 1.6	6	▶	3RU2116-1AB0	5	3RU2116-1AC0				
	10	0.75	1.4 ... 2	6	▶	3RU2116-1BB0	5	3RU2116-1BC0				
	10	0.75	1.8 ... 2.5	10	▶	3RU2116-1CB0	5	3RU2116-1CC0				
	10	1.1	2.2 ... 3.2	10	▶	3RU2116-1DB0	5	3RU2116-1DC0				
	10	1.5	2.8 ... 4	16	▶	3RU2116-1EB0	5	3RU2116-1EC0				
	10	1.5	3.5 ... 5	20	▶	3RU2116-1FB0	5	3RU2116-1FC0				
	10	2.2	4.5 ... 6.3	20	▶	3RU2116-1GB0	5	3RU2116-1GC0				
	10	3	5.5 ... 8	25	▶	3RU2116-1HB0	5	3RU2116-1HC0				
	10	4	7 ... 10	35	▶	3RU2116-1JB0	5	3RU2116-1JC0				
	10	5.5	9 ... 12.5	35	▶	3RU2116-1KB0	5	3RU2116-1KC0				
	10	7.5	11 ... 16	40	▶	3RU2116-4AB0	5	3RU2116-4AC0				
	Size S0											
	S0	10	0.75	1.8 ... 2.5	10	▶	3RU2126-1CB0	5	3RU2126-1CC0			
		10	1.1	2.2 ... 3.2	10	▶	3RU2126-1DB0	5	3RU2126-1DC0			
10		1.5	2.8 ... 4	16	▶	3RU2126-1EB0	5	3RU2126-1EC0				
10		1.5	3.5 ... 5	20	▶	3RU2126-1FB0	5	3RU2126-1FC0				
10		2.2	4.5 ... 6.3	20	▶	3RU2126-1GB0	5	3RU2126-1GC0				
10		3	5.5 ... 8	25	▶	3RU2126-1HB0	5	3RU2126-1HC0				
10		4	7 ... 10	35	▶	3RU2126-1JB0	5	3RU2126-1JC0				
10		5.5	9 ... 12.5	35	▶	3RU2126-1KB0	5	3RU2126-1KC0				
10		7.5	11 ... 16	40	▶	3RU2126-4AB0	▶	3RU2126-4AC0				
10		7.5	14 ... 20	50	▶	3RU2126-4BB0	▶	3RU2126-4BC0				
10		11	17 ... 22	63	▶	3RU2126-4CB0	▶	3RU2126-4CC0				
10		11	20 ... 25	63	▶	3RU2126-4DB0	▶	3RU2126-4DC0				
10		15	23 ... 28	63	▶	3RU2126-4NB0	▶	3RU2126-4NC0				
10		15	27 ... 32	80	▶	3RU2126-4EB0	▶	3RU2126-4EC0				
10		18.5	30 ... 36	80	▶	3RU2126-4PB0	▶	3RU2126-4PC0				
10		18.5	34 ... 40	80	▶	3RU2126-4FB0	▶	3RU2126-4FC0				

¹⁾ With the appropriate terminal supports (see "Accessories", page 7/92), the 3RU2 overload relays for mounting on contactors can also be installed as stand-alone units.

²⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

³⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see Configuration Manual.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

IE3/IE4 ready 3RU2 for standard applications

3RU21 thermal overload relays for mounting onto contactor¹⁾, sizes S2 and S3, CLASS 10 or 10A

Features and technical specifications:

- Connection methods
 - Main circuit: Screw terminals with box terminal
 - Auxiliary circuit: Either screw or spring-type terminals
- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET

- Switch position indicator
- TEST function
- STOP button
- Sealable covers (optional accessory)

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41F


3RU2136-4.B0




















3RU2136-4.D0



3RU2146-4.B0



3RU2146-4.D0

Size contactor	Trip class	Rated power for three-phase motors, rated value ²⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ³⁾	SD	Screw terminals		SD	Spring-type terminals (on auxiliary current side)	
	Class	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU
Size S2										
S2	10	 3	5.5 ... 8	25	5	3RU2136-1HB0		5	3RU2136-1HD0	
	10	 4	7 ... 10	35	5	3RU2136-1JB0		5	3RU2136-1JD0	
	10	 5.5	9 ... 12.5	35	5	3RU2136-1KB0		5	3RU2136-1KD0	
	10	7.5	11 ... 16	40	5	3RU2136-4AB0		5	3RU2136-4AD0	
	10	7.5	14 ... 20	50	5	3RU2136-4BB0		5	3RU2136-4BD0	
	10	11	18 ... 25	63	5	3RU2136-4DB0		5	3RU2136-4DD0	
	10	15	22 ... 32	80	5	3RU2136-4EB0		5	3RU2136-4ED0	
	10	18.5	28 ... 40	80	5	3RU2136-4FB0		5	3RU2136-4FD0	
	10	22	36 ... 45	100		3RU2136-4GB0			3RU2136-4GD0	
	10	22	40 ... 50	100		3RU2136-4HB0			3RU2136-4HD0	
	10	30	47 ... 57	100		3RU2136-4QB0			3RU2136-4QD0	
	10	30	54 ... 65	125		3RU2136-4JB0			3RU2136-4JD0	
	10A	37	62 ... 73	160		3RU2136-4KB0			3RU2136-4KD0	
	10A	37	70 ... 80	160		3RU2136-4RB0			3RU2136-4RD0	
Size S3										
S3	10	18.5	28 ... 40	80	1	3RU2146-4FB0		5	3RU2146-4FD0	
	10	22	36 ... 50	125	1	3RU2146-4HB0		5	3RU2146-4HD0	
	10	30	45 ... 63	125	1	3RU2146-4JB0		1	3RU2146-4JD0	
	10	37	57 ... 75	160	1	3RU2146-4KB0		1	3RU2146-4KD0	
	10	45	70 ... 90	160	1	3RU2146-4LB0		1	3RU2146-4LD0	
	10	45	80 ... 100 ⁴⁾	200	1	3RU2146-4MB0		1	3RU2146-4MD0	

¹⁾ With the appropriate terminal supports (see "Accessories", page 7/92), the 3RU2 overload relays for mounting on contactors can also be installed as stand-alone units.

²⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

³⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see Configuration Manual.

⁴⁾ For overload relays > 100 A, see 3RB2 electronic overload relays, page 7/106 onwards.

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

3RU2 for standard applications **IE3/IE4 ready**

3RU21 thermal overload relays for stand-alone installation, sizes S00 and S0, CLASS 10

Features and technical specifications:

- Connection methods
Main and auxiliary circuit: Either screw or spring-type terminals
- Overload and phase failure protection
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET

- Switch position indicator
- TEST function
- STOP button
- Sealable covers (optional accessory)

PU (UNIT, SET, M) = 1
PS* = 1 UNIT
PG = 41F



3RU2116-..B1





3RU2116-..C1



3RU2126-..B1



3RU2126-..C1

Size contac- tor	Trip class	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals		SD	Spring-type terminals	
	Class	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU
Size S00										
S00	10	0.04	0.11 ... 0.16	0.5	5	3RU2116-0AB1	5	5	3RU2116-0AC1	
	10	0.06	0.14 ... 0.2	1	5	3RU2116-0BB1	5	5	3RU2116-0BC1	
	10	0.06	0.18 ... 0.25	1	5	3RU2116-0CB1	5	5	3RU2116-0CC1	
	10	0.09	0.22 ... 0.32	1.6	5	3RU2116-0DB1	5	5	3RU2116-0DC1	
	10	0.09	0.28 ... 0.4	2	5	3RU2116-0EB1	5	5	3RU2116-0EC1	
	10	0.12	0.35 ... 0.5	2	5	3RU2116-0FB1	5	5	3RU2116-0FC1	
	10	0.18	0.45 ... 0.63	2	5	3RU2116-0GB1	5	5	3RU2116-0GC1	
	10	0.18	0.55 ... 0.8	4	5	3RU2116-0HB1	5	5	3RU2116-0HC1	
	10	0.25	0.7 ... 1	4	5	3RU2116-0JB1	5	5	3RU2116-0JC1	
	10	0.37	0.9 ... 1.25	4	5	3RU2116-0KB1	5	5	3RU2116-0KC1	
	10	0.55	1.1 ... 1.6	6	5	3RU2116-1AB1	5	5	3RU2116-1AC1	
	10	0.75	1.4 ... 2	6	5	3RU2116-1BB1	5	5	3RU2116-1BC1	
	10	0.75	1.8 ... 2.5	10	5	3RU2116-1CB1	5	5	3RU2116-1CC1	
	10	1.1	2.2 ... 3.2	10	5	3RU2116-1DB1	5	5	3RU2116-1DC1	
	10	1.5	2.8 ... 4	16	5	3RU2116-1EB1	5	5	3RU2116-1EC1	
	10	1.5	3.5 ... 5	20	5	3RU2116-1FB1	5	5	3RU2116-1FC1	
	10	2.2	4.5 ... 6.3	20	5	3RU2116-1GB1	5	5	3RU2116-1GC1	
	10	3	5.5 ... 8	25	5	3RU2116-1HB1	5	5	3RU2116-1HC1	
	10	4	7 ... 10	35	5	3RU2116-1JB1	5	5	3RU2116-1JC1	
	10	5.5	9 ... 12.5	35	5	3RU2116-1KB1	5	5	3RU2116-1KC1	
	10	7.5	11 ... 16	40	5	3RU2116-4AB1	5	5	3RU2116-4AC1	
Size S0										
S0	10	7.5	14 ... 20	50	5	3RU2126-4BB1	5	5	3RU2126-4BC1	
	10	11	17 ... 22	63	5	3RU2126-4CB1	5	5	3RU2126-4CC1	
	10	11	20 ... 25	63	5	3RU2126-4DB1	5	5	3RU2126-4DC1	
	10	15	23 ... 28	63	5	3RU2126-4NB1	5	5	3RU2126-4NC1	
	10	15	27 ... 32	80	5	3RU2126-4EB1	5	5	3RU2126-4EC1	
	10	18.5	30 ... 36	80	5	3RU2126-4PB1	5	5	3RU2126-4PC1	
	10	18.5	34 ... 40	80	5	3RU2126-4FB1	5	5	3RU2126-4FC1	

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see [Configuration Manual](#).

Overload Relays

SIRIUS 3RU2 Thermal Overload Relays

IE3/IE4 ready 3RU2 for standard applications

3RU21 thermal overload relays for stand-alone installation, sizes S2 and S3, CLASS 10 or 10A

Features and technical specifications:

- Connection methods
 - Main circuit: Screw terminals with box terminal
 - Auxiliary circuit: Either screw or spring-type terminals
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator

- TEST function
- STOP button
- Sealable covers (optional accessory)

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41F


3RU2136-..B1



3RU2136-..D1



3RU2146-..B1



3RU2146-..D1

Size contac- tor	Trip class	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals	SD	Spring-type terminals
						Article No.	Price per PU	Article No.
	CLASS	kW	A	A	d			Price per PU
Size S2								
S2	10	15	22 ... 32	80	5	3RU2136-4EB1	5	3RU2136-4ED1
	10	18.5	28 ... 40	80	5	3RU2136-4FB1	5	3RU2136-4FD1
	10	22	36 ... 45	100	▶	3RU2136-4GB1	▶	3RU2136-4GD1
	10	22	40 ... 50	100	▶	3RU2136-4HB1	▶	3RU2136-4HD1
	10	30	47 ... 57	100	▶	3RU2136-4QB1	▶	3RU2136-4QD1
	10	30	54 ... 65	125	▶	3RU2136-4JB1	▶	3RU2136-4JD1
	10A	37	62 ... 73	160	▶	3RU2136-4KB1	▶	3RU2136-4KD1
	10A	37	70 ... 80	160	▶	3RU2136-4RB1	▶	3RU2136-4RD1
Size S3								
S3	10	30	45 ... 63	125	1	3RU2146-4JB1	5	3RU2146-4JD1
	10	37	57 ... 75	160	1	3RU2146-4KB1	5	3RU2146-4KD1
	10	45	70 ... 90	160	1	3RU2146-4LB1	5	3RU2146-4LD1
	10	45	80 ... 100 ³⁾	200	1	3RU2146-4MB1	X	3RU2146-4MD1

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see [Configuration Manual](#).

³⁾ For overload relays > 100 A, see [3RB2 electronic overload relays, page 7/106 onwards](#).

Überlastrelais

SIRIUS 3RU2 Thermal Overload Relays










Accessories

Overview

The following optional accessories are available for the 3RU21 thermal overload relays:

- Size-specific terminal support for stand-alone installation, in sizes S00 and S0 also with spring-type terminals
- Mechanical RESET (for all sizes)
- Cable release for resetting devices which are difficult to access (for all sizes)
- Electrical remote RESET module in three voltage variants (for all sizes)
- Sealable cover (for all sizes)
- Terminal covers for devices with screw terminals (box terminals) and ring terminal lug connections






Selection and ordering data

Version	Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
			d				
Terminal supports for stand-alone installation							
 3RU2916-3AA01	Terminal supports for overload relays with screw terminals		<div>Screw terminals</div>				
	For separate mounting of the overload relays; screw and snap-on mounting onto standard mounting rail	S00	▶	3RU2916-3AA01	1	1 unit	41F
		S0	▶	3RU2926-3AA01	1	1 unit	41F
		S2	▶	3RU2936-3AA01	1	1 unit	41F
		S3	1	3RU2946-3AA01	1	1 unit	41F
 3RU2926-3AA01	Terminal supports for overload relays with spring-type terminals		<div>Spring-type terminals</div>				
	For separate mounting of the overload relays; screw and snap-on mounting onto standard mounting rail	S00	5	3RU2916-3AC01	1	1 unit	41F
		S0	5	3RU2926-3AC01	1	1 unit	41F
 3RU2936-3AA01							
 3RU2946-3AA01							
 3RU2916-3AC01							
 3RU2926-3AC01							
Mechanical RESET							
 3RU2900-1A with pushbutton and extension plunger	Resetting plungers, holders and formers		S00 ... S3 ▶	3RU2900-1A	1	1 unit	41F
	Pushbuttons with extended stroke (12 mm), IP65, Ø 22 mm		S00 ... S3 ▶	3SU1200-0FB10-0AA0	1	1 unit	41J
	Extension plungers		S00 ... S3 ▶	3SU1900-0KG10-0AA0	1	1 unit	41J
	For compensation of the distance between the pushbutton and the unlatching button of the relay						





Überlastrelais

SIRIUS 3RU2 Thermal Overload Relays

Accessories

Version	Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
			d				
Cable releases with holder for RESET							
	For Ø 6.5 mm holes in the control panel; max. control panel thickness 8 mm						
	• Length 400 mm	S00 ... S3 ▶	3RU2900-1B		1	1 unit	41F
	• Length 600 mm	S00 ... S3 ▶	3RU2900-1C		1	1 unit	41F
3RU2900-1.							
Modules for remote RESET, electrical							
	Operating range 0.85 ... 1.1 x U_N , Power consumption 80 VA AC, 70 W DC, ON time 0.2 ... 4 s, Switching frequency 60/h						
	• 24 ... 30 V AC/DC	S00 ... S3 2	3RU1900-2AB71		1	1 unit	41F
	• 110 ... 127 V AC/DC	S00 ... S3 2	3RU1900-2AF71		1	1 unit	41F
	• 220 ... 250 V AC/DC	S00 ... S3 2	3RU1900-2AM71		1	1 unit	41F
3RU1900-2A.71							
Sealable covers							
	For covering the setting knobs	S00 ... S3 ▶	3RV2908-0P		100	10 units	41E
3RV2908-0P							
Terminal covers							
	Covers for devices with screw terminals (box terminals) Additional touch protection for fastening to the box terminals		Screw terminals 				
	• Main current level	S2 2	3RT2936-4EA2		1	1 unit	41B
		S3 ▶	3RT2946-4EA2		1	1 unit	41B
3RT2936-4EA2							

General accessories

Version	Size	Color	For overload re- lays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
					d				
Tools for opening spring-type terminals									
	Screwdrivers For all SIRIUS devices with spring-type terminals		Length approx. 200 mm, 3.0 mm x 0.5 mm	Titanium gray/ black, partially insulated	Main and auxiliary circuit connection: 3RU2	2			
						Spring-type terminals			
3RA2908-1A						3RA2908-1A		1	1 unit 41B
Blank labels									
	Unit labeling plates¹⁾ For SIRIUS devices		20 mm x 7 mm	Pastel turquoise	3RU2	20	3RT1900-1SB20	100	340 units 41B
			20 mm x 7 mm	Titanium gray	3RU2	20	3RT2900-1SB20	100	340 units 41B
	Adhesive inscription labels¹⁾ For SIRIUS devices		19 mm x 6 mm	Pastel turquoise	3RU2	15	3RT1900-1SB60	100	3 060 units 41B
			19 mm x 6 mm	Zinc yellow	3RU2	15	3RT1900-1SD60	100	3 060 units 41B
3RT1900-1SB20									
									
3RT2900-1SB20									

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/15).

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

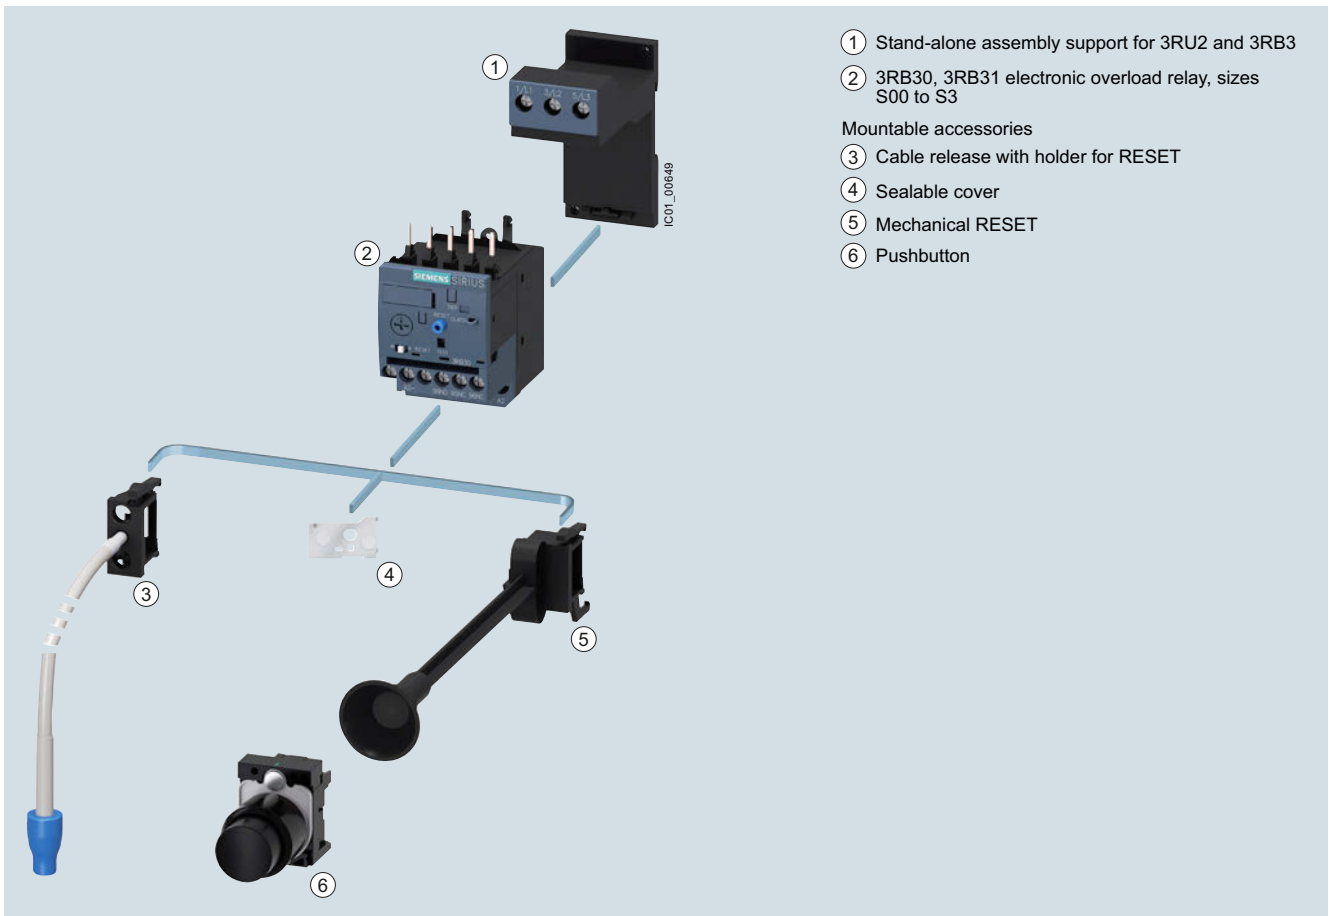
3RB30, 3RB31 for standard applications

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RB3
 TIA Selection Tool Cloud (TST Cloud), see <https://mall.industry.siemens.com/spice/TSTWeb?kmat=ElectronicOverloadRelay>
 Conversion tool, e.g. from 3RB20/3RB211 to 3RB30/3RB31, see www.siemens.com/sirius/conversion-tool

Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
 Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays / SIRIUS 3RB Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/60298164>
 Characteristics and certificates, see <https://support.industry.siemens.com/cs/ww/en/ps/16276>

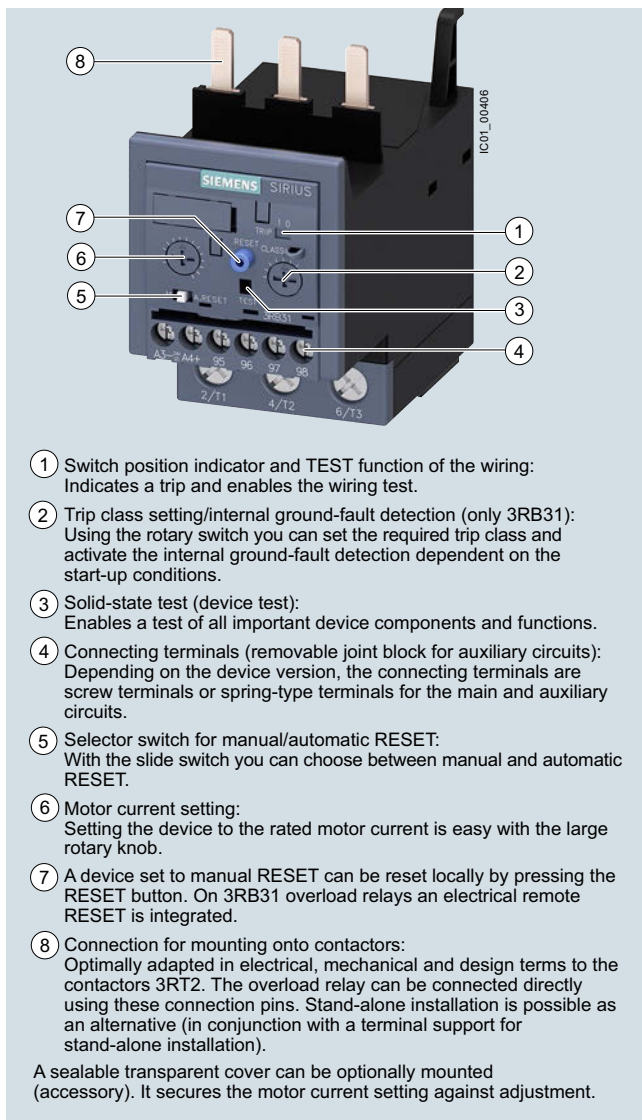


Mountable accessories for 3RB30 and 3RB31 electronic overload relays

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications



SIRIUS 3RB3133-4.B0 electronic overload relay

The 3RB30/3RB31 electronic overload relays up to 115 A with internal power supply have been designed for current-dependent protection of loads with normal and heavy starting, and to protect against excessive temperature rises due to overload, phase unbalance or phase failure. An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current. This current rise is detected by the current transformers integrated into the devices and evaluated by corresponding electronic circuits which then output a pulse to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and the current setting I_e and is stored in the form of a long-term stable tripping characteristic curve (see [Characteristic curves](#)).

In addition to inverse-time delayed protection of loads against excessive temperature rises due to overload, phase unbalance and phase failure, the 3RB31 electronic overload relays also allow internal ground-fault detection (not possible in conjunction with contactor assemblies for wye-delta starting). This provides protection of loads against high-resistance short circuits due to damage to the insulation material, moisture, condensed water, etc.

The "tripped" status is signaled by means of a switch position indicator. The relay is reset manually or automatically after the recovery time has elapsed.

The 3RB3 electronic overload relays are suitable for operation with frequency converters.

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

3RB20 and 3RB21 overload relays in sizes S6 to S10/S12, see [page 7/113 onwards](#).

Use in hazardous areas

The 3RB30/3RB31 electronic overload relays are suitable for the overload protection of motors with the following types of protection:

- Ex II (2) G [Ex e] [Ex d] [Ex px]
- Ex II (2) D [Ex t] [Ex p]

EC type test certificate for Group II, Category (2) G/D exists. It has the number PTB 09 ATEX 3001.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications

Article No. scheme

Product versions		Article number						
Electronic overload relays		3RB3 □ □ □ - □ □ □ □						
Device type	e.g. 0 = standard device, with internal supply, for three-phase loads	□	□	□	-	□	□	□
Size, rated operational current and power	e.g. 1 = 16 A (7.5 kW) for size S00	□	□	□	□	□	□	□
Version of the automatic RESET, electrical remote RESET	e.g. 6 = switchable between manual/auto RESET	□	□	□	□	□	□	□
Trip class (CLASS)	e.g. 1 = CLASS 10E	□	□	□	□	□	□	□
Setting range of the overload release	e.g. R = 0.1 ... 0.4 A	□	□	□	□	□	□	□
Connection methods	e.g. B = screw terminals for main and auxiliary circuits	□	□	□	□	□	□	□
Installation type	e.g. 0 = mounting on contactor	□	□	□	□	□	□	□
Example		3RB3	0	1	6	-	1	R B 0

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

The most important features and benefits of the 3RB30/3RB31 electronic overload relays are listed in the overview table (see "General data", page 7/75 onwards).

Application

Industries

The 3RB30/3RB31 electronic overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed protection of their electrical loads (e.g. motors) under normal and heavy starting conditions (CLASS 5E to 30E), minimize project completion times, inventories and energy consumption, and optimize plant availability and maintenance management.

Application

The 3RB30/3RB31 electronic overload relays have been designed for the protection of three-phase motors in sinusoidal 50/60 Hz voltage networks. The relays are not suitable for the protection of single-phase AC or DC loads.

The 3RU21 thermal overload relay or the 3RB22/3RB23/3RB24 electronic overload relay can be used for single-phase AC loads. For DC loads we recommend the 3RU21 thermal overload relay.

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive ambient conditions, ageing and temperature fluctuations.

For the temperature range from -25 °C to +60 °C, the 3RB30/3RB31 electronic overload relays compensate the temperature in accordance with IEC 60947-4-1.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RB30/3RB31 electronic overload relays in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, see [Application Manual](#).

For more information, see page 1/7.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications

Technical specifications

More information


System Manual "SIRIUS Modular System – System Overview", see <https://support.industry.siemens.com/cs/ww/en/view/60311318>

Configuration Manual "Configuring the SIRIUS Modular System – Selection data for Fuseless and Fused Load Feeders", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays / SIRIUS 3RB Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/60298164>

Technical data see <https://support.industry.siemens.com/cs/ww/en/ps/16276/td>


The following technical information is intended to provide an initial overview of the various types of device and functions.

Type		3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size		S00	S0	S2	S3
Dimensions (W x H x D) (overload relay with stand-alone installation support)					
• Screw terminals	mm	45 x 89 x 80	45 x 97 x 94	55 x 105 x 117	70 x 106 x 124
• Spring-type terminals	mm	45 x 102 x 80	45 x 116 x 95	55 x 105 x 117	70 x 106 x 124
General data					
Tripping in the event of		Overload, phase failure, and phase unbalance + ground fault (for 3RB31 only)			
Trip class acc. to IEC 60947-4-1		CLASS	3RB30: 10E, 20E; 3RB31: 5E, 10E, 20E or 30E adjustable		
Phase failure sensitivity		Yes			
Reset and recovery					
• Reset options after tripping		Manual and automatic RESET, 3RB31 has an integrated connection for electrical remote RESET (24 V DC)			
• Recovery time		Approx. 3 min			
- For automatic RESET		Immediately			
- For manual RESET		Immediately			
- For remote RESET		Immediately			
Features					
• Display of operating state on device		Yes, by means of switch position indicator slide			
• TEST function		Yes, test of electronics by pressing the TEST button/ test of auxiliary contacts and wiring of control circuit by actuating the switch position indicator slide/ self-monitoring			
• RESET button		Yes			
• STOP button		No			
Protection and operation of explosion-proof motors					
EC type-examination certificate number according to directive 2014/34/EU (ATEX)		PTB 09 ATEX 3001 ⚠ II (2) G [Ex e] [Ex d] [Ex px] ⚠ II (2) G [Ex t] [Ex p] see https://support.industry.siemens.com/cs/ww/en/view/40591327			
Ambient temperatures					
• Storage/transport	°C	-40 ... +80			
• Operation	°C	-25 ... +60			
• Temperature compensation	°C	+60			
• Permissible rated current at					
- Temperature inside control cabinet 60 °C	%	100			
- Temperature inside control cabinet 70 °C	%	On request			
Repeat terminals					
• Coil repeat terminals		Yes	Not required		
• Auxiliary contact repeat terminal		Yes	Not required		
Degree of protection acc. to IEC 60529					
• Screw terminals/spring-type terminals		IP20	- IP20 (front side) - Terminal IP00 (use additional terminal covers for higher degree of protection)		
• Straight-through transformers		--	IP20		
Touch protection acc. to IEC 60529		Finger-safe		Finger-safe, for vertical contact from the front	
Shock resistance with sine acc. to IEC 60068-2-27		g/ms	15/11 (signaling contact 97/98 in position "tripped": 9 g/11 ms)		15/11 (signaling contact 97/98 in position "tripped": 8 g/11 ms)

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications






Type			3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size			S00	S0	S2	S3
Dimensions (W x H x D) (overload relay with stand-alone installation support)						
• Screw terminals	mm		45 x 89 x 80	45 x 97 x 94	55 x 105 x 117	70 x 106 x 124
• Spring-type terminals	mm		45 x 102 x 80	45 x 116 x 95	55 x 105 x 117	70 x 106 x 124
General data (continued)						
Electromagnetic compatibility (EMC) – Interference immunity						
• Conductor-related interference						
- Burst acc. to IEC 61000-4-4 (corresponds to degree of severity 3)	kV		2 (power ports), 1 (signal port)			
- Surge acc. to IEC 61000-4-5 (corresponds to degree of severity 3)	kV		2 (line to earth), 1 (line to line)			
• Electrostatic discharge acc. to IEC 61000-4-2 (corresponds to degree of severity 3)	kV		8 (air discharge), 6 (contact discharge)			
• Field-related interference acc. to IEC 61000-4-3 (corresponds to degree of severity 3)	V/m		10			
Electromagnetic compatibility (EMC) – Emitted interference			Degree of severity B acc. to EN 55011 (CISPR 11) and EN 55022 (CISPR 22)			
Resistance to extreme climates – air humidity	%		95			
Installation altitude above sea level	m		Up to 2 000			
Mounting position			Any			
Type of mounting			Direct mounting/stand-alone installation with terminal support			

Type		3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size		S00	S0	S2	S3
Main circuit					
Rated insulation voltage U_i (pollution degree 3)	V	690		690 1 000 with straight-through transformer	1000
Rated impulse withstand voltage U_{imp}	kV	6		6 8 with straight-through transformer	8
Rated operational voltage U_e	V	690		690 1 000 with straight-through transformer	1000
Type of current					
• Direct current		No			
• Alternating current		Yes, 50/60 Hz ± 5%			
Current setting	A	0.1 ... 0.4	0.1 ... 0.4	12.5 ... 50	12.5 ... 50
	A	to 4 ... 16	to 10 ... 40	and 20 ... 80	and 32 ... 115
Heavy starting		see Manual			
Power loss per unit (max.)	W	0.1 ... 1.1	0.1 ... 4.5	0.5 ... 4.6	0.9 ... 4.6
Short-circuit protection					
• With fuse without contactor		See "Selection and ordering data", pages 7/101 ... 7/103			
• With fuse and contactor		"Short-Circuit Protection with Fuses/Motor Starter Protectors for Motor Feeders", see Configuration Manual.			
Protective separation between main and auxiliary current paths					
Acc. to IEC 60947-1 (pollution degree 2)					
• For systems with grounded neutral point	V	690			
• For systems with ungrounded neutral point	V	600			

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications

Type		3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size		S00	S0	S2	S3
Conductor cross-sections of main circuit					
Connection type		 Screw terminals			 Screw terminals with box terminal
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2		4 mm Allen screw
Operating devices	mm	∅ 5 ... 6	∅ 5 ... 6		4 mm Allen screw
Prescribed tightening torque	Nm	0.8 ... 1.2	2 ... 2.5		4.5 ... 6
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾ , 2 x (0.5 ... 4) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 10) ¹⁾	1 x (1 ... 50) ¹⁾ , 2 x (1 ... 35) ¹⁾	2 x (2.5 ... 16) ¹⁾ , 2 x (10 ... 50) ¹⁾ , 1 x (10 ... 70) ¹⁾
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 6) ¹⁾ , max. 1 x 10	2 x (1 ... 25) ¹⁾ , 1 x (1 ... 35) ¹⁾	2 x (2.5 ... 35) ¹⁾ , 1 x (2.5 ... 50) ¹⁾
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 14) ¹⁾ , 2 x 12	2 x (16 ... 12) ¹⁾ , 2 x (14 ... 8) ¹⁾	2 x (18 ... 2) ¹⁾ , 1 x (18 ... 1) ¹⁾	2 x (10 ... 1/0) ¹⁾ , 1 x (10 ... 2/0) ¹⁾
Removable box terminals²⁾					
• With copper bars ³⁾	mm	--	--	--	2 x 12 x 4
• With cable lugs ⁴⁾					
- Terminal screw		--	--	--	M6
- Prescribed tightening torque	Nm	--	--	--	4.5 ... 6
- Usable ring terminal lugs	mm	--	--	--	d ₂ = min. 6.3 d ₃ = max. 19
					
Connection type		 Spring-type terminals			
Operating devices	mm	3.0 x 0.5 and 3.5 x 0.5			
Conductor cross-sections (min./max.), 1 conductor can be connected					
• Solid or stranded	mm ²	1 x (0.5 ... 4)	1 x (1 ... 10)	--	
• Finely stranded without end sleeve	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	1 x (0.5 ... 2.5)	1 x (1 ... 6)	--	
• AWG cables, solid or stranded	AWG	1 x (20 ... 12)	1 x (18 ... 8)	--	
Connection type		 Straight-through transformers			
Diameter of opening	mm	--		15	18

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

²⁾ Cable lug and busbar connection possible after removing the box terminals.

³⁾ If bars larger than 12 mm x 10 mm are connected, a 3RT2946-4EA2 cover is needed to maintain the required phase clearance, [see page 7/105](#).



⁴⁾ If conductors larger than 25 mm² are connected, the 3RT2946-4EA2 cover is needed to maintain the required phase clearance, [see page 7/105](#).

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications

Type		3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size		S00	S0	S2	S3
Auxiliary circuit					
Number of NO contacts		1			
Number of NC contacts		1			
Auxiliary contacts – assignment		1 NO for the signal "tripped"; 1 NC for disconnecting the contactor			
Rated insulation voltage U_i (pollution degree 3)	V	300			
Rated impulse withstand voltage U_{imp}	kV	4			
Auxiliary contacts – contact rating					
• NC, NO contact with alternating current AC-14/AC-15, rated operational current I_e at U_e					
- 24 V	A	4			
- 120 V	A	4			
- 125 V	A	4			
- 250 V	A	3			
• NC, NO contacts with direct current DC-13, rated operational current I_e at U_e					
- 24 V	A	2			
- 60 V	A	0.55			
- 110 V	A	0.3			
- 125 V	A	0.3			
- 250 V	A	0.11			
• Conventional thermal current I_{th}	A	5			
• Contact reliability (suitability for PLC control; 17 V, 5 mA)		Yes			
Short-circuit protection					
• With fuse, operational class gG	A	6			
Ground-fault protection (only 3RB31)					
• Tripping value I_{Δ}		The information refers to sinusoidal residual currents at 50/60 Hz. > $0.75 \times I_{motor}$			
• Operating range I		Lower current setting < I_{motor} < $3.5 \times$ upper current setting			
• Response time t_{trip} (in steady-state condition)	s	< 1			
Integrated electrical remote RESET (only 3RB31)					
Connecting terminals A3, A4		24 V DC, max. 200 mA for approx. 20 ms, then < 10 mA			
Protective separation between auxiliary current paths acc. to IEC 60947-1	V	300			

Type		3RB3016, 3RB3113	3RB3026, 3RB3123	3RB3036, 3RB3133	3RB3046, 3RB3143
Size		S00	S0	S2	S3
CSA, UL, UR rated data					
Auxiliary circuit – switching capacity		B600, R300			
Conductor cross-sections for auxiliary circuit					
Connection type		 Screw terminals			
Terminal screw		M3, Pozidriv size 2			
Operating devices	mm	ø 5 ... 6			
Prescribed tightening torque	Nm	0.8 ... 1.2			
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	$1 \times (0.5 \dots 4)^{1)}$, $2 \times (0.5 \dots 2.5)^{1)}$			
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$1 \times (0.5 \dots 2.5)^{1)}$, $2 \times (0.5 \dots 1.5)^{1)}$			
• AWG cables, solid or stranded	AWG	$2 \times (20 \dots 14)$			
Connection type		 Spring-type terminals			
Operating devices	mm	3.0 x 0.5			
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected					
• Solid or stranded	mm ²	$2 \times (0.25 \dots 1.5)$			
• Finely stranded without end sleeve	mm ²	$2 \times (0.25 \dots 1.5)$			
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$2 \times (0.25 \dots 1.5)$			
• AWG cables, solid or stranded	AWG	$2 \times (24 \dots 16)$			

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

IE3/IE4 ready 3RB30, 3RB31 for standard applications

Selection and ordering data



3RB30 electronic overload relays, CLASS 10E

Features and technical specifications:

- Connection methods
 - Sizes S00 and S0:
Main and auxiliary circuit: Either screw or spring-type terminals
 - Sizes S2 and S3:
Main circuit: Screw terminals with box terminal or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection

- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring
- Sealable covers (optional accessory)

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G


Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals		SD	Spring-type terminals	
	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU
Size S00									
S00	Devices for mounting onto contactor ³⁾								
	0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3016-1RB0	2		3RB3016-1RE0	
	0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3016-1NB0	2		3RB3016-1NE0	
	0.37 ... 1.5	1 ... 4	20	▶	3RB3016-1PB0	2		3RB3016-1PE0	
	1.5 ... 5.5	3 ... 12	25	▶	3RB3016-1SB0	2		3RB3016-1SE0	
	2.2 ... 7.5	4 ... 16	25	▶	3RB3016-1TB0	2		3RB3016-1TE0	
Size S0									
S0	Devices for mounting onto contactor ³⁾								
	0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3026-1RB0	2		3RB3026-1RE0	
	0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3026-1NB0	2		3RB3026-1NE0	
	0.37 ... 1.5	1 ... 4	20	▶	3RB3026-1PB0	2		3RB3026-1PE0	
	1.5 ... 5.5	3 ... 12	25	▶	3RB3026-1SB0	2		3RB3026-1SE0	
	3 ... 11	6 ... 25	50	▶	3RB3026-1QB0	2		3RB3026-1QE0	
	5.5 ... 18.5	10 ... 40	50	▶	3RB3026-1VB0	2		3RB3026-1VE0	
Size S2									
S2	Devices with screw terminals (main current side) and for mounting onto contactor ³⁾								
	7.5 ... 22	12.5 ... 50	250	▶	3RB3036-1UB0	▶		3RB3036-1UD0	
	11 ... 37	20 ... 80	250	▶	3RB3036-1WB0	▶		3RB3036-1WD0	
	Devices with straight-through transformer for stand-alone installation								
	7.5 ... 22	12.5 ... 50	250	▶	3RB3036-1UW1	▶		3RB3036-1UX1	
	11 ... 37	20 ... 80	250	▶	3RB3036-1WW1	▶		3RB3036-1WX1	
Size S3									
S3	Devices with screw terminals (main current side) and for mounting onto contactor ³⁾								
	7.5 ... 22	12.5 ... 50	200	1	3RB3046-1UB0	2		3RB3046-1UD0	
	18.5 ... 55	32 ... 115	315	1	3RB3046-1XB0	2		3RB3046-1XD0	
	Devices with straight-through transformer for stand-alone installation								
	7.5 ... 22	12.5 ... 50	200	1	3RB3046-1UW1	2		3RB3046-1UX1	
	18.5 ... 55	32 ... 115	315	1	3RB3046-1XW1	2		3RB3046-1XX1	

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2".
For fuse values in connection with contactors, see Configuration Manual.

³⁾ With the appropriate terminal supports (see "Accessories", page 7/104), these overload relays can also be installed as stand-alone units.

Note:

For reliable operational current, note derating information, see Manual.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

3RB30, 3RB31 for standard applications **IE3/IE4 ready**

3RB30 electronic overload relays, CLASS 20E

Features and technical specifications:

- Connection methods
 - Sizes S00 and S0:
Main and auxiliary circuit: Either screw or spring-type terminals
 - Sizes S2 and S3:
Main circuit: Screw terminals with box terminal or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring
- Sealable covers (optional accessory)

PU (UNIT, SET, M) = 1
PS* = 1 UNIT
PG = 41G



3RB3016-2.B0



3RB3026-2.B0



3RB3036-2.B0





3RB3036-2.W1



3RB3046-2.B0



3RB3046-2.W1

Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals		SD	Spring-type terminals	
	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU

Size S00

S00 *Devices for mounting onto contactor³⁾*

0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3016-2RB0	2	3RB3016-2RE0
0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3016-2NB0	2	3RB3016-2NE0
0.37 ... 1.5	1 ... 4	20	▶	3RB3016-2PB0	2	3RB3016-2PE0
1.5 ... 5.5	3 ... 12	25	▶	3RB3016-2SB0	2	3RB3016-2SE0
2.2 ... 7.5	4 ... 16	25	▶	3RB3016-2TB0	2	3RB3016-2TE0

Size S0

S0 *Devices for mounting onto contactor³⁾*

0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3026-2RB0	2	3RB3026-2RE0
0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3026-2NB0	2	3RB3026-2NE0
0.37 ... 1.5	1 ... 4	20	▶	3RB3026-2PB0	2	3RB3026-2PE0
1.5 ... 5.5	3 ... 12	25	▶	3RB3026-2SB0	2	3RB3026-2SE0
3 ... 11	6 ... 25	50	▶	3RB3026-2QB0	2	3RB3026-2QE0
5.5 ... 18.5	10 ... 40	50	▶	3RB3026-2VB0	2	3RB3026-2VE0

Size S2

S2 *Devices with screw terminals (main current side) and for mounting onto contactor³⁾*

7.5 ... 22	12.5 ... 50	250	▶	3RB3036-2UB0	▶	3RB3036-2UD0
11 ... 37	20 ... 80	250	▶	3RB3036-2WB0	▶	3RB3036-2WD0

Devices with straight-through transformer for stand-alone installation

7.5 ... 22	12.5 ... 50	250	▶	3RB3036-2UW1	▶	3RB3036-2UX1
11 ... 37	20 ... 80	250	▶	3RB3036-2WW1	▶	3RB3036-2WX1

Size S3

S3 *Devices with screw terminals (main current side) and for mounting onto contactor³⁾*

7.5 ... 22	12.5 ... 50	200	1	3RB3046-2UB0	2	3RB3046-2UD0
18.5 ... 55	32 ... 115	315	1	3RB3046-2XB0	2	3RB3046-2XD0

Devices with straight-through transformer for stand-alone installation

7.5 ... 22	12.5 ... 50	200	1	3RB3046-2UW1	2	3RB3046-2UX1
18.5 ... 55	32 ... 115	315	1	3RB3046-2XW1	2	3RB3046-2XX1

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2".
For fuse values in connection with contactors, see Configuration Manual.

³⁾ With the appropriate terminal supports (see "Accessories", page 7/104), these overload relays can also be installed as stand-alone units.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays



IE3/IE4 ready 3RB30, 3RB31 for standard applications

3RB31 electronic overload relays, CLASS 5E, 10E, 20E or 30E (adjustable)

Features and technical specifications:

- Connection methods
 - Sizes S00 and S0:
Main and auxiliary circuit: Either screw or spring-type terminals
 - Sizes S2 and S3:
Main circuit: Screw terminals with box terminal or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection
- Internal ground-fault detection (activatable)
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Electrical remote RESET integrated
- Switch position indicator
- TEST function and self-monitoring
- Sealable covers (optional accessory)

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G


Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals		SD	Spring-type terminals	
	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU
Size S00									
S00	Devices for mounting onto contactor ³⁾								
	0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3113-4RB0		2	3RB3113-4RE0	
	0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3113-4NB0		2	3RB3113-4NE0	
	0.37 ... 1.5	1 ... 4	20	▶	3RB3113-4PB0		2	3RB3113-4PE0	
	1.5 ... 5.5	3 ... 12	25	▶	3RB3113-4SB0		2	3RB3113-4SE0	
	2.2 ... 7.5	4 ... 16	25	▶	3RB3113-4TB0		2	3RB3113-4TE0	
Size S0									
S0	Devices for mounting onto contactor ³⁾								
	0.04 ... 0.09	0.1 ... 0.4	4	▶	3RB3123-4RB0		2	3RB3123-4RE0	
	0.12 ... 0.37	0.32 ... 1.25	6	▶	3RB3123-4NB0		2	3RB3123-4NE0	
	0.37 ... 1.5	1 ... 4	20	▶	3RB3123-4PB0		2	3RB3123-4PE0	
	1.5 ... 5.5	3 ... 12	25	▶	3RB3123-4SB0		2	3RB3123-4SE0	
	3 ... 11	6 ... 25	50	▶	3RB3123-4QB0		2	3RB3123-4QE0	
	5.5 ... 18.5	10 ... 40	50	▶	3RB3123-4VB0		2	3RB3123-4VE0	
Size S2									
S2	Devices with screw terminals (main current side) and for mounting onto contactor ³⁾								
	7.5 ... 22	12.5 ... 50	250	▶	3RB3133-4UB0	▶		3RB3133-4UD0	
	11 ... 37	20 ... 80	250	▶	3RB3133-4WB0	▶		3RB3133-4WD0	
	Devices with straight-through transformer for stand-alone installation								
	7.5 ... 22	12.5 ... 50	250	▶	3RB3133-4UW1	▶		3RB3133-4UX1	
	11 ... 37	20 ... 80	250	▶	3RB3133-4WW1	▶		3RB3133-4WX1	
Size S3									
S3	Devices with screw terminals (main current side) and for mounting onto contactor ³⁾								
	7.5 ... 22	12.5 ... 50	200	1	3RB3143-4UB0		1	3RB3143-4UD0	
	18.5 ... 55	32 ... 115	315	1	3RB3143-4XB0		1	3RB3143-4XD0	
	Devices with straight-through transformer for stand-alone installation								
	7.5 ... 22	12.5 ... 50	200	1	3RB3143-4UW1		1	3RB3143-4UX1	
	18.5 ... 55	32 ... 115	315	1	3RB3143-4XW1		1	3RB3143-4XX1	

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2".
For fuse values in connection with contactors, see [Configuration Manual](#).

³⁾ With the appropriate terminal supports (see "Accessories", page 7/104), these overload relays can also be installed as stand-alone units.

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays










Accessories

Overview

The following optional accessories are available for the 3RB30/3RB31 electronic overload relays:

- Size-specific terminal support for stand-alone installation, in sizes S00 and S0 also with spring-type terminals
- Mechanical RESET (for all sizes)
- Cable release for resetting devices which are difficult to access (for all sizes)
- Sealable cover (for all sizes)

Selection and ordering data

Version	Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Terminal supports for stand-alone installation							
	Terminal supports for overload relays with screw terminals			Screw terminals 			
	For separate mounting of the overload relays; screw and snap-on mounting onto standard mounting rail	S00	▶	3RU2916-3AA01	1	1 unit	41F
		S0	▶	3RU2926-3AA01	1	1 unit	41F
		S2	▶	3RU2936-3AA01	1	1 unit	41F
		S3	1	3RU2946-3AA01	1	1 unit	41F
	Terminal supports for overload relays with spring-type terminals			Spring-type terminals 			
	For separate mounting of the overload relays; screw and snap-on mounting onto standard mounting rail	S00	5	3RU2916-3AC01	1	1 unit	41F
		S0	5	3RU2926-3AC01	1	1 unit	41F
							
							
							
							
Mechanical RESET							
	Resetting plungers, holders and formers		S00 ... S3 ▶	3RB3980-0A	1	1 unit	41F
	Pushbuttons with extended stroke (12 mm), IP65, ø 22 mm		S00 ... S3 ▶	3SU1200-0FB10-0AA0	1	1 unit	41J
	Extension plungers		S00 ... S3 ▶	3SU1900-0KG10-0AA0	1	1 unit	41J
	For compensation of the distance between a pushbutton and the unlatching button of the relay						
3RB3980-0A with pushbutton and extension plunger							

Overload Relays

SIRIUS 3RB3 Electronic Overload Relays

Accessories

Version	Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		d					

Cable releases with holder for RESET



3RB3980-0.

For \varnothing 6.5 mm holes in the control panel;
max. control panel thickness 8 mm

- Length 400 mm
- Length 600 mm

S00 ... S3 ▶
S00 ... S3 ▶

3RB3980-0B
3RB3980-0C

1 1 unit 41F
1 1 unit 41F

Sealable covers



3RB3984-0

For covering the setting knobs

S00 ... S3 ▶

3RB3984-0

1 1 unit 41F

Terminal covers



3RT2936-4EA2

Covers for devices with screw terminals (box terminals)
Additional touch protection for fastening to the box terminals

- Main current level

S2 2
S3 ▶

Screw terminals



3RT2936-4EA2
3RT2946-4EA2

1 1 unit 41B
1 1 unit 41B

General accessories

Version	Size	Color	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
				d					

Tools for opening spring-type terminals



3RA2908-1A

Screwdrivers
For all SIRIUS devices with spring-type terminals

Length approx. 200 mm, 3.0 mm x 0.5 mm

Titanium gray/black, partially insulated

Main and auxiliary circuit connection: 3RB3

2


Spring-type terminals



3RA2908-1A

1 1 unit 41B

Blank labels



3RT1900-1SB20

Unit labeling plates¹⁾
For SIRIUS devices

20 mm x 7 mm

Pastel turquoise

3RB3

20

3RT1900-1SB20

100 340 units 41B

20 mm x 7 mm

Titanium gray

3RB3

20

3RT2900-1SB20

100 340 units 41B

Adhesive inscription labels¹⁾
For SIRIUS devices

19 mm x 6 mm

Pastel turquoise

3RU2

15

3RT1900-1SB60

100 3 060 units 41B

19 mm x 6 mm


Zinc yellow

3RU2

15

3RT1900-1SD60

100 3 060 units 41B



3RT2900-1SB20

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/15).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications

Overview

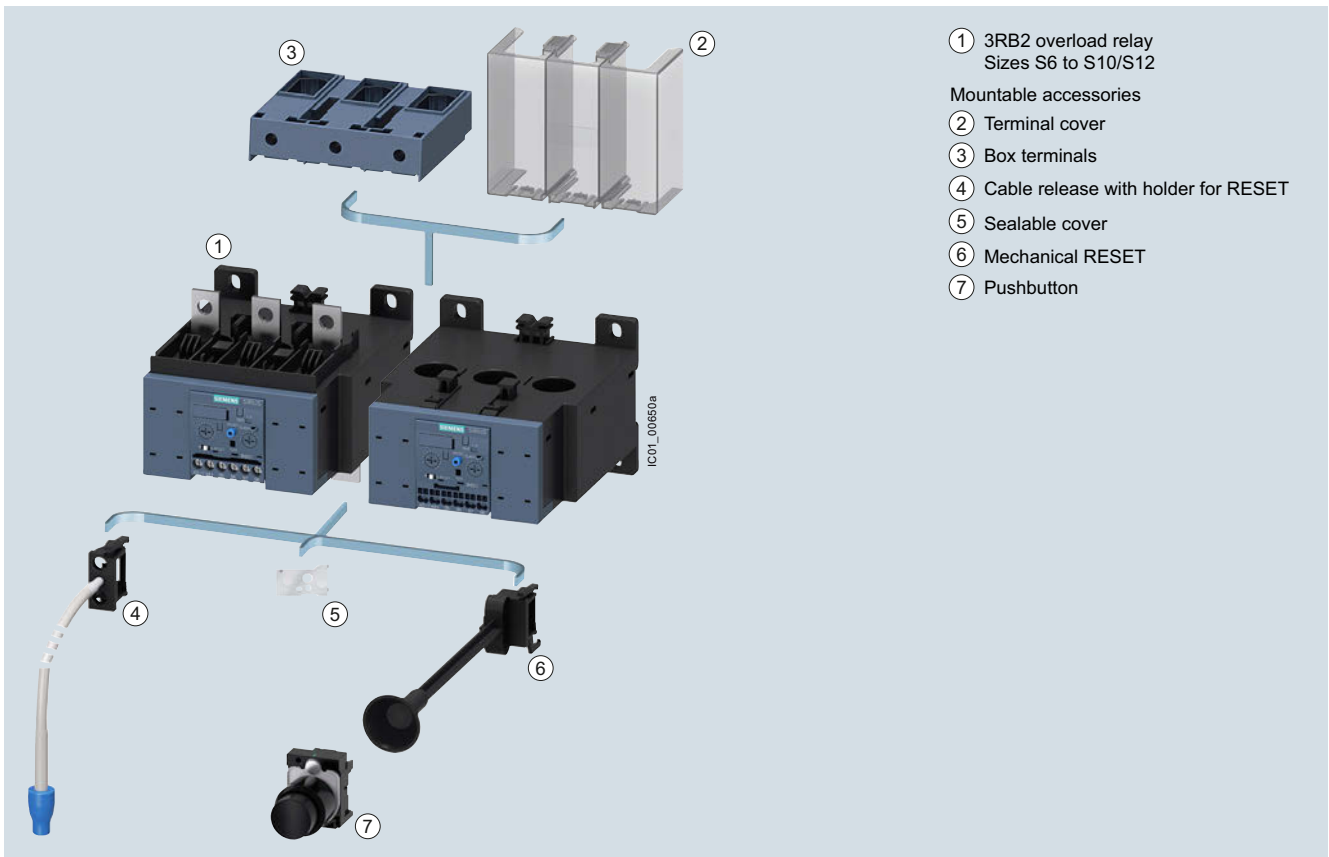
More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RB2

Application Manual "Controls with IE3/IE4 Motors", see
<https://support.industry.siemens.com/cs/ww/en/view/94770820>

Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays /
 SIRIUS 3RB Electronic Overload Relays", see
<https://support.industry.siemens.com/cs/ww/en/view/60298164>

Characteristics and certificates, see
<https://support.industry.siemens.com/cs/ww/en/ps/16278>

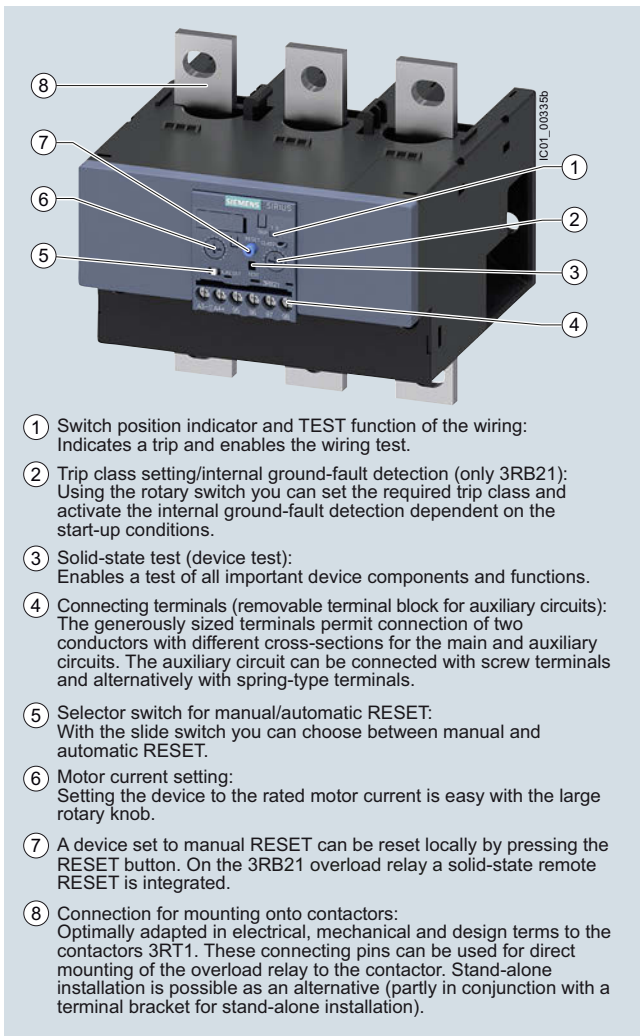


Mountable accessories for 3RB2 electronic overload relays (sizes S6 to S10/S12)

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications



SIRIUS 3RB2153-4FW2 electronic overload relay

The 3RB20 and 3RB21 electronic overload relays up to 630 A with internal power supply have been designed for current-dependent protection of loads with normal and heavy starting (see [Manual](#)) against excessive temperature rises due to overload, phase unbalance or phase failure.

An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current. This current rise is detected by the current transformers integrated into the devices and evaluated by corresponding solid-state circuits which then output a pulse to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor. The break time depends on the ratio between the tripping current and the current setting I_n and is stored in the form of a long-term stable tripping characteristic curve, see [Characteristic curves](#).

In addition to inverse-time delayed protection of loads against excessive temperature rises due to overload, phase unbalance and phase failure, the 3RB21 electronic overload relays also allow internal ground-fault detection (not possible in conjunction with contactor assemblies for star-delta (wye-delta) starting). This provides protection of loads against high-resistance short circuits due to damage to the insulation material, moisture, condensed water, etc.

The "tripped" status is signaled by means of a switch position indicator. The relay is reset manually or automatically after the recovery time has elapsed.

The 3RB2 electronic overload relays are suitable for operation with frequency converters, see [Manual](#).

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

For 3RB30 and 3RB31 overload relay sizes S00 to S3, see [page 7/101 onwards](#).

Use in hazardous areas

The 3RB20/3RB21 electronic overload relays are suitable for the overload protection of motors with the following types of protection:

- Ex II (2) G [Ex e] [Ex d] [Ex px]
- Ex II (2) D [Ex t] [Ex p]

EC type test certificate for Group II, Category (2) G/D exists. It has the number PTB 06 ATEX 3001.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications

Article No. scheme

Product versions		Article number						
Electronic overload relays		3RB2 □ □ □ - □ □ □ □						
Device type	e.g. 0 = standard device, with internal supply, for three-phase loads	□	□	□	-	□	□	□
Size, rated operational current and power	e.g. 5 = 200 A (90 kW) for size S6	□	□	□	□	□	□	□
Version of the automatic RESET, electrical remote RESET	e.g. 6 = switchable between manual/auto RESET	□	□	□	□	□	□	□
Trip class (CLASS)	e.g. 1 = CLASS 10E	□	□	□	□	□	□	□
Setting range of the overload release	e.g. F = 5 ... 200 A	□	□	□	□	□	□	□
Connection methods	e.g. C = busbar connections main circuit; screw terminals auxiliary circuit	□	□	□	□	□	□	□
Installation type	e.g. 2 = mounting on contactor and stand-alone installation	□	□	□	□	□	□	□
Example		3RB2	0	5	6	-	1	F C 2

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

The most important features and benefits of the 3RB20/3RB21 electronic overload relays are listed in the overview table (see "General data", page 7/75 onwards).

Application

Industries

The 3RB20 and 3RB21 electronic overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed protection of their electrical loads (e.g. motors) under normal and heavy starting conditions (CLASS 5E to 30E), minimize project completion times, inventories and energy consumption, and optimize plant availability and maintenance management.

Application

The 3RB20 and 3RB21 electronic overload relays have been designed for the protection of three-phase motors in sinusoidal 50/60 Hz voltage networks. The relays are not suitable for the protection of single-phase AC or DC loads.

The 3RU21 thermal overload relays or the 3RB22 to 3RB24 electronic overload relays can be used for single-phase AC loads. For DC loads we recommend the 3RU21 thermal overload relay.

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive ambient conditions, ageing and temperature fluctuations.

For the temperature range from -25 °C to +60 °C, the 3RB20 and 3RB21 electronic overload relays compensate the temperature in accordance with IEC 60947-4-1.

For the 3RB20 and 3RB21 electronic overload relays with the sizes S6, S10 and S12, the upper set value of the setting range must be reduced for ambient temperatures > 50 °C by a certain factor.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RB20 and 3RB21 electronic overload relays in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, see [Application Manual](#).

For more information, see page 1/7.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications

Technical specifications


More information

Configuration Manual "Configuring the SIRIUS Modular System – Selection data for Fuseless and Fused Load Feeders", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Manual "SIRIUS – SIRIUS 3RU Thermal Overload Relays / SIRIUS 3RB Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/60298164>

For Technical data, see <https://support.industry.siemens.com/cs/ww/en/ps/16278>

The following technical information is intended to provide an initial overview of the various types of device and functions.


Type		3RB2056, 3RB2153	3RB2066, 3RB2163
Size		S6	S10/S12
Dimensions (W x H x D) (overload relay with stand-alone installation support)	 mm	120 x 119 x 155	145 x 147 x 156
General data			
Tripping in the event of		Overload, phase failure, and phase unbalance + ground fault (for 3RB21 only)	
Trip class acc. to IEC 60947-4-1		CLASS 3RB20: 10E or 20E; 3RB21: 5E, 10E, 20E and 30E adjustable	
Phase failure sensitivity		Yes	
Overload warning		No	
Reset and recovery		3RB20: Manual and automatic RESET; 3RB21: Manual, automatic and remote RESET	
• Reset options after tripping			
• Recovery time		Approx. 3 min	
- For automatic RESET		Immediately	
- For manual RESET		Immediately	
- For remote RESET		Immediately	
Features		Yes, by means of switch position indicator slide	
• Display of operating state on device		Yes, test of electronics by pressing the TEST button/ test of auxiliary contacts and wiring of control circuit by actuating the switch position indicator slide/ self-monitoring	
• TEST function		Yes	
• RESET button		No	
• STOP button			
Protection and operation of explosion-proof motors		PTB 06 ATEX 3001 ⚠ II (2) G [Ex e] [Ex d] [Ex px] ⚠ II (2) G [Ex t] [Ex p] see https://support.industry.siemens.com/cs/ww/en/view/23814648	
Ambient temperatures			
• Storage/transport	°C	-40 ... +80	
• Operation	°C	-25 ... +60	
• Temperature compensation	°C	+60	
• Permissible rated current at			
- Temperature inside control cabinet 60 °C, stand-alone installation	%	100	100 or 90 ¹⁾
- Temperature inside control cabinet 60 °C, mounted on contactor	%	70	70
- Temperature inside control cabinet 70 °C	%	On request	
Degree of protection acc. to IEC 60529			
• Screw terminals/busbar connections		- IP20 (front side) - Terminal IP00 (use additional terminal covers for higher degree of protection)	
• Straight-through transformers		IP20	--

¹⁾ 90% for relay with current setting range 160 A to 630 A.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays




3RB20, 3RB21 for standard applications

Type				
Size				
Dimensions (W x H x D) (overload relay with stand-alone installation support)		mm	3RB2056, 3RB2153 S6 120 x 119 x 155	3RB2066, 3RB2163 S10/S12 145 x 147 x 156
General data (continued)				
Touch protection acc. to IEC 60529 <ul style="list-style-type: none">Screw terminals/busbar connectionsStraight-through transformers			Finger-safe with terminal covers for vertical contact from the front Finger-safe	
Shock resistance with sine acc. to IEC 60068-2-27			g/ms	15/11 (signaling contact 97/98 in position "tripped": 4 g/ 11 ms)
Electromagnetic compatibility (EMC) – Interference immunity				
<ul style="list-style-type: none">Conductor-related interference<ul style="list-style-type: none">Burst acc. to IEC 61000-4-4 (corresponds to degree of severity 3)Surge acc. to IEC 61000-4-5 (corresponds to degree of severity 3)Electrostatic discharge acc. to IEC 61000-4-2 (corresponds to degree of severity 3)Field-related interference acc. to IEC 61000-4-3 (corresponds to degree of severity 3)			kV kV kV V/m	2 (power ports), 1 (signal port) 2 (line to earth), 1 (line to line) 8 (air discharge), 6 (contact discharge) 10
Electromagnetic compatibility (EMC) – Emitted interference			Degree of severity B acc. to EN 55011 (CISPR 11) and EN 55022 (CISPR 22)	
Resistance to extreme climates – air humidity			%	100
Installation altitude above sea level			m	Up to 2 000
Mounting position			Any	
Type of mounting			Direct mounting/stand-alone installation	

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications

Type		3RB2056, 3RB2153	3RB2066, 3RB2163
Size		S6	S10/S12
Main circuit			
Rated insulation voltage U_i (pollution degree 3)	V	1 000	
Rated impulse withstand voltage U_{imp}	kV	8	
Rated operational voltage U_e	V	1 000	
Type of current			
• Direct current		No	
• Alternating current		Yes, 50/60 Hz ± 5 %	
Current setting	A	50 ... 200	55 ... 250, 160 ... 630
Power loss per unit (max.)	W	0.05	
Short-circuit protection			
• With fuse without contactor		See "Selection and ordering data", pages 7/113 ... 7/115	
• With fuse and contactor		"Short-Circuit Protection with Fuses/Motor Starter Protectors for Motor Feeders", see Configuration Manual.	
Protective separation between main and auxiliary current paths Acc. to IEC 60947-1 (pollution degree 2)			
• For systems with grounded neutral point	V	690	
• For systems with ungrounded neutral point	V	600	
Conductor cross-sections of the main circuit			
Connection type		 Screw terminals with box terminal	
Terminal screw	mm	4 mm Allen screw	5 mm Allen screw
Operating devices	mm	4 mm Allen screw	5 mm Allen screw
Prescribed tightening torque	Nm	1 ... 12	20 ... 22
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid	mm ²	--	--
• Finely stranded without end sleeve	mm ²	With 3RT1955-4G box terminal: 2 × (1 × max. 50, 1 × max. 70), 1 × (10 ... 70); With 3RT1956-4G box terminal: 2 × (1 × max. 95, 1 × max. 120), 1 × (10 ... 120)	2 × (50 ... 185), Front clamping point only: 1 × (70 ... 240); Rear clamping point only: 1 × (120 ... 185)
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	With 3RT1955-4G box terminal: 2 × (1 × max. 50, 1 × max. 70), 1 × (10 ... 70); With 3RT1956-4G box terminal: 2 × (1 × max. 95, 1 × max. 120), 1 × (10 ... 120)	2 × (50 ... 185), Front clamping point only: 1 × (70 ... 240); Rear clamping point only: 1 × (120 ... 185)
• Stranded	mm ²	With 3RT1955 -4G box terminal: 2 × (max. 70), 1 × (16 ... 70); With 3RT1956-4G box terminal: 2 × (max. 120), 1 × (16 ... 120)	2 × (70 ... 240), Front clamping point only: 1 × (95 ... 300); Rear clamping point only: 1 × (120 ... 240)
• AWG cables, solid or stranded	AWG	With 3RT1955-4G box terminal: 2 × (max. 1/0), 1 × (6 ... 2/0); With 3RT1956-4G box terminal: 2 × (max. 3/0), 1 × (6 ... 250 kcmil)	2 × (2/0 ... 500 kcmil), Front clamping point only: 1 × (3/0 ... 600 kcmil); Rear clamping point only: 1 × (250 kcmil ... 500 kcmil)
• Ribbon cables (Number x Width x Thickness)	mm	With 3RT1955-4G box terminal: 2 × (6 × 15.5 × 0.8), 1 × (3 × 9 × 0.8 ... 6 × 15.5 × 0.8); With 3RT1956-4G box terminal: 2 × (10 × 15.5 × 0.8), 1 × (3 × 9 × 0.8 ... 10 × 15.5 × 0.8)	2 × (20 × 24 × 0.5), 1 × (6 × 9 × 0.8 ... 20 × 24 × 0.5)
Connection type		 Busbar connections	
Terminal screw		M8 × 25	M10 × 30
Prescribed tightening torque	Nm	10 ... 14	14 ... 24
Conductor cross-sections (min./max.)			
• Finely stranded with cable lug	mm ²	16 ... 95 ¹⁾	50 ... 240 ²⁾
• Stranded with cable lug	mm ²	25 ... 120 ¹⁾	70 ... 240 ²⁾
• AWG cables, solid or stranded, with cable lug	AWG	4 ... 250 kcmil	2/0 ... 500 kcmil
• With connecting bars (max. width)	mm	15	25
Connection type		 Straight-through transformers	
Diameter of opening	mm	24.5	--



¹⁾ When connecting cable lugs according to DIN 46235 with conductor cross-sections of 95 mm² and more, the 3RT1956-4EA1 terminal cover must be used to ensure phase clearance, see page 7/116.

²⁾ When connecting cable lugs according to DIN 46234 for conductor cross-sections from 240 mm², as well as DIN 46235 for cable cross-sections from 185 mm², the 3RT1956-4EA1 terminal cover must be used to ensure phase clearance, see page 7/116.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications

Type		3RB2056, 3RB2153	3RB2066, 3RB2163
Size		S6	S10/S12
Auxiliary circuit			
Number of NO contacts		1	
Number of NC contacts		1	
Auxiliary contacts – assignment		1 NO for the signal "tripped"; 1 NC for disconnecting the contactor	
Rated insulation voltage U_i (pollution degree 3)	V	300	
Rated impulse withstand voltage U_{imp}	kV	4	
Auxiliary contacts – contact rating			
• NC contact with alternating current AC-14/AC-15, rated operational current I_e at U_e :			
- 24 V	A	4	
- 120 V	A	4	
- 125 V	A	4	
- 250 V	A	3	
• NO contact with alternating current AC-14/AC-15, rated operational current I_e at U_e :			
- 24 V	A	4	
- 120 V	A	4	
- 125 V	A	4	
- 250 V	A	3	
• NC, NO contacts with direct current DC-13, rated operational current I_e at U_e :			
- 24 V	A	2	
- 60 V	A	0.55	
- 110 V	A	0.3	
- 125 V	A	0.3	
- 250 V	A	0.11	
• Conventional thermal current I_{th}	A	5	
• Contact reliability (suitability for PLC control; 17 V, 5 mA)		Yes	
Short-circuit protection			
• With fuse, operational class gG	A	6	
Ground-fault protection (only 3RB21)			
• Tripping value I_{Δ}		The information refers to sinusoidal residual currents at 50/60 Hz. > $0.75 \times I_{motor}$	
• Operating range I		Lower current setting < I_{motor} < 3.5 × upper current setting	
• Response time t_{trip} (in steady-state condition)	s	< 1	
Integrated electrical remote RESET (only 3RB21)			
Connecting terminals A3, A4		24 V DC, 100 mA, 2.4 W short-term	
Protective separation between auxiliary current paths acc. to IEC 60947-1	V	300	
CSA, UL, UR rated data			
Auxiliary circuit – switching capacity		B300, R300	
Conductor cross-sections of the auxiliary circuit			
Connection type		 Screw terminals	
Terminal screw		M3, Pozidriv size 2	
Operating devices		mm	∅ 5 ... 6
Prescribed tightening torque		Nm	0.8 ... 1.2
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid and stranded	mm ²	$1 \times (0.5 \dots 4)^{1)}, 2 \times (0.5 \dots 2.5)^{1)}$	
• Finely stranded without end sleeve	mm ²	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$1 \times (0.5 \dots 2.5)^{1)}, 2 \times (0.5 \dots 1.5)^{1)}$	
• AWG cables, solid or stranded	AWG	$2 \times (20 \dots 14)$	
Connection type		 Spring-type terminals	
Operating devices		mm	3.0 x 0.5
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid and stranded	mm ²	$2 \times (0.25 \dots 1.5)$	
• Finely stranded without end sleeve	mm ²	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$2 \times (0.25 \dots 1.5)$	
• AWG cables, solid or stranded	AWG	$2 \times (24 \dots 16)$	

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

IE3/IE4 ready 3RB20, 3RB21 for standard applications

Selection and ordering data

3RB20 electronic overload relays for mounting onto contactors and stand-alone installation, CLASS 10E

Features and technical specifications:



- Connection methods
 - Size S6
Main circuit: With busbar connection or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
 - Sizes S10/S12:
Main circuit: With busbar connection
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G


3RB2056-1FW2



3RB2066-1MF2

Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals (on auxiliary current side)		SD	Spring-type terminals (on auxiliary current side)	
	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU

Size S6

Devices with busbar connection, for mounting onto contactor and stand-alone installation

S6	30 ... 90	50 ... 200	315	▶	3RB2056-1FC2	2	3RB2056-1FF2
----	-----------	------------	-----	---	---------------------	---	---------------------

Devices with straight-through transformer, for mounting onto contactor and stand-alone installation

For mounting onto S6 contactors with box terminals	30 ... 90	50 ... 200	315	▶	3RB2056-1FW2	▶	3RB2056-1FX2
--	-----------	------------	-----	---	---------------------	---	---------------------

Size S10/S12

Devices with busbar connection, for mounting onto contactor and stand-alone installation

S10/S12	30 ... 132	55 ... 250	400	▶	3RB2066-1GC2	▶	3RB2066-1GF2
and size 14 (3TF68/3TF69) ³⁾	90 ... 355	160 ... 630	800	▶	3RB2066-1MC2	▶	3RB2066-1MF2

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see [Configuration Manual](#).

³⁾ For 3TF68/3TF69 contactors, direct mounting is not possible.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB20, 3RB21 for standard applications **IE3/IE4 ready**

3RB20 electronic overload relays for mounting onto contactors and stand-alone installation, CLASS 20E

Features and technical specifications:

- Connection methods
 - Size S6
Main circuit: With busbar connection or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
 - Sizes S10/S12:
Main circuit: With busbar connection
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Switch position indicator
- TEST function and self-monitoring



PU (UNIT, SET, M) = 1
PS* = 1 UNIT
PG = 41G



3RB2056-2FW2



3RB2066-2MF2

Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals (on auxiliary current side)		SD	Spring-type terminals (on auxiliary current side)	
	kW	A	A	d	Article No.	Price per PU	d	Article No.	Price per PU
Size S6									
Devices with busbar connection, for mounting onto contactor and stand-alone installation									
S6	30 ... 90	50 ... 200	315	▶	3RB2056-2FC2	2	3RB2056-2FF2		
Devices with straight-through transformer, for mounting onto contactor and stand-alone installation									
For mounting onto S6 contactors with box terminals	30 ... 90	50 ... 200	315	▶	3RB2056-2FW2	▶	3RB2056-2FX2		
Size S10/S12 ²⁾									
Devices with busbar connection, for mounting onto contactor and stand-alone installation									
S10/S12	30 ... 132	55 ... 250	400	▶	3RB2066-2GC2	▶	3RB2066-2GF2		
and size 14 (3TF68/3TF69) ³⁾	90 ... 355	160 ... 630	800	▶	3RB2066-2MC2	▶	3RB2066-2MF2		

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see [Configuration Manual](#).

³⁾ For 3TF68/3TF69 contactors, direct mounting is not possible.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

IE3/IE4 ready 3RB20, 3RB21 for standard applications

3RB21 electronic overload relays for mounting onto contactors and stand-alone installation, CLASS 5E, 10E, 20E and 30E adjustable

Features and technical specifications:

- Connection methods
 - Size S6
Main circuit: With busbar connection or as straight-through transformer
Auxiliary circuit: Either screw or spring-type terminals
 - Sizes S10/S12:
Main circuit: With busbar connection
Auxiliary circuit: Either screw or spring-type terminals
- Overload protection, phase failure protection and unbalance protection
- Internal ground-fault detection (activatable)
- Internal power supply
- Auxiliary contacts 1 NO + 1 NC
- Manual and automatic RESET
- Electrical remote RESET integrated
- Switch position indicator
- TEST function and self-monitoring

 PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G


3RB2153-4FW2



3RB2163-4MF2

Size contactor	Rated power for three-phase motors, rated value ¹⁾	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ²⁾	SD	Screw terminals (on auxiliary current side)	SD	Spring-type terminals (on auxiliary current side)	
	kW	A	A	d	Article No.	Price per PU	Article No.	Price per PU

Size S6

Devices with busbar connection, for mounting onto contactor and stand-alone installation

S6	30 ... 90	50 ... 200	315	▶	3RB2153-4FC2	▶	3RB2153-4FF2
----	-----------	------------	-----	---	--------------	---	--------------

Devices with straight-through transformer, for mounting onto contactor and stand-alone installation

For mounting onto S6 contactors with box terminals	30 ... 90			▶	3RB2153-4FW2	▶	3RB2153-4FX2
--	-----------	--	--	---	--------------	---	--------------

Size S10/S12²⁾

Devices with busbar connection, for mounting onto contactor and stand-alone installation

S10/S12	30 ... 132	55 ... 250	400	▶	3RB2163-4GC2	▶	3RB2163-4GF2
and size 14 (3TF68/3TF69) ³⁾	90 ... 355	160 ... 630	800	▶	3RB2163-4MC2	▶	3RB2163-4MF2

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see [Configuration Manual](#).

³⁾ For 3TF68/3TF69 contactors, direct mounting is not possible.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Accessories for 3RB20, 3RB21








Overview

Overload relays for standard applications

The following optional accessories are available for the 3RB20 and 3RB21 electronic overload relays:

- Mechanical RESET (for all sizes)
- Cable release for resetting devices which are difficult to access (for all sizes)
- Sealable cover (for all sizes)
- Terminal covers for sizes S6 to S10/S12
- Box terminal blocks for sizes S6 and S10/S12

Selection and ordering data

Version	Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Mechanical RESET							
	Resetting plungers, holders and formers NEW	S6 ... S12 ▶	3RB3980-0A		1	1 unit	41F
	Pushbuttons with extended stroke (12 mm), IP65, Ø 22 mm	S6 ... S12 ▶	3SU1200-0FB10-0AA0		1	1 unit	41J
	Extension plungers For compensation of the distance between a pushbutton and the unlatching button of the relay	S6 ... S12 ▶	3SU1900-0KG10-0AA0		1	1 unit	41J
Cable releases with holder for RESET NEW							
	For Ø 6.5 mm holes in the control panel; max. control panel thickness 8 mm						
	<ul style="list-style-type: none"> • Length 400 mm • Length 600 mm 	S6 ... S12 ▶ S6 ... S12 ▶	3RB3980-0B 3RB3980-0C		1 1	1 unit 1 unit	41F 41F
Sealable covers							
	For covering the setting knobs	S6 ... S12 ▶	3RB3984-0		1	1 unit	41F
Terminal covers							
	Covers for cable lugs and busbar connections						
	<ul style="list-style-type: none"> • Length 100 mm • Length 120 mm 	S6 ▶ S10/S12 ▶	3RT1956-4EA1 3RT1966-4EA1		1 1	1 unit 1 unit	41B 41B
	Covers for box terminals						
	<ul style="list-style-type: none"> • Length 25 mm • Length 30 mm 	S6 ▶ S10/S12 ▶	3RT1956-4EA2 3RT1966-4EA2		1 1	1 unit 1 unit	41B 41B
	Covers for screw terminals Between contactor and overload relay, without box terminals (1 unit required per combination)						
		S6 ▶ S10/S12 ▶	3RT1956-4EA3 3RT1966-4EA3		1 1	1 unit 1 unit	41B 41B
Box terminal blocks							
	For round and ribbon cables						
	• Up to 70 mm ²	S6 ¹⁾ ▶	3RT1955-4G		1	1 unit	41B
	• Up to 120 mm ²	S6 ▶	3RT1956-4G		1	1 unit	41B
3RT195.-4G	• Up to 240 mm ²	S10/S12 ▶	3RT1966-4G		1	1 unit	41B





¹⁾ In the scope of supply for 3RT1054-1 contactors (55 kW).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Accessories for 3RB20, 3RB21

General accessories

Version	Size	Color	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
					d				
Tools for opening spring-type terminals									
 3RA2908-1A	Screwdrivers For all SIRIUS devices with spring-type terminals	Length approx. 200 mm, 3.0 mm x 0.5 mm	Titanium gray/black, partially insulated	Main and auxiliary circuit connection: 3RB2	2	Spring-type terminals 	1	1 unit	41B
						3RA2908-1A			
Blank labels									
 3RT1900-1SB20	Unit labeling plates¹⁾ For SIRIUS devices	20 mm x 7 mm	Pastel turquoise	3RB2	20	3RT1900-1SB20	100	340 units	41B
		20 mm x 7 mm	Titanium gray	3RB2	20	3RT2900-1SB20	100	340 units	41B
	Adhesive inscription labels¹⁾ For SIRIUS devices	19 mm x 6 mm	Pastel turquoise	3RU2	15	3RT1900-1SB60	100	3 060 units	41B
		19 mm x 6 mm	Zinc yellow	3RU2	15	3RT1900-1SD60	100	3 060 units	41B
 3RT2900-1SB20									

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/15).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

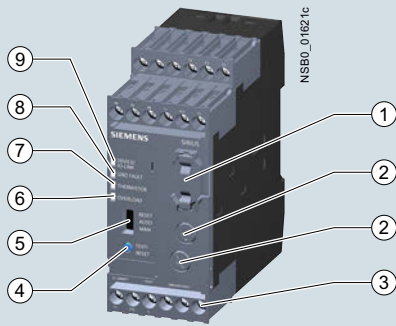
3RB22, 3RB23 for high-feature applications

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
Industry Mall, see www.siemens.com/product?3RB2

Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
Operating Instructions "3RB22, 3RB23 Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/21833251>
Characteristics and certificates, see <https://support.industry.siemens.com/cs/ww/en/ps/16280>



- ① 3RB2985 function expansion module:
Enables more functions to be added, e.g. internal ground-fault detection and/or an analog output with corresponding signals.
- ② Motor current and trip class setting:
Setting the device to the motor current and to the required trip class dependent on the start-up conditions is easy with the two rotary switches.
- ③ Connecting terminals (removable joint block):
The generously sized terminals permit connection of two conductors with different cross-sections for the auxiliary, control and sensor circuits. Connection is possible with screw connection and alternatively with spring-type connection.
- ④ Test/RESET button:
Enables testing of all important device components and functions, plus resetting of the device after a trip when manual RESET is selected.
- ⑤ Selector switch for manual/automatic RESET:
With this switch you can choose between manual and automatic RESET.
- ⑥ Red LED "OVERLOAD":
A continuous red light signals an active overload trip; a flickering red light signals an imminent trip (overload warning).
- ⑦ Red LED "THERMISTOR":
A continuous red light signals an active thermistor trip.
- ⑧ Red LED "GND FAULT":
A continuous red light signals a ground-fault tripping.
- ⑨ Green LED "READY":
A continuous green light signals that the device is working correctly.

SIRIUS 3RB22 and 3RB23 evaluation modules

The 3RB22 and 3RB23 electronic overload relays up to 630 A (up to 820 A possible in combination with a series transformer) are from a modular system and comprise an evaluation unit, a current measuring module and a connecting cable. The 3RB22 overload relays (with monostable auxiliary contacts) and the 3RB23 overload relays (with bistable auxiliary contacts) are supplied from an external voltage.

They have been designed for inverse-time delayed protection of loads with normal and heavy starting against excessive temperature rises due to overload, phase unbalance or phase failure. An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current.

This current rise is detected by means of a current measuring module (see page 7/136) and electronically evaluated by the evaluation module which is connected to it. The evaluation electronics sends a signal to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor.

The break time depends on the ratio between the tripping current and current setting I_e and is stored in the form of a long-term stable tripping characteristic curve (see Characteristics). The "tripped" status is signaled by means of a continuous red "OVERLOAD" LED.

The LED indicates imminent tripping of the relay due to overload, phase unbalance or phase failure by flickering when the limit current has been violated. In the case of the 3RB22 and 3RB23 overload relays this warning can also be issued through auxiliary contacts.

In addition to the described inverse-time delayed protection of loads against excessive temperature rises, the 3RB22 and 3RB23 electronic overload relays also allow direct temperature monitoring of the motor windings (full motor protection!) by connection with broken-wire interlock of a PTC sensor circuit. With this temperature-dependent protection, the loads can be protected against overheating caused, for example, indirectly by reduced coolant flow and which cannot be detected by means of the current alone. In the event of overheating, the devices switch off the contactor, and thus the load, by means of the auxiliary contacts. The "tripped" status is signaled by means of a continuously illuminated "THERMISTOR" LED.

To protect the loads against high-resistance short circuits due to damage to the insulation, humidity, condensed water, etc., the 3RB22 and 3RB23 electronic overload relays offer the possibility of internal ground fault monitoring in conjunction with a function expansion module (for details, see Operating Instructions, not possible in conjunction with contactor assemblies for start-delta (wye-delta) starting). In the event of a ground fault the 3RB22 and 3RB23 relays trip instantaneously.

The "tripped" status is signaled by means of a continuous red "Ground Fault" LED. Signaling through auxiliary contacts is also possible.

After tripping due to overload, phase unbalance, phase failure, thermistor or ground-fault tripping, the relay is reset manually or automatically after the recovery time has elapsed.

In conjunction with a function expansion module, the motor current measured by the microprocessor can be output in the form of a DC 4 mA to 20 mA analog signal for operating rotary coil instruments or for feeding into analog inputs of programmable logic controllers.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications

With an additional AS-Interface analog module the current values can also be transferred over the AS-i bus system.

The 3RB2 electronic overload relays are suitable for operation with frequency converters.

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

Article No. scheme

Product versions		Article number						
Electronic overload relays		3RB2 □ □ □ - □ □ □ □						
Device type	e.g. 2 = monostable device for high-feature applications, supplied from external source, for three-phase loads	□	□	□	□	□	□	□
Size, rated operational current and power	e.g. 8 = irrespective of size and current	□	□	□	□	□	□	□
Version of the automatic RESET, electrical remote RESET	e.g. 3 = switchable between manual/auto RESET, with integral electrical remote RESET	□	□	□	□	□	□	□
Trip class (CLASS)	e.g. 4 = CLASS 5E, 10E, 20E, 30E (adjustable)	□	□	□	□	□	□	□
Setting range of the overload release	e.g. A = none specified	□	□	□	□	□	□	□
Connection methods	e.g. A = screw terminals for auxiliary, control and main circuits	□	□	□	□	□	□	□
Installation type	e.g. 1 = stand-alone installation	□	□	□	□	□	□	□
Example		3RB2	2	8	3	-	4	A A 1

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

Use in hazardous areas

The 3RB22 electronic overload relays (monostable) with the 3RB29 current measuring module are suitable for the overload protection of explosion-proof motors.

EC type test certificate for category (2) G/D exists. It has the number PTB 05 ATEX 3022.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

The most important features and benefits of the 3RB22 and 3RB23 electronic overload relays are listed in the overview table, (see "General data", page 7/75 onwards).

Application

Industries

The 3RB22 and 3RB23 electronic overload relays are suitable for customers from all industries who want to guarantee optimum inverse-time delayed and temperature-dependent protection of their electrical loads (e. g. motors) under normal and heavy starting conditions (CLASS 5 to CLASS 30), minimize project completion times, inventories and power consumption, and optimize plant availability and maintenance management.

Application

The 3RB22 and 3RB23 devices have been designed for the protection of three-phase asynchronous and single-phase AC motors.

If single-phase AC motors are to be protected by the 3RB22 and 3RB23 electronic overload relays, the main current paths of the current measuring modules must be series-connected. For circuit diagrams, see [Operating Instructions](#).

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive ambient conditions, ageing and temperature fluctuations.

For the temperature range from -25 °C to +60 °C, the 3RB22 and 3RB23 electronic overload relays compensate the temperature in accordance with IEC 60947-4-1.

Configuration notes for use of the devices below -25 °C or above +60 °C on request.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RB22 and 3RB23 electronic overload relays in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, see [Application Manual](#).

For more information, see [page 1/7](#).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications

Technical specifications

More information


Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
 Configuration manual "Load feeders – Configuring the SIRIUS Modular System", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Operating Instructions "3RB22, 3RB23 Electronic Overload Relays", see <https://support.industry.siemens.com/cs/ww/en/view/21833251>
 Technical data, see <https://support.industry.siemens.com/cs/ww/en/ps/16280/td>

The following technical information is intended to provide an initial overview of the various types of device and functions.

Type – Overload relay: evaluation modules

Size contactor
 Dimensions of evaluation modules
 (W x H x D)



3RB2283-4A.1

S00 ... S10/S12
 45 x 111 x 95

3RB2383-4A.1

General data

Tripping in the event of

Overload, phase failure and phase unbalance (> 40% according to NEMA), + ground fault (with corresponding function expansion module) and activation of the thermistor motor protection (with closed PTC sensor circuit)

Trip class acc. to IEC 60947-4-1

CLASS 5E, 10E, 20E and 30E adjustable

Phase failure sensitivity

Yes

Overload warning

Yes, from $1.125 \times I_e$ for symmetrical loads and from $0.85 \times I_e$ for unsymmetrical loads

Reset and recovery

• Reset options after tripping

Manual, automatic and remote RESET

• Recovery time

- For automatic RESET

min.

- For tripping due to overcurrent: 3 (stored permanently)
 - For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature
 - For tripping due to a ground fault: no automatic RESET

- For manual RESET

min.

- For tripping due to overcurrent: 3 (stored permanently)
 - For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature
 - For tripping due to a ground fault: Immediately

- For remote RESET

min.

- For tripping due to overcurrent: 3 (stored permanently)
 - For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature
 - For tripping due to a ground fault: Immediately

Features

• Display of operating state on device

Yes, with four LEDs:
 - Green LED "READY"
 - Red LED "GROUND FAULT"
 - Red LED "THERMISTOR"
 - Red LED "OVERLOAD"

• TEST function

Yes, test of LEDs, electronics, auxiliary contacts and wiring of control circuit by pressing the button TEST/RESET/self-monitoring

• RESET button


Yes, with the TEST/RESET button

• STOP button

No

Protection and operation of explosion-proof motors

EC type-examination certificate number according to directive 2014/34/EU (ATEX)

PTB 05 ATEX 3022  II (2) GD
 see <https://support.automation.siemens.com/WW/view/en/23115758>

--

Ambient temperatures

• Storage/transport

°C

-40 ... +80

• Operation

°C

-25 ... +60

• Temperature compensation

°C

+60

• Permissible rated current

- Temperature inside control cabinet 60 °C

%

100

- Temperature inside control cabinet 70 °C

%

On request

Degree of protection acc. to IEC 60529

IP20

Touch protection acc. to IEC 60529

Finger-safe

Shock resistance with sine acc. to IEC 60068-2-27


g/ms

15/11

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications



Type – Overload relay: evaluation modules			3RB2283-4A.1	3RB2383-4A.1
Size contactor			S00 ... S10/S12	
Dimensions of evaluation modules (W x H x D)			45 x 111 x 95	
General data (continued)				
Electromagnetic compatibility (EMC) – Interference immunity				
• Conductor-related interference				
- Burst acc. to IEC 61000-4-4 (corresponds to degree of severity 3)	kV		2 (power ports), 1 (signal port)	
- Surge acc. to IEC 61000-4-5 (corresponds to degree of severity 3)	kV		2 (line to earth), 1 (line to line)	
• Electrostatic discharge acc. to IEC 61000-4-2 (corresponds to degree of severity 3)	kV		8 (air discharge), 6 (contact discharge)	
• Field-related interference acc. to IEC 61000-4-3 (corresponds to degree of severity 3)	V/m		10	
Electromagnetic compatibility (EMC) – Emitted interference			Degree of severity A according to EN 55011 (CISPR 11) and EN 55022 (CISPR 22)	
Resistance to extreme climates – Air humidity		%	100	
Installation altitude above sea level		m	Up to 2 000	
Mounting position			Any	
Type of mounting				
• Evaluation modules			Stand-alone installation	
• Current measuring module	Size		S00 to S3: Stand-alone installation, S6 and S10/S12: Stand-alone installation or mounting onto contactors	
Type – Overload relay: evaluation modules			3RB2283-4A.1, 3RB2383-4A.1	
Size contactor			S00 ... S10/S12	
Auxiliary circuit				
Number of NO contacts			2	
Number of NC contacts			2	
Number of CO contacts			--	
Auxiliary contacts – assignment			• Alternative 1 <ul style="list-style-type: none">- 1 NO for the signal "tripped by overload and/or thermistor",- 1 NC for disconnecting the contactor,- 1 NO for the signal "tripped by ground fault",- 1 NC for disconnecting the contactor or ¹⁾ <ul style="list-style-type: none">• Alternative 2<ul style="list-style-type: none">- 1 NO for the signal "tripped by overload and/or thermistor and/or ground fault",- 1 NC for disconnecting the contactor,- 1 NO for overload warning- 1 NC for disconnecting the contactor	
Rated insulation voltage U_i (pollution degree 3)		V	300	
Rated impulse withstand voltage U_{imp}		kV	4	
Auxiliary contacts – Contact rating				
• NC, NO contact with alternating current AC-14/AC-15, rated operational current I_e at U_e				
- 24 V	A		6	
- 120 V	A		6	
- 125 V	A		6	
- 250 V	A		3	
• NC, NO contacts with direct current DC-13, rated operational current I_e at U_e				
- 24 V	A		2	
- 60 V	A		0.55	
- 110 V	A		0.3	
- 125 V	A		0.3	
- 250 V	A		0.2	
• Conventional thermal current I_{th}	A		5	
• Contact reliability (suitability for PLC control; 17 V, 5 mA)			Yes	
Short-circuit protection				
• With fuse, operational class gG	A		6	
• With miniature circuit breaker, C characteristic	A		1.6	
Protective separation between auxiliary current paths acc. to IEC 60947-1		V	300	
CSA, UL, UR rated data				
Auxiliary circuit – Switching capacity			B300, R300	

¹⁾ The assignment of auxiliary contacts may be influenced by function expansion modules.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications

Type – Overload relay: evaluation modules		3RB2283-4A.1, 3RB2383-4A.1	
Size contactor		S00 ... S10/S12	
Control circuit			
Rated insulation voltage U_i (pollution degree 3)	V	300	
Rated impulse withstand voltage U_{imp}	kV	4	
Rated control supply voltage U_s			
• 50/60 Hz AC	V	24 ... 240	
• DC	V	24 ... 240	
Operating range			
• 50/60 Hz AC		$0.85 \times U_{s \min} \leq U_s \leq 1.1 \times U_{s \max}$	
• DC		$0.85 \times U_{s \min} \leq U_s \leq 1.1 \times U_{s \max}$	
Rated power			
• 50/60 Hz AC	W	0.5	
• DC	W	0.5	
Mains buffering time	ms	200	
Sensor circuit			
Thermistor motor protection (PTC thermistor sensor)			
• Summation cold resistance	kΩ	≤ 1.5	
• Response value	kΩ	3.4 ... 3.8	
• Return value	kΩ	1.5 ... 1.65	
Ground-fault detection		The information refers to sinusoidal residual currents at 50/60 Hz.	
• Tripping value $I_{\Delta}^{1)}$			
- For $0.3 \times I_e < I_{motor} < 2.0 \times I_e$		$> 0.3 \times I_e$	
- For $2.0 \times I_e < I_{motor} < 8.0 \times I_e$		$> 0.15 \times I_{motor}$	
• Response time t_{trip}	ms	500 ... 1 000	
Analog output ¹⁾²⁾			
Rated values			
• Output signal	mA	4 ... 20	
• Measuring range		0 ... $1.25 \times I_e$ 4 mA corresponds to $0 \times I_e$ 16.8 mA corresponds to $1.0 \times I_e$ 20 mA corresponds to $1.25 \times I_e$	
• Load, max.	Ω	100	
Conductor cross-sections for the auxiliary, control and sensor circuits as well as the analog output			
Connection type		 Screw terminals	
Terminal screw		M3, Pozidriv size 2	
Operating devices		mm	3.0 x 0.5
Prescribed tightening torque		Nm	0.8 ... 1.2
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid or stranded	mm ²	$1 \times (0.5 \dots 4)^3, 2 \times (0.5 \dots 2.5)^3$	
• Finely stranded without end sleeve	mm ²	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$1 \times (0.5 \dots 2.5)^3, 2 \times (0.5 \dots 1.5)^3$	
• AWG cables, solid or stranded	AWG	$2 \times (20 \dots 14)$	
Connection type		 Spring-type terminals	
Operating devices		mm	3.0 x 0.5
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid or stranded	mm ²	$2 \times (0.25 \dots 1.5)$	
• Finely stranded without end sleeve	mm ²	--	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$2 \times (0.25 \dots 1.5)$	
• AWG cables, solid or stranded	AWG	$2 \times (24 \dots 16)$	

¹⁾ For the 3RB22 and 3RB23 overload relays in combination with a corresponding function expansion module.

²⁾ Analog input modules, e.g. SM 331, must be configured for 4-wire measuring transducers. In this case the analog input module must not supply current to the analog output of the 3RB22 and 3RB23 relay.

³⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications

Functions of the 3RB22 and 3RB23 evaluation modules in combination with the 3RB2985 function expansion modules

Evaluation modules	With function expansion module	Basic functions	Inputs	T1/T2	Y1/Y2
			A1/A2		
3RB2283-4AA1 3RB2283-4AC1 3RB2383-4AA1 3RB2383-4AC1	--	Inverse-time delayed protection, temperature-dependent protection, electrical remote RESET, overload warning	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET
	3RB2985-2CA1	Inverse-time delayed protection, temperature-dependent protection, internal ground-fault detection, electrical remote RESET, overload warning	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET
	3RB2985-2CB1	Inverse-time delayed protection, temperature-dependent protection, internal ground-fault detection, electrical remote RESET, ground-fault signal	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET
	3RB2985-2AA0	Inverse-time delayed protection, temperature-dependent protection, electrical remote RESET, overload warning, analog output	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET
	3RB2985-2AA1	Inverse-time delayed protection, temperature-dependent protection, internal ground-fault detection, electrical remote RESET, overload warning, analog output	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET
	3RB2985-2AB1	Inverse-time delayed protection, temperature-dependent protection, internal ground-fault detection, electrical remote RESET, ground-fault signal, analog output	Power supply 24 ... 240 V AC/DC	Connection for PTC sensor	Electrical remote RESET

Evaluation modules	With function expansion module	Outputs	95/96 NC	97/98 NO	05/06 NC	07/08 NO
		I (-) / I (+)				
3RB2283-4AA1 3RB2283-4AC1 3RB2383-4AA1 3RB2383-4AC1	--	No	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection)	Signal "tripped"	Overload warning	Overload warning
	3RB2985-2CA1	No	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection + ground fault)	Signal "tripped"	Overload warning	Overload warning
	3RB2985-2CB1	No	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection)	Signal "tripped"	Disconnection of the contactor (ground fault)	Signal "ground-fault tripping"
	3RB2985-2AA0	Analog signal	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection)	Signal "tripped"	Overload warning	Overload warning
	3RB2985-2AA1	Analog signal	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection + ground fault)	Signal "tripped"	Overload warning	Overload warning
	3RB2985-2AB1	Analog signal	Disconnection of the contactor (inverse-time delayed/temperature-dependent protection)	Signal "tripped"	Disconnection of the contactor (ground fault)	Signal "ground-fault tripping"

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB22, 3RB23 for high-feature applications **IE3/IE4 ready**

3RB22 and 3RB23 electronic overload relays (evaluation modules) for full motor protection for stand-alone installation, CLASS 5E, 10E, 20E and 30E (adjustable)

Type	3RB2283-4A.1, 3RB2383-4A.1
Features and technical specifications	
Overload protection, phase failure protection and unbalance protection	✓
Supplied from an external source	✓
	24 ... 240 V AC/DC
Auxiliary contacts	✓
	2 NO + 2 NC
Electrical remote RESET integrated	✓
Four LEDs for operating and status displays	✓
TEST function and self-monitoring	✓
Internal ground-fault detection	✓
	(with function expansion module)
Screw or spring-type terminals for auxiliary, control and sensor circuits	✓
Input for PTC sensor circuit	✓
Analog output	✓
	(with function expansion module)

✓ Available

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G



3RB2283-4AA1,
3RB2383-4AA1



3RB2283-4AC1,
3RB2383-4AC1

Size contactor	Version	SD	Screw terminals		SD	Spring-type terminals	
			Article No.	Price per PU		Article No.	Price per PU
Evaluation modules							
S00 ... S12	Monostable	▶	3RB2283-4AA1		▶	3RB2283-4AC1	
	Bistable	▶	3RB2383-4AA1		▶	3RB2383-4AC1	

Evaluation modules

S00 ... S12
 Monostable
 Bistable

Notes:

Overview of overload relays – matching contactors, see [page 7/80](#).


Current measuring modules and related connecting cables, see [page 7/136](#), general accessories, see [page 7/137 onwards](#).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

IE3/IE4 ready 3RB22, 3RB23 for high-feature applications

Function expansion modules for 3RB22 and 3RB23 overload relays (evaluation modules)

Size contactor	Version	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Sizes S00 to S12								
 3RB2985-2..1	S00 ... S12	For plugging into evaluation module (1 unit)						
		Analog Basic 1 modules ¹⁾ Analog output DC 4 ... 20 mA, with overload warning	3RB22, 3RB23	▶ 3RB2985-2AA0		1	1 unit	41F
		Analog Basic 1 GF modules ¹⁾²⁾ Analog output DC 4 ... 20 mA, with internal ground-fault detection and overload warning	3RB22, 3RB23	▶ 3RB2985-2AA1		1	1 unit	41F
		Analog Basic 2 GF modules ¹⁾²⁾ Analog output DC 4 ... 20 mA, with internal ground-fault detection and ground-fault signaling	3RB22, 3RB23	▶ 3RB2985-2AB1		1	1 unit	41F
		Basic 1 GF modules ²⁾ with internal ground-fault detection and overload warning	3RB22, 3RB23	▶ 3RB2985-2CA1		1	1 unit	41F
		Basic 2 GF modules ²⁾ with internal ground-fault detection and ground-fault signaling	3RB22, 3RB23	▶ 3RB2985-2CB1		1	1 unit	41F

¹⁾ The analog signal 4 mA up to 20 mA DC can be used for operating rotary coil instruments or for feeding into analog inputs of programmable logic controllers.

²⁾ The following information on ground-fault protection refers to sinusoidal residual currents at 50/60 Hz:

- With a motor current of between 0.3 and 2 times the current setting I_e , the unit will trip at a ground-fault current equal to 30% of the current setting.
- With a motor current of between 2 and 8 times the current setting I_e , the unit will trip at a ground-fault current equal to 15% of the current setting.
- The response delay amounts to between 0.5 s and 1 s.

Note:

Analog input modules, e.g. SM 331, must be configured for 4-wire measuring transducers. In this case the analog input module must not supply current to the analog output of the 3RB22/3RB23 relay.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications

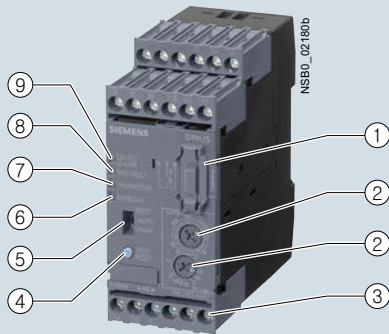
Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RB2

Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
 Manual "SIRIUS 3RB24 solid-state overload relay for IO-Link", see <https://support.industry.siemens.com/cs/ww/en/view/46165627>

Certificates, see <https://support.industry.siemens.com/cs/ww/en/ps/16281/cert>



- ① Plug-in point for operator panel:
enables connection of the 3RA6935-0A operator panel.
- ② Motor current and trip class setting:
Setting the device to the motor current and to the required trip class dependent on the start-up conditions is easy with the two rotary switches.
- ③ Connecting terminals (removable terminal block):
The generously sized terminals permit connection of two conductors with different cross-sections for the auxiliary, control and sensor circuits. Connection is possible with screw connection and alternatively with spring-type connection.
- ④ Test/RESET button:
Enables testing of all important device components and functions, plus resetting of the device after a trip when manual RESET is selected.
- ⑤ Selector switch for manual/automatic RESET:
With this switch you can choose between manual and automatic RESET.
- ⑥ Red LED "OVERLOAD":
A continuous red light signals an active overload trip; a flickering led light signals an imminent trip (overload warning).
- ⑦ Red LED "THERMISTOR":
A continuous red light signals an active thermistor trip.
- ⑧ Red LED "GND FAULT":
A continuous red light signals an active ground-fault trip.
- ⑨ Green LED "DEVICE/IO-Link":
A continuous green light signals that the device is working correctly, a green flickering light signals the communication through IO-Link.

SIRIUS 3RB24 evaluation module

The modular, IO-Link powered 3RB24 electronic overload relays (with monostable auxiliary contacts) up to 630 A (up to 820 A possible with a series transformer) have been designed for current-dependent protection of loads with normal and heavy starting against excessive temperature rises due to overload, phase unbalance or phase failure. It comprises an evaluation unit, a current measuring module and a connecting cable.

The evaluation module 3RB24 also offers an engine starter function: The contactors, which are connected via the auxiliary contacts, can also be actuated for operation via IO-Link. In this way, direct-on-line, reversing and wye-delta starters up to 630 A (or 830 A) can be connected to the controller wirelessly via the IO-Link controller.

An overload, phase unbalance or phase failure result in an increase of the motor current beyond the set rated motor current.

This current rise is detected by means of the current measuring module (see page 7/136) and electronically evaluated by the evaluation module which is connected to it. The evaluation electronics sends a signal to the auxiliary contacts. The auxiliary contacts then switch off the load by means of a contactor.

The break time depends on the ratio between the tripping current and current setting I_e and is stored in the form of a long-term stable tripping characteristic curve (see Manual). The "tripped" status is signaled by means of a continuously illuminated red "OVERLOAD" LED and also reported as a group fault via IO-Link.

The LED indicates imminent tripping of the relay due to overload, phase unbalance or phase failure by flickering when the limit current has been violated. This warning can also be reported to the higher-level PLC via IO-Link at the 3RB24 overload relays.

In addition to the described inverse-time delayed protection of loads against excessive temperature rises, the 3RB24 electronic overload relays also allow direct temperature monitoring of the motor windings (full motor protection!) by connection with broken-wire interlock of a PTC sensor circuit. With this temperature-dependent protection, the loads can be protected against overheating caused, for example, indirectly by reduced coolant flow and which cannot be detected by means of the current alone. In the event of overheating, the devices switch off the contactor, and thus the load, by means of the auxiliary contacts. The "tripped" status is signaled by means of a continuously illuminated "THERMISTOR" LED and also reported as a group fault via IO-Link.

To protect the loads against incomplete ground faults due to damage to the insulation, humidity, condensation, etc., the 3RB24 electronic overload relays offer the possibility of internal ground-fault detection (for details, see Manual, not possible in conjunction with contactor assemblies for star-delta (wye-delta) starting). In the event of a ground fault, the 3RB24 relays trip instantaneously.

The "tripped" status is signaled by means of a flashing red LED "Ground Fault" and reported at the overload relay 3RB24 as a group fault via IO-Link.

The reset after overload, phase unbalance, phase failure, thermistor or ground-fault tripping is performed manually by key on site, via IO-Link or by electrical remote RESET or automatically after the cooling time (motor model) or for thermistor protection after sufficient cooling. Trips in devices initiated by function monitoring systems (broken wire or short-circuit on the thermistor) can only be reset locally.

A motor current measured by the microprocessor can be output in the form of an analog signal DC 4 mA to 20 mA for operating rotary coil instruments or for feeding into analog inputs of programmable logic controllers.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications

The current values can be transmitted to the higher-level controller via IO-Link.

The 3RB24 electronic overload relay for IO-Link is suitable for operation with frequency converters.

The devices are manufactured in accordance with environmental guidelines and contain environmentally friendly and reusable materials. They comply with all important worldwide standards and approvals.

Use in hazardous areas

The 3RB24 electronic overload relays for IO-Link with the 3RB29 current measuring module are suitable for the overload protection of motors with the following types of protection:

- Ex II (2) G [Ex e] [Ex d] [Ex px]
- Ex II (2) D [Ex t] [Ex p]

EC type test certificate for Group II, Category (2) G/D exists. It has the number PTB 11 ATEX 3014.

Article No. scheme

Product versions		Article number							
Electronic overload relays		3RB2 □ □ □ - □ □ □ □							
Device type	e.g. 4 = monostable device for high-feature applications, supplied from external source (24 V DC), for three-phase loads	□							
Size, rated operational current and power	e.g. 8 = irrespective of size and current		□						
Version of the automatic RESET, electrical remote RESET	e.g. 3 = switchable between manual/auto RESET, with integral electrical remote RESET			□					
Trip class (CLASS)	e.g. 4 = CLASS 5E, 10E, 20E, 30E (adjustable)					□			
Setting range of the overload release	e.g. A = none specified						□		
Connection methods	e.g. A = screw terminals for auxiliary, control and main circuits							□	
Installation type	e.g. 1 = stand-alone installation								□
Example		3RB2 4 8 3 - 4 A A 1							

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications

Application

Industries

The 3RB24 electronic overload relays are suitable for customers from all industries who want to guarantee optimum current and temperature-dependent protection of their electrical loads (e.g. motors) under normal and heavy starting conditions (CLASS 5E to 30E), minimize project completion times, inventories and energy consumption, and optimize plant availability and maintenance management.

Application

The 3RB24 electronic overload relays have been designed for the protection of three-phase asynchronous and single-phase AC motors.

In addition to protection function, these devices can be used together with contactors as direct or reversing starters (star-delta (wye-delta) start also possible), which are controlled via IO-Link. This makes it possible to directly control drives via IO-Link from a higher-level controller or on site via the optional hand-held device and also, for example, to return current values directly via IO-Link.

If single-phase AC motors are to be protected by the 3RB24 electronic overload relays, the main current paths of the current measuring modules must be series-connected (circuit diagrams see [Manual](#)).

Ambient conditions

The devices are insensitive to external influences such as shocks, corrosive ambient conditions, ageing and temperature fluctuations.

In the temperature range from -25 °C to +60 °C, the 3RB24 electronic overload relays compensate the temperature in accordance with IEC 60947-4-1.

Configuration notes for use of the devices below -25 °C or above +60 °C on request.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RB24 electronic overload relays in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, see [Application Manual](#).

For more information, see [page 1/7](#).

Technical specifications

More information


Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>

Configuration Manual "Load feeders – Configuring the SIRIUS Modular System", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Manual "SIRIUS 3RB24 solid-state overload relay for IO-Link", see <https://support.industry.siemens.com/cs/ww/en/view/46165627>

Technical data, see <https://support.industry.siemens.com/cs/ww/en/ps/16281/td>


The following technical information is intended to provide an initial overview of the various types of device and functions.

Type – Overload relay: Evaluation modules			3RB2483-4A.1
Size contactor			S00 ... S10/S12
Dimensions of evaluation modules (W x H x D)			45 x 111 x 95
General data			
Tripping in the event of		Overload, phase failure and phase unbalance (> 40% according to NEMA), + ground fault (connectable and disconnectable) and activation of the thermistor motor protection (with closed PTC sensor circuit)	
Trip class acc. to IEC 60947-4-1		CLASS	5E, 10E, 20E and 30E adjustable
Phase failure sensitivity		Yes	
Overload warning		Yes, from $1.125 \times I_e$ for symmetrical loads and from $0.85 \times I_e$ for unsymmetrical loads	
Reset and recovery		Manual and automatic RESET, electrical remote RESET or through IO-Link	
<ul style="list-style-type: none">Reset options after trippingRecovery time			
- For automatic RESET	min.	<ul style="list-style-type: none">- For tripping due to overcurrent: 3 (stored permanently)- For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature- For tripping due to a ground fault: no automatic RESET	
- For manual RESET	min.	<ul style="list-style-type: none">- For tripping due to overcurrent: 3 (stored permanently)- For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature- For tripping due to a ground fault: Immediately	
- For remote RESET	min.	<ul style="list-style-type: none">- For tripping due to overcurrent: 3 (stored permanently)- For tripping by thermistor: Time until the motor temperature has fallen 5 K below the response temperature- For tripping due to a ground fault: Immediately	

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays



3RB24 for IO-Link for high-feature applications

Type – Overload relay: Evaluation modules Size contactor Dimensions of evaluation modules (W x H x D)			3RB2483-4A.1 S00 ... S10/S12 45 x 111 x 95
General data (continued)			
Features			
<ul style="list-style-type: none"> • Display of operating state on device 			Yes, with four LEDs: - Green LED "DEVICE/IO-LINK" - Red LED "GROUND FAULT" - Red LED "THERMISTOR" - Red LED "OVERLOAD"
<ul style="list-style-type: none"> • TEST function 			Yes, test of LEDs, electronics, auxiliary contacts and wiring of control circuit by pressing the button TEST/RESET/self-monitoring
<ul style="list-style-type: none"> • RESET button 			Yes, with the TEST/RESET button
<ul style="list-style-type: none"> • STOP button 			No
Protection and operation of explosion-proof motors			
EC type-examination certificate number according to directive 2014/34/EU (ATEX)			PTB 11 ATEX 3014 ⚠ II (2) G [Ex e] [Ex d] [Ex px] ⚠ II (2) G [Ex t] [Ex p] see https://support.industry.siemens.com/cs/ww/en/view/60524083
Ambient temperatures			
• Storage/transport	°C		-40 ... +80
• Operation	°C		-25 ... +60
• Temperature compensation	°C		+60
• Permissible rated current			
- Temperature inside control cabinet 60 °C	%		100
- Temperature inside control cabinet 70 °C	%		On request
Degree of protection acc. to IEC 60529			IP20
Touch protection acc. to IEC 60529			Finger-safe
Shock resistance with sine acc. to IEC 60068-2-27		g/ms	15/11
Electromagnetic compatibility (EMC) – Interference immunity			
• Conductor-related interference			
- Burst acc. to IEC 61000-4-4 (corresponds to degree of severity 3)	kV		2 (power ports), 1 (signal port)
- Surge acc. to IEC 61000-4-5 (corresponds to degree of severity 3)	kV		2 (line to earth), 1 (line to line)
• Electrostatic discharge acc. to IEC 61000-4-2 (corresponds to degree of severity 3)	kV		8 (air discharge), 6 (contact discharge)
• Field-related interference acc. to IEC 61000-4-3 (corresponds to degree of severity 3)	V/m		10
Electromagnetic compatibility (EMC) – Emitted interference			Degree of severity A according to EN 55011 (CISPR 11) and EN 55022 (CISPR 22)
Resistance to extreme climates – Air humidity		%	100
Installation altitude above sea level		m	Up to 2 000
Mounting position			Any
Type of mounting			
• Evaluation modules			Stand-alone installation
• Current measuring module	Size		S00 to S3: Stand-alone installation, S6 and S10/S12: Stand-alone installation or mounting onto contactors

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications



Type – Overload relay: Evaluation modules		3RB2483-4A.1
Size contactor		S00 ... S10/S12
Auxiliary circuit		
Number of auxiliary switches		1 CO contact, 1 NO contact connected in series internally
Auxiliary contacts – Assignment		<ul style="list-style-type: none"> 1 CO contact for selecting the contactor (for reversing starter function), actuated by the control system 1 NO contact for normal switching duty, actuated by the control system (opens automatically when tripping occurs)
Rated insulation voltage U_i (pollution degree 3)	V	300
Rated impulse withstand voltage U_{imp}	kV	4
Auxiliary contacts – Contact rating		
<ul style="list-style-type: none"> NC, NO contact with alternating current AC-14/AC-15, rated operational current I_e at U_e <ul style="list-style-type: none"> - 24 V - 120 V - 125 V - 250 V 	A	6
	A	6
	A	6
	A	3
<ul style="list-style-type: none"> NC, NO contacts with direct current DC-13, rated operational current I_e at U_e <ul style="list-style-type: none"> - 24 V - 60 V - 110 V - 125 V - 250 V 	A	2
	A	0.55
	A	0.3
	A	0.3
	A	0.2
Conventional thermal current I_{th}	A	5
Contact reliability (suitability for PLC control; 17 V, 5 mA)		Yes
Short-circuit protection		
With fuse, operational class gG	A	6
With miniature circuit breaker, C characteristic	A	1.6
Protective separation between auxiliary current paths acc. to IEC 60947-1	V	300
CSA, UL, UR rated data		
Auxiliary circuit – Switching capacity		B300, R300
Conductor cross-sections of the auxiliary circuit		
Connection type		 Screw terminals
Terminal screw		M3, Pozidriv size 2
Operating devices	mm	3.0 x 0.5
Prescribed tightening torque	Nm	0.8 ... 1.2
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected		
• Solid or stranded	mm ²	1 x (0.5 ... 4) ¹⁾ , 2 x (0.5 ... 2.5) ¹⁾
• Finely stranded without end sleeve	mm ²	--
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	1 x (0.5 ... 2.5) ¹⁾ , 2 x (0.5 ... 1.5) ¹⁾
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)
Connection type		 Spring-type terminals
Operating devices	mm	3.0 x 0.5
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected		
• Solid or stranded	mm ²	2 x (0.25 ... 1.5)
• Finely stranded without end sleeve	mm ²	--
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	2 x (0.25 ... 1.5)
• AWG cables, solid or stranded	AWG	2 x (24 ... 16)

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications

Type – Overload relay: Evaluation modules		3RB2483-4A.1
Size contactor		S00 ... S10/S12
Control circuit		
Rated insulation voltage U_i (pollution degree 3)	V	300
Rated impulse withstand voltage U_{imp}	kV	4
Rated control supply voltage U_s¹⁾		
• DC	V	24 through IO-Link
Operating range		
• DC		$0.85 \times U_{s \min} \leq U_s \leq 1.1 \times U_{s \max}$
Rated power		
• DC	W	0.5
Mains buffering time	ms	200
Sensor circuit		
Thermistor motor protection (PTC thermistor sensor)		
• Summation cold resistance	k Ω	≤ 1.5
• Response value	k Ω	3.4 ... 3.8
• Return value	k Ω	1.5 ... 1.65
Ground-fault detection		
• Tripping value I_{Δ}		The information refers to sinusoidal residual currents at 50/60 Hz.
- For $0.3 \times I_e < I_{motor} < 2.0 \times I_e$		$> 0.3 \times I_e$
- For $2.0 \times I_e < I_{motor} < 8.0 \times I_e$		$> 0.15 \times I_{motor}$
• Response time t_{trip}	ms	500 ... 1 000
Analog output¹⁾		
Rated values		
• Output signal	mA	4 ... 20
• Measuring range		0 ... $1.25 \times I_e$ 4 mA corresponds to $0 \times I_e$ 16.8 mA corresponds to $1.0 \times I_e$ 20 mA corresponds to $1.25 \times I_e$
• Load, max.	Ω	100
Conductor cross-sections for the control and sensor circuit as well as the analog output		
Connection type		 Screw terminals
Terminal screw		M3, Pozidriv size 2
Operating devices	mm	3.0 x 0.5
Prescribed tightening torque	Nm	0.8 ... 1.2
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected		
• Solid	mm ²	$1 \times (0.5 \dots 4)^2, 2 \times (0.5 \dots 2.5)^2$
• Finely stranded without end sleeve	mm ²	--
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$1 \times (0.5 \dots 2.5)^2, 2 \times (0.5 \dots 1.5)^2$
• Stranded	mm ²	--
• AWG cables, solid or stranded	AWG	$2 \times (20 \dots 14)$
Connection type		 Spring-type terminals
Operating devices	mm	3.0 x 0.5
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected		
• Solid	mm ²	$2 \times (0.25 \dots 1.5)$
• Finely stranded without end sleeve	mm ²	--
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	$2 \times (0.25 \dots 1.5)$
• Stranded	mm ²	$2 \times (0.25 \dots 1.5)$
• AWG cables, solid or stranded	AWG	$2 \times (24 \dots 16)$

¹⁾ Analog input modules, e.g. SM 331, must be configured for 4-wire measuring transducers. The analog input module may not supply current to the analog output of the 3RB24 overload relay.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

3RB24 for IO-Link for high-feature applications **IE3/IE4 ready**

3RB24 electronic overload relays (evaluation modules) for full motor protection for stand-alone installation, CLASS 5E, 10E, 20E and 30E (adjustable)

Type	3RB2483-4A.1
Features and technical specifications	
Overload protection, phase failure protection and unbalance protection	✓
Supplied from an external source	✓ 24 V DC through IO-Link
Direct-on-line or reversing starters (wye-delta starting also possible) controllable through IO-Link	✓
Auxiliary contacts	✓ 1 CO and 1 NO in series
Manual and automatic RESET	✓
Remote RESET	✓ (electrically or via IO-Link)
Four LEDs for operating and status displays	✓
TEST function and self-monitoring	✓
Internal ground-fault detection	✓
Screw or spring-type terminals for auxiliary, control and sensor circuits	✓
Input for PTC sensor circuit	✓
Analog output	✓
IO-Link-specific functions	
• Connection of direct-on-line, reversing and star-delta starters to the controller via IO-Link	✓
• On-site controlling of the starter using the hand-held device	✓
• Accessing process data (e.g. current values in all three phases) via IO-Link	✓
• Accessing parameterization and diagnostics data (e.g. tripped signals) via IO-Link	✓

✓ Available

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 UNIT
 PG = 41G



3RB2483-4AA1



3RB2483-4AC1

Size contactor	Version	SD	Screw terminals		SD	Spring-type terminals	
		d	Article No.	Price per PU d		Article No.	Price per PU

Evaluation modules		
S00 ... S12	Monostable	▶
		3RB2483-4AA1 2 3RB2483-4AC1

Notes:

- Overview table of overload relays – matching contactors, [see page 7/80](#)
- Analog input modules, e.g. SM 331, must be configured for 4-wire measuring transducers. The analog input module may not supply current to the analog output of the 3RB24 relay.

Current measuring modules and related connecting cables, [see page 7/136](#), "Accessories", [see page 7/137 onwards](#).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Current measuring modules for 3RB22, 3RB23, 3RB24

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RB2

Application Manual "Controls with IE3/IE4 Motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>

Other Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/16282/man>



SIRIUS 3RB2906 current measuring module

The current measuring modules are designed as system components for connecting to evaluation units 3RB22 to 3RB24. Using these evaluation units the motor current is measured and the measured value sent to the evaluation unit for evaluation.

The current measuring modules in sizes up to S3 are equipped with straight-through transformers and can be snap-fitted under the evaluation units. The larger evaluation units are installed directly on the contactor or as stand-alone units.

Application

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of current measuring modules for 3RB22, 3RB23, 3RB24 in conjunction with highly energy-efficient IE3/IE4 motors, please read the information on dimensioning and configuration, see [Application Manual](#).

For more information, see [page 1/7](#).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Current measuring modules for 3RB22, 3RB23, 3RB24

Technical specifications

More information

Manuals, see
<https://support.industry.siemens.com/cs/ww/en/ps/16282/man>


For Technical data, see
<https://support.industry.siemens.com/cs/ww/en/ps/16282/td>

The following technical information is intended to provide an initial overview of the various types of device and functions.

Type – Overload relays: Current measuring modules

Size contactor

Dimensions of current measuring modules
(W x H x D)



3RB2906	3RB2956	3RB2966
S00/S0	S2/S3	S6
45 x 84 x 45	55 x 94 x 72	120 x 119 x 145
		S10/S12
		145 x 147 x 148





Main circuit

Rated insulation voltage U_i (pollution degree 3)	V	1 000		
Rated impulse withstand voltage U_{imp}	kV	6	8	
Rated operational voltage U_e	V	1 000		
Type of current		No		
• Direct current		Yes, 50/60 Hz $\pm 5\%$		
• Alternating current				
Current setting	A	0.3 ... 3; 2.4 ... 25	10 ... 100	20 ... 200 63 ... 630
Power loss per unit (max.)	W	0.5		
Short-circuit protection		see "Selection and ordering data", page 7/136 See Configuration Manual "Load feeders – Configuring the SIRIUS Modular System"		
• With fuse without contactor				
• With fuse and contactor				
Degree of protection acc. to IEC 60529				
• Screw terminals/busbar connections		IP20	- IP20 (front side) - Terminal IP00 (use additional terminal covers for higher degree of protection)	
• Straight-through transformers		IP20	IP20	--
Touch protection acc. to IEC 60529				
• Screw terminals/busbar connections		Finger-safe	Finger-safe with terminal covers for vertical contact from the front	
• Straight-through transformers		Finger-safe	Finger-safe	--
Protective separation between main and auxiliary current paths Acc. to IEC 60947-1 (pollution degree 2)				
• For systems with grounded neutral point	V	690		
• For systems with ungrounded neutral point	V	600		

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Current measuring modules for 3RB22, 3RB23, 3RB24

Type – Overload relays: Current measuring modules				3RB2906		3RB2956	3RB2966
Size contactor				S00/S0	S2/S3	S6	S10/S12
Dimensions of current measuring modules (W x H x D)		mm		45 x 84 x 45	55 x 94 x 72	120 x 119 x 145	145 x 147 x 148
Conductor cross-sections of main circuit							
Connection type		 Screw terminals with box terminal					
Terminal screw	mm	--		4 mm Allen screw		5 mm Allen screw	
Operating devices	mm	--		4 mm Allen screw		5 mm Allen screw	
Prescribed tightening torque	Nm	--		10 ... 12		20 ... 22	
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected							
• Solid or stranded	mm ²	--		With 3RT1955-4G box terminal: 2 x (max. 70), 1 x (16 ... 70) With 3RT1956-4G box terminal: 2 x (max. 120), 1 x (16 ... 120)		2 x (70 ... 240), Front clamping point only: 1 x (95 ... 300) Rear clamping point only: 1 x (120 ... 240)	
• Finely stranded without end sleeve	mm ²	--		With 3RT1955-4G box terminal: 2 x (1 x max. 50, 1 x max. 70), 1 x (10 ... 70) With 3RT1956-4G box terminal: 2 x (1 x max. 95, 1 x max. 120), 1 x (10 ... 120)		2 x (50 ... 185), Front clamping point only: 1 x (70 ... 240) Rear clamping point only: 1 x (120 ... 185)	
• Finely stranded with end sleeve (DIN 46228-1)	mm ²	--		With 3RT1955-4G box terminal: 2 x (1 x max. 50, 1 x max. 70), 1 x (10 ... 70) With 3RT1956-4G box terminal: 2 x (1 x max. 95, 1 x max. 120), 1 x (10 ... 120)		2 x (50 ... 185), Front clamping point only: 1 x (70 ... 240) Rear clamping point only: 1 x (120 ... 185)	
• AWG cables	AWG	--		With 3RT1955-4G box terminal: 2 x (max. 1/0), 1 x (6 ... 2/0) With 3RT1956-4G box terminal: 2 x (max. 3/0), 1 x (6 ... 250 kcmil)		2 x (2/0 ... 500 kcmil), Front clamping point only: 1 x (3/0 ... 600 kcmil) Rear clamping point only: 1 x (250 kcmil ... 500 kcmil)	
• Ribbon cables (Number x Width x Thickness)	mm	--		With 3RT1955-4G box terminal: 2 x (6 x 15.5 x 0.8), 1 x (3 x 9 x 0.8 ... 6 x 15.5 x 0.8) With 3RT1956-4G box terminal: 2 x (10 x 15.5 x 0.8), 1 x (3 x 9 x 0.8 ... 10 x 15.5 x 0.8)		2 x (20 x 24 x 0.5), 1 x (6 x 9 x 0.8 ... 20 x 24 x 0.5)	
Connection type		 Busbar connections					
Terminal screw		--		M8 x 25		M10 x 30	
Prescribed tightening torque	Nm	--		10 ... 14		14 ... 24	
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected							
• Solid with cable lug	mm ²	--		16 ... 95 ¹⁾		50 ... 240 ²⁾	
• Stranded with cable lug	mm ²	--		25 ... 120 ¹⁾		70 ... 240 ²⁾	
• AWG cables, solid or stranded, with cable lug	AWG	--		4 ... 250 kcmil		2/0 ... 500 kcmil	
• With connecting bars (max. width)	mm	--		17		25	
Connection type		 Straight-through transformers					
Diameter of opening	mm	7.5	14	25	--		

¹⁾ When connecting cable lugs according to DIN 46235 with conductor cross-sections of 95 mm² and more, the 3RT1956-4EA1 terminal cover must be used to ensure phase clearance, [see page 7/137](#).

²⁾ When connecting cable lugs according to DIN 46234 for conductor cross-sections from 240 mm², as well as DIN 46235 for cable cross-sections from 185 mm², the 3RT1956-4EA1 terminal cover must be used to ensure phase clearance, [see page 7/137](#).

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Current measuring modules for 3RB22, 3RB23, 3RB24 **IE3/IE4 ready**

Selection and ordering data

Current measuring modules (essential accessories)



3RB2906-2BG1,
3RB2906-2DG1

3RB2906-2JG1

3RB2956-2TG2

3RB2966-2WH2

Size contactor	Current setting value of the inverse-time delayed overload release	Short-circuit protection with fuse, type of coordination "2", operational class gG ¹⁾	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	A	A		d					
Sizes S00/S0									
Devices with straight-through transformer for stand-alone installation									
S00/S0	0.3 ... 3	20	3RB22 to 3RB24	▶	3RB2906-2BG1		1	1 unit	41G
	2.4 ... 25	63		▶	3RB2906-2DG1		1	1 unit	41G
Sizes S2/S3									
Devices with straight-through transformer for stand-alone installation									
S2/S3	10 ... 100	315	3RB22 to 3RB24	▶	3RB2906-2JG1		1	1 unit	41G
Size S6									
Devices with busbar connection, for mounting onto contactor and stand-alone installation									
S6	20 ... 200	315	3RB22 to 3RB24	▶	3RB2956-2TH2		1	1 unit	41G
Devices with straight-through transformer, for mounting onto contactor and stand-alone installation									
For mounting onto S6 con- tactors with box terminals	20 ... 200	315	3RB22 to 3RB24	▶	3RB2956-2TG2		1	1 unit	41G
Sizes S10/S12²⁾									
Devices with busbar connection, for mounting onto contactor and stand-alone installation									
S10/S12 and size 14 (3TF68/3TF69) ²⁾	63 ... 630	800	3RB22 to 3RB24	▶	3RB2966-2WH2		1	1 unit	41G


¹⁾ Maximum protection by fuse only for overload relays, type of coordination "2". For fuse values in connection with contactors, see Configuration Manual "Load feeders – Configuring the SIRIUS Modular System".

²⁾ For 3TF68/3TF69 contactors, direct mounting is not possible.

Note:

The connecting cable between the current measuring module and the evaluation module is not included in the scope of supply; please order separately (see "Accessories").

Accessories

Size con- tactor	Version	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
				d				
Connecting cables (essential accessories)								
	S00 ... S3	For connection between evaluation module and current measuring module • Length 0.1 m (only for mounting of the evaluation module directly onto the current measuring module)	3RB22 to 3RB24	▶	3RB2987-2B	1	1 unit	41F
	S00 ... S12	• Length 0.5 m	3RB22 to 3RB24	▶		3RB2987-2D	1	1 unit

Additional general accessories, see page 7/137.

Overload Relays

SIRIUS 3RB2 Electronic Overload Relays

Accessories for 3RB22, 3RB23, 3RB24

Overview

More information

Homepage, see <http://www.siemens.com/sirius-overloadrelays>
 Industry Mall, see www.siemens.com/product?3RB2


Manuals, see <https://support.industry.siemens.com/cs/ww/en/ps/16283/man>

The following optional accessories are available for the 3RB22 to 3RB24 electronic overload relays:





- Operator panel for the evaluation modules 3RB24
- Sealable cover for the evaluation modules 3RB22 to 3RB24
- Terminal covers for the 3RB29 current measuring modules size S6 and S10/S12
- Box terminal blocks for the 3RB29 current measuring modules size S6 and S10/S12
- Push-in lugs for screw fixing for 3RB22 to 3RB24 evaluation modules and 3RB2906 current measuring modules

Selection and ordering data

Accessories for 3RB24 overload relays

Version	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Operator panels for evaluation modules							
 3RA6935-0A	Operator panels (set)	3RB24	10	3RA6935-0A	1	1 unit	42F
	One set comprises: • 1 x operator panel • 1 x 3RA6936-0A enabling module • 1 x 3RA6936-0B interface cover • 1 x fixing terminal Note: The connecting cable between the evaluation module and the operator panel is not included in the scope of supply; please order separately.						
	Connecting cable	3RB24	▶	3UF7933-0BA00-0	1	1 unit	42J
	Enabling modules (replacement)	3RB24	10	3RA6936-0A	1	1 unit	42F
	Interface covers	3RB24	10	3RA6936-0B	1	5 units	42F

General accessories



Version	Size	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
				d				
Sealable covers for evaluation modules								
 3RB2984-2	For covering the setting knobs	--	3RB22 to 3RB24	▶	3RB2984-2	1	10 units	41F
Terminal covers for current measuring modules								
 3RT1956-4EA1	Covers for cable lugs and busbar connections							
	• Length 100 mm	S6	3RB2956	▶	3RT1956-4EA1	1	1 unit	41B
 3RT1956-4EA2	• Length 120 mm	S10/S12	3RB2966	▶	3RT1966-4EA1	1	1 unit	41B
	Covers for box terminals							
	• Length 25 mm	S6	3RB2956	▶	3RT1956-4EA2	1	1 unit	41B
	• Length 30 mm	S10/S12	3RB2966	▶	3RT1966-4EA2	1	1 unit	41B
	Covers for screw terminals	S6	3RB2956	▶	3RT1956-4EA3	1	1 unit	41B
	Between contactor and overload relay, without box terminals (1 unit required per combination)	S10/S12	3RB2966	▶	3RT1966-4EA3	1	1 unit	41B
Box terminal blocks for current measuring modules								
 3RT195.-4G	For round and ribbon cables							
	• Up to 70 mm ²	S6 ¹⁾	3RB2956	▶	3RT1955-4G	1	1 unit	41B
	• Up to 120 mm ²	S6	3RB2956	▶	3RT1956-4G	1	1 unit	41B
	• Up to 240 mm ²	S10/S12	3RB2966	▶	3RT1966-4G	1	1 unit	41B

¹⁾ In the scope of supply for 3RT1054-1 contactors (55 kW).

Overload Relays





SIRIUS 3RB2 Electronic Overload Relays

Accessories for 3RB22, 3RB23, 3RB24

Version	Size	For overload relays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Push-in lugs for evaluation modules and current measuring modules								
	For screw fixing the evaluation modules	--	3RB22 to 3RB24	5	3RP1903	1	10 units	41H
	For screw fixing the current measuring modules (2 units per module)	S00 .. S3	3RB2906	2	3RB1900-0B	100	10 units	41F

3RP1903

3RB1900-0B

Version	Size	Color	For overload re- lays	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
					d				
Tools for opening spring-type terminals									
	Screwdrivers For all SIRIUS devices with spring-type terminals	Length approx. 200 mm, 3.0 mm x 0.5 mm	Titanium gray/ black, partially insulated	Main and auxiliary circuit connection: 3RB2	2	Spring-type terminals 			
3RA2908-1A						3RA2908-1A	1	1 unit	41B
Blank labels									
	Unit labeling plates¹⁾ For SIRIUS devices	20 mm x 7 mm	Pastel turquoise	3RB2	20	3RT1900-1SB20	100	340 units	41B
		20 mm x 7 mm	Titanium gray	3RB2	20	3RT2900-1SB20	100	340 units	41B
	Adhesive inscription labels¹⁾ For SIRIUS devices	19 mm x 6 mm	Pastel turquoise	3RU2	15	3RT1900-1SB60	100	3 060 units	41B
		19 mm x 6 mm	Zinc yellow	3RU2	15	3RT1900-1SD60	100	3 060 units	41B

3RT1900-1SB20

3RT2900-1SB20

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see page 16/15).